



## Sling Hook Replacement Latches (New Style)

- Replacement Latches for Cam-Alloy & Quik-Alloy Sling Hooks
- New Latch Design Fits Newer Integrated Tip Sling Hooks

Chain Size	Catalog No.	UPC No. 020418	Cam-Alloy Sling Hook	Cam-Alloy Sling Hook with Latch	Quik-Alloy Sling Hook	Quik-Alloy Sling Hook with Latch	Latch Marking	Weight Each
9/32 in	7506495	223853	5646415	5646495	5746415	5746495	CC-4	0.08 lb
3/8 in	7506695	223846	5646615	5646695	5746615	5746695	CC-5	0.08 lb
1/2 in	7506895	225161	5646815	5646895	5746815	5746895	CC-7	0.14 lb
5/8 in	7507095	225178	5647015	-	5747015	5747095	CC-8	0.18 lb
3/4 in	7507295	225154	5647215	-	5747215	5747295	CC-9	0.52 lb



## Cam-Alloy and Quik-Alloy Latches (Old Style)


- Replacement Latches for Older Cam-Alloy® and Quik-Alloy® Sling Hooks
- Clapper Latch Design Fits Older Style Non-Integrated Tip Sling Hooks

Chain Size	Catalog No.	UPC No. 020418	Cam-Alloy Sling Hook	Cam-Alloy Sling Hook with Latch	Quik-Alloy Sling Hook	Quik-Alloy Sling Hook with Latch
9/32 in	3990401	072758	5644415	5644495	5744415	5744495
3/8 in	3990601	072772	5644615	5644695	5744615	5744695
1/2 in	3990701	072789	5644815	5644895	5744815	5744895
5/8 in & 3/4 in	3991001	072819	5645015 & 5645215	5645095 & 5645295	5745015 & 5745215	5745095 & 5745295
7/8 in & 1 in	3991409	177163	5645415 & 5641615	5645495 & 5641695	-	-



## Cam-Alloy Foundry Hooks

- For Use with Grade 80/100 Chain Slings
- 4 to 1 Design Factor
- Meet or Exceed All Requirements of ASME B30.9 and B30.10
- 100% Proof Tested in Accordance with ASTM A952
- Additionally Hallmarked with "USA" and Date Code
- Made in the USA
- DO NOT EXCEED THE WORKING LOAD LIMIT

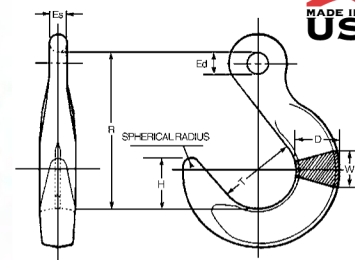

Chain Size	Catalog No.	UPC No. 020418	Hook No.	Grade	Working Load Limit	Weight Each	D Dim.	Ed Dim.	Es Dim.	H Dim.	R Dim.	T Dim.	W Dim.	Spherical Radius
9/32 in	5664415	182457	C-498	100	4300 lb	2.20 lb	1.3 in	0.62 in	0.47 in	1.56 in	4.75 in	2.50 in	1.00 in	0.25 in
3/8 in	5664615	182464	C-499	100	8800 lb	3.90 lb	1.56 in	0.75 in	0.62 in	1.87 in	5.75 in	3.00 in	1.25 in	0.31 in
1/2 in	5664815	182471	C-500	100	15000 lb	6.70 lb	1.81 in	1.00 in	0.75 in	2.25 in	6.87 in	3.50 in	1.50 in	0.37 in
5/8 in	5665015	182488	C-501	100	22600 lb	10.50 lb	2.33 in	1.25 in	0.87 in	2.62 in	8.06 in	4.00 in	1.75 in	0.44 in
3/4 in	5665215	182495	C-502	100	35300 lb	15.60 lb	2.81 in	1.50 in	1.00 in	3.00 in	9.25 in	4.50 in	2.00 in	0.50 in
7/8 in	5665415	152948	C-503	100	42700 lb	24.00 lb	3.08 in	1.84 in	1.12 in	3.37 in	10.37 in	5.00 in	2.25 in	0.56 in
1 in	5661615	078965	C-504	80	47700 lb	34.10 lb	3.25 in	2.09 in	1.25 in	3.75 in	11.56 in	5.50 in	2.50 in	0.62 in
1-1/4 in	5662015	078972	C-505	80	72300 lb	52.50 lb	3.88 in	2.47 in	1.37 in	4.25 in	12.87 in	6.00 in	3.00 in	0.75 in

SLINGS