




Self-Locking Swivel Hooks

- Meet or Exceed All Requirements of ASME B30.9 and B30.10
- Fatigue and 100% Proof Tested in Accordance with ASTM A952
- Additionally Hallmarked with "USA" and Date Code
- Meets the Intent of OSHA Regulation 1926.550(g)(4)(iv)(b)
- Latch Closes Automatically Under Load
- Working Load Limit Rating of 5 to 1 to Meet Design Requirements of Wire Rope Slings
- Made in the USA
- DO NOT EXCEED THE WORKING LOAD LIMIT
- HOOK IS NOT DESIGNED TO SWIVEL UNDER LOAD

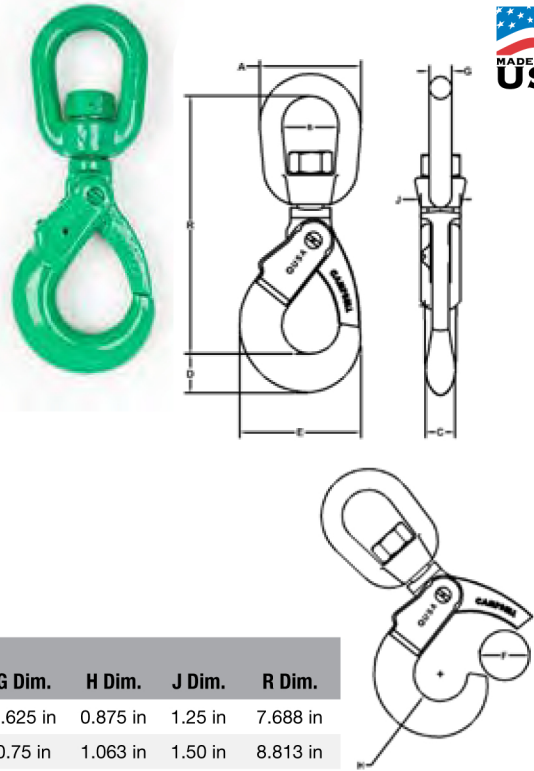


Chain Size	Catalog No.	UPC No. 020418	Working Load Limit 4 to 1	For Wire Rope Size	Working Load Limit 5 to 1	Weight Each
9/32 in	5798495	226830	4300 lb	7/16 in	3800 lb	3.35 lb
3/8 in	5798695	226847	8800 lb	1/2 in	7000 lb	5.80 lb
1/2 in	5798895	226878	15000 lb	5/8 in	12000 lb	12.95 lb
5/8 in	5799095	226861	22600 lb	7/8 in	18000 lb	21.00 lb

Chain Size	Catalog No.	A Dim.	B Dim.	C Dim.	D Dim.	E Dim.	F Dim.	G Dim.	H Dim.	J Dim.	R Dim.
9/32 in	5798495	3.00 in	1.75 in	0.938 in	1.02 in	3.594 in	1.625 in	0.625 in	0.875 in	1.25 in	7.688 in
3/8 in	5798695	3.50 in	2.00 in	1.125 in	1.25 in	4.312 in	1.875 in	0.75 in	1.063 in	1.50 in	8.813 in
1/2 in	5798895	4.50 in	2.50 in	1.312 in	1.796 in	5.404 in	2.25 in	1.00 in	1.281 in	1.75 in	11.25 in
5/8 in	5799095	5.625 in	3.50 in	1.50 in	2.169 in	6.50 in	2.375 in	1.25 in	1.50 in	2.00 in	13.438 in

Cam-Alloy Oblong Master Links

- For Use with Grade 80/100 Chain Slings, Wire Rope and Synthetic Assemblies
- 5 to 1 Design Factor
- Meet or Exceed All Requirements of ASME B30.26
- 100% Proof Tested in Accordance with ASTM A952
- Hallmarked with "USA", Date Code, Link No. and Material Diameter
- Made in the USA
- DO NOT EXCEED THE WORKING LOAD LIMIT

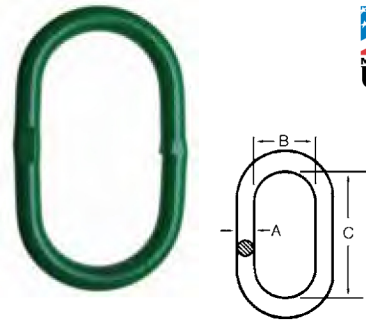

Link No.	Cat. No.	Material Diameter (A)	Inside Width (B)	Inside Length (C)	Working Load Limit 5 to 1	Used with Single Type S & C	Used with Double Type D	Used with Triple or Quad Type T or Q
CO-0	5685615	13/32 in	1.50 in	3.00 in	4200 lb	7/32 in	7/32 in	-
CO-1	5683215	5/8 in	2.50 in	5.00 in	8600 lb	9/32 in	9/32 in	7/32 in
CO-2	5683315	13/16 in	3.00 in	6.00 in	17600 lb	3/8 in	3/8 in	9/32 in
CO-3	5683415	1-1/8 in	4.00 in	8.00 in	30000 lb	1/2 in or 5/8 in	1/2 in	3/8 in
CO-4	5683515	1-1/4 in	4.00 in	8.00 in	45200 lb	3/4 in	5/8 in	1/2 in
CO-5	5683615	1-5/8 in	5.25 in	10.50 in	70600 lb	7/8 in	3/4 in	5/8 in
CO-6	5683715	1-7/8 in	6.00 in	12.00 in	105900 lb	1 in	7/8 in	3/4 in
CO-7	5687015	2 in	7.00 in	14.00 in	102600 lb	1-1/4 in or 1-1/2 in	1 in	-
CO-8	5687215	2-1/4 in	8.00 in	16.00 in	144600 lb	-	1-1/4 in or 1-1/2 in	7/8 in or 1 in