




Cam-Alloy Wide Oblong Master Links


- Wider Than Standard Master Links
- Usable with Quik-Alloy® Coupling Links for Double Leg Slings
- Wider Link Accommodates Heavy Wire Rope Thimbles in Multiple Leg Slings
- Grade 100 Chain Strength
- 5 to 1 Design Factor
- Meet or Exceed All Requirements of ASME B30.26
- 100% Proof Tested in Accordance with ASTM A952
- Hallmarked with “USA”, Date Code, Link No. and Material Diameter
- Made in the USA
- DO NOT EXCEED THE WORKING LOAD LIMIT

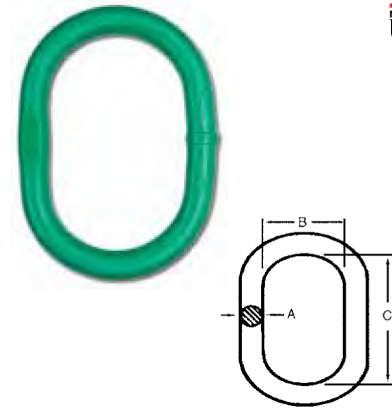

Link No.	Catalog No.	Material Dia. (A)	Inside Width (B)	Inside Length (C)	Working Load Limit 5 to 1	Shelf Pack
CW-2	5683315VW	7/8 in	4.00 in	6.50 in	17600 lb	1
CW-3	5683415VW	1-1/8 in	4.25 in	7.50 in	30000 lb	1
CW-4	5683515VW	1-3/8 in	5.50 in	9.50 in	45200 lb	1
CW-5	5683615VW	1-5/8 in	5.875 in	10.50 in	70600 lb	1

Cam-Alloy Oblong, Master Link Sub-Assemblies

- For Construction of Triple, Quad and Double Basket Slings
- 5 to 1 Design Factor
- Meet or Exceed All Requirements of ASME B30.26
- 100% Proof Tested in Accordance with ASTM A952
- Master Link Hallmarked with “USA”, Date Code, Link No. and Material Diameter
- Made in the USA
- DO NOT EXCEED THE WORKING LOAD LIMIT

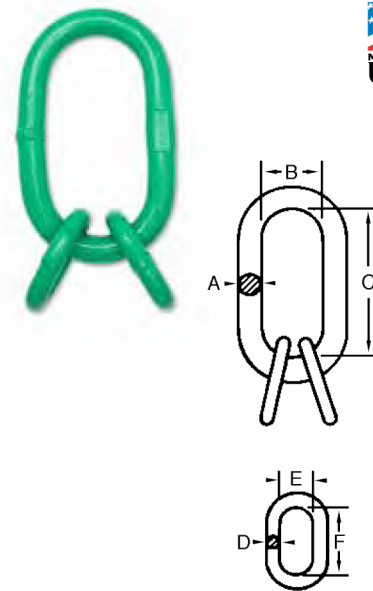

Chain Size	Catalog No.	UPC No. 020418	Working Load Limit 5 to 1	Weight Each	Oblong Master Link Material Dia. (A)	Oblong Master Link Inside Width (B)
9/32 in	5682215	182501	12900 lb	4.40 lb	13/16 in	3 in
3/8 in	5682315	182846	26400 lb	9.50 lb	1-1/8 in	4 in
1/2 in	5682415	182518	45000 lb	16.00 lb	1-1/4 in	4 in
5/8 in	5682515	182525	67800 lb	31.75 lb	1-5/8 in	5-1/4 in
3/4 in	5682615	182532	105900 lb	50.00 lb	1-7/8 in	6 in
7/8 in	5682715	167409	128100 lb	85.00 lb	2-1/4 in	8 in

Chain Size	Catalog No.	Oblong Master Link Inside Length (C)	Master Coupling Link Material Dia. (D)	Master Coupling Link Inside Width (E)	Master Coupling Link Inside Length (F)
9/32 in	5682215	6 in	17/32 in	1-1/2 in	2-3/4 in
3/8 in	5682315	8 in	25/32 in	1-9/16 in	2-7/8 in
1/2 in	5682415	8 in	1 in	3 in	5 in
5/8 in	5682515	10-1/2 in	1-1/4 in	4 in	6 in
3/4 in	5682615	12 in	1-1/2 in	4 in	6 in
7/8 in	5682715	16 in	1-3/4 in	4 in	6 in