




## GX Clamps

- Features Drop-Forged and Heat Treated Body and Components
- Can Be Used for Both Vertical and Horizontal to Vertical Lifting Through 180°
- Exclusive Feature is a Patented Wear Indicator System. When Any of the Cam'S Straight Line, Convex Teeth Are Flattened Between Unique Wear Indicator Grooves, It is Time to Change the Cam.
- Note: The Pad and Cam Should Be Replaced at the Same Time
- Clamps Are 100% Proof Tested and Certificate of Test Supplied with Each Clamp
- Minimum WLL of at Least 10% of the Maximum WLL

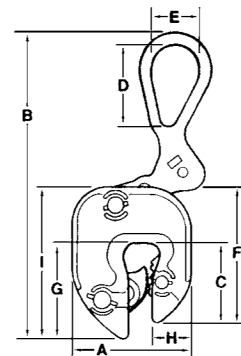

Catalog No.	UPC No. 020418	Grip Range	Working Load Limit (Metric Tons)	Weight Each
6423000	172199	1/16 to 5/8 in.	1/2 t	4.00 lb
6423920	175657	5/8 to 1-1/8 in.	1/2 t	5.00 lb
6423005	172205	1/16 to 3/4 in.	1 t	8.00 lb
6423923	175664	3/4 to 1-3/8 in.	1 t	9.00 lb
6423010	172229	1/16 to 1 in.	3 t	17.00 lb
6423925	175671	1 to 1-3/4 in.	3 t	20.00 lb
6423015	177583	1/2 to 2 in.	5 t	40.00 lb

Catalog No.	Grip Range	A Dim.	B Dim.	C Dim.	D Dim.	E Dim.	F Dim.	G Dim.	H Dim.	I Dim.
6423000	1/16 to 5/8 in.	4 in	9-1/2 in	2-3/16 in	2-3/4 in	2 in	4-1/8 in	2-7/8 in	1-3/8 in	4-7/8 in
6423920	5/8 to 1-1/8 in.	5 in	9-1/2 in	2-3/16 in	2-5/8 in	2 in	4-1/8 in	2-7/8 in	1-5/8 in	4-7/8 in
6423005	1/16 to 3/4 in.	4-3/4 in	11-1/4 in	3-1/16 in	3-1/16 in	2-1/16 in	5-1/4 in	3-5/8 in	1-5/8 in	5-7/8 in
6423923	3/4 to 1-3/8 in.	5-7/8 in	11-1/4 in	3-1/16 in	3-1/16 in	2-1/16 in	5-1/4 in	3-5/8 in	1-5/8 in	5-7/8 in
6423010	1/16 to 1 in.	6 in	14 in	3-9/16 in	3-13/16 in	3 in	6-3/4 in	4-7/16 in	2 in	7-5/8 in
6423925	1 to 1-3/4 in.	7-1/4 in	14 in	3-9/16 in	3-13/16 in	3 in	6-3/4 in	4-7/16 in	2-1/4 in	7-5/8 in
6423015	1/2 to 2 in.	8-7/8 in	20 in	4-11/16 in	5 in	3-15/16 in	8-3/4 in	5-15/16 in	3-13/16 in	9-15/16 in