




Short Leg Structural “GX” Clamps

- Designed for a Secure Bite on Small or Odd Shaped, Wide Flanged Beams
- Can Be Used for Both Vertical and Horizontal to Vertical Lifting Through 180°
- Put Short Leg Under Plate When Lifting From Horizontal to Vertical
- Replacement Parts Are Same As for Standard “GX” Clamps
- Note: The Pad and Cam Should Be Replaced at the Same Time
- Clamps Are 100% Proof Tested and Certificate of Test Supplied with Each Clamp
- Minimum WLL of at Least 10% of the Maximum WLL

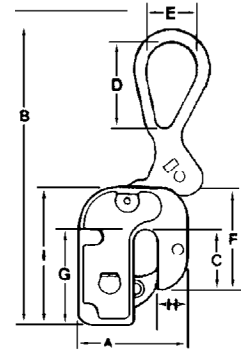

| Catalog No. | UPC No. 020418 | Grip Range | Working Load Limit (Metric Tons) | Weight Each |
|-------------|----------------|-----------------|----------------------------------|-------------|
| 6423100 | 177330 | 1/16 to 5/8 in. | 1/2 t | 4.25 lb |
| 6423105 | 177347 | 1/16 to 3/4 in. | 1 t | 8.00 lb |
| 6423108 | 183041 | 1/16 to 7/8 in. | 2 t | 10.00 lb |
| 6423110 | 177354 | 1/16 to 1 in. | 3 t | 18.00 lb |

| Catalog No. | Grip Range | A Dim. | B Dim. | C Dim. | D Dim. | E Dim. | F Dim. | G Dim. | H Dim. | I Dim. |
|-------------|-----------------|----------|------------|-----------|------------|-----------|-----------|-----------|------------|------------|
| 6423100 | 1/16 to 5/8 in. | 4 in | 9-1/2 in | 2-1/8 in | 2-5/8 in | 2 in | 4-1/16 in | 2-7/8 in | 1-3/8 in | 4-3/4 in |
| 6423105 | 1/16 to 3/4 in. | 4-3/4 in | 11-5/16 in | 2-5/8 in | 3-1/16 in | 2-1/16 in | 4-7/8 in | 3-9/16 in | 1-21/32 in | 5-13/16 in |
| 6423108 | 1/16 to 7/8 in. | 5-1/8 in | 12-1/8 in | 2-5/8 in | 3-5/16 in | 2-1/4 in | 5 in | 3-9/16 in | 1-5/8 in | 5-15/16 in |
| 6423110 | 1/16 to 1 in. | 6 in | 15-1/16 in | 3-7/16 in | 3-13/16 in | 3 in | 6-9/16 in | 4-3/16 in | 2 in | 7-5/16 in |

Repair Kits for “GX” Clamps

- Replacement Part Kits for All “GX” Style Clamps
- Kits Contain All Necessary Parts for Shackle or Cam/Pad Replacement
- Shackle Kit Includes: 1 Shackle, 1 Radius Link, 1 T-Spring, 2 Connecting Links, 1 Radius Link Pin, 3 Linkage Rivets, 4 Sel-Locs
- Note: Shackle Kit is Supplied Pre-Assembled for Easier Installation
- Cam/Pad Kit Includes: 1 Cam, 1 Pad, 1 Cam Pin, 1 Pad Pin, 1 T-Spring, 1 Rivet, 4 Sel-Locs
- Note: The Cam and Pad Should Be Replaced at the Same Time



| Catalog No. | UPC No. 020418 | Part Name | For Use With Clamp Capacity | Weight Each |
|-------------|----------------|-------------|-----------------------------|-------------|
| 6506000 | 210013 | Shackle Kit | 1/2 TON | 1.00 lb |
| 6506001 | 210020 | Cam/Pad Kit | 1/2 TON | 0.50 lb |
| 6506010 | 210037 | Shackle Kit | 1 TON | 1.00 lb |
| 6506011 | 210044 | Cam/Pad Kit | 1 TON | 0.80 lb |
| 6506020 | 210051 | Shackle Kit | 2 TON | 1.00 lb |
| 6506021 | 210068 | Cam/Pad Kit | 2 TON | 1.50 lb |
| 6506030 | 210075 | Shackle Kit | 3 TON | 6.00 lb |
| 6506031 | 210082 | Cam/Pad Kit | 3 TON | 4.00 lb |
| 6506050 | 210099 | Shackle Kit | 5 TON | 15.00 lb |
| 6506051 | 210105 | Cam/Pad Kit | 5 TON | 4.50 lb |

