

# 3600 Series




Hager 3600 Series Grade 2 tubular lockset provides the necessary security and dependability of a commercial lock with a more residential look. It is well suited for medium duty commercial or heavy duty residential applications such as multi-family housing.



**FOR ANY HAGER PURCHASE CONTACT INDUSTRIAL HARDWARE & SPECIALTIES INC.  
CALL 1800-684-4010**



**3600 SERIES - HOW TO ORDER**

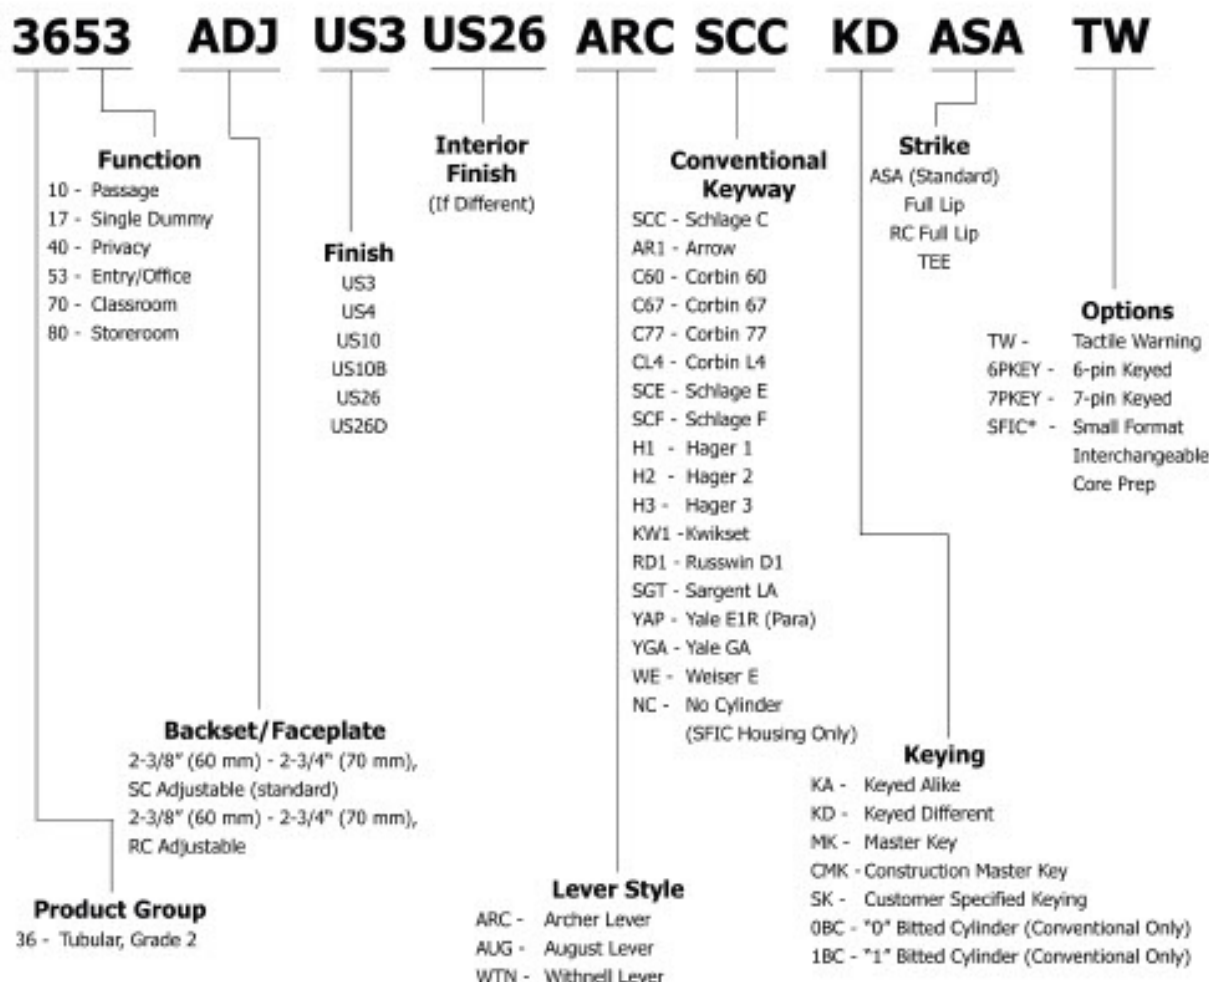

**Notes:**







1. If masterkeyed, include completed master key form with order (available on page 88 or [www.hagerco.com](http://www.hagerco.com)).
2. For additional keying information, please refer to cylinder, core, and keying section of catalog (page 73).

\* Small format interchangeable core sold separately. Available in Best Keyways (A Standard) or Hager Keyways (optional).

**Ordering example: 3653 ADJ 2-3/8" to 2-3/4" US26D WTN NC ASA SFIC**

**FOR ANY HAGER PURCHASE CONTACT INDUSTRIAL HARDWARE & SPECIALTIES INC.  
CALL 1800-684-4010**

## 3600 SERIES - FUNCTION CHART


Function	Function No.	Function Description	ANSI No.	
<b>Non-Keyed</b>				
	Passage	10	Latchbolt operated by lever from either side at all times.	F75
	Dummy - Single	17	Pull one side, no mechanical operation.	-
	Privacy	40	Latchbolt operated by lever from either side. Outside lever is locked by push button inside and unlocked by emergency release outside or operating inside lever.	F76B
<b>Keyed</b>				
	Entry/Office	53	Deadlocking latchbolt operated by lever from either side except when outside lever is locked by push button on inside. When outside lever is locked, operating key in outside lever unlocks locking device. Locking device shall automatically release when inside lever is operated. Closing door does not release push button.	F82A
	Classroom	70	Deadlocking latchbolt operated by lever from either side except when outside lever is locked from outside by key. When outside lever is locked, latchbolt is operated by inside lever.	F84
	Storeroom	80	Deadlocking latchbolt operated by key in outside lever, or by operating inside lever. Outside lever is always locked. Inside lever is always unlocked.	F86

FOR ANY HAGER PURCHASE CONTACT INDUSTRIAL HARDWARE & SPECIALTIES INC.  
CALL 1800-684-4010




**3600 SERIES - LEVER OPTIONS**


**ARCHER LEVER**

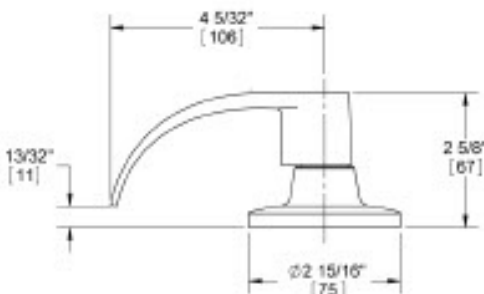

**AUGUST LEVER**

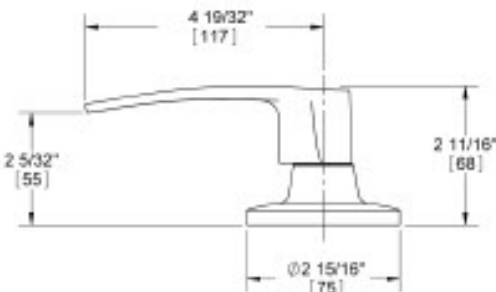

**WITHNELL LEVER**

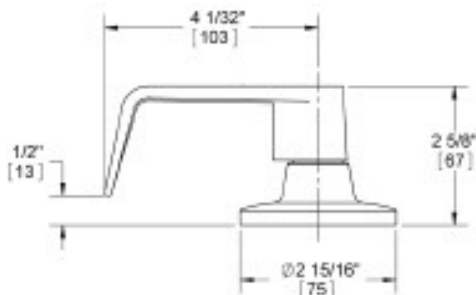

Notes: Optional tactile warning available on all lever styles (only outside lever will include raised surfaces unless otherwise specified).

**FOR ANY HAGER PURCHASE CONTACT INDUSTRIAL HARDWARE & SPECIALTIES INC.  
CALL 1800-684-4010**



## 3600 SERIES - GRADE 2 TUBULAR

<b>WARRANTY</b>	Five-year warranty
<b>FEATURES</b>	<ul style="list-style-type: none"> <li>• Heavy duty residential - medium duty commercial</li> <li>• No exposed mounting screws</li> <li>• Non-handed</li> <li>• Conventional cylinder or Small Format Interchangeable Core option available</li> </ul>
Certifications:	<ul style="list-style-type: none"> <li>• BHMA Certified ANSI A156.2 Series 4000 Grade 2</li> <li>• ADA Compliant ANSI A117.1 Accessibility Code</li> <li>• UL/cUL Listed for all functions up to 3 hours for "A" label single doors</li> <li>• UL10C Positive Pressure Rated</li> <li>• UL10B Neutral Pressure Rated</li> </ul>
Lever Options:	Archer, August, Withnell levers
Options:	<ul style="list-style-type: none"> <li>• Tactile warning</li> <li>• Split finish</li> </ul>
<b>SPECIFICATIONS</b>	
Standard Door Prep:	<ul style="list-style-type: none"> <li>• 2-1/8" (54 mm) diameter (bore)</li> <li>• Latch hole: 1" (25 mm) diameter (cross bore)</li> </ul>
Exposed Trim:	<ul style="list-style-type: none"> <li>• Levers: Cast zinc</li> <li>• Rose: Wrought brass</li> </ul>
Rose Diameter:	2-15/16" (75 mm)
Lock Chassis:	Heavy gauge steel, zinc dichromated
Keys:	Two operating keys supplied per lock
Cylinders/Cores:	<ul style="list-style-type: none"> <li>• Brass - keyed different - Schlage C Keyway - Standard</li> <li>• Cylinder drilled 6-pin, keyed 5-pin - Standard</li> <li>• Other keying options, including keyed 6-pin, available from factory (see cylinder, core and keying section)</li> <li>• Zero bit cylinders will be 6 pin keyed - standard</li> <li>• Small Format Interchangeable Core option available</li> <li>• SFIC uncombined or combined, brass 6- or 7-pin cores sold separately</li> </ul>
Door Thickness:	1-3/8" - 1-3/4" (35 mm - 45 mm)
Backset:	<ul style="list-style-type: none"> <li>• Adjustable 2-3/8" - 2-3/4" (60 mm - 70 mm)</li> <li>• Preset at factory for 2-3/8" (60 mm)</li> </ul>
Latchbolt:	<ul style="list-style-type: none"> <li>• 1/2" (13 mm) throw, stainless steel</li> <li>• 1" x 2-1/4" (25 mm x 57 mm) faceplate</li> <li>• Square corner faceplate standard, round corner available</li> <li>• Deadlocking latchbolt prevents manipulation when door is closed; keyed functions only</li> </ul>
Strike:	3935 ASA 1-1/4" x 4-7/8" (32 mm x 124 mm) strike - Standard
Functions:	10 Passage, 17 Dummy, 40 Privacy, 53 Entry, 70 Classroom, 80 Storeroom
<b>FINISHES</b>	US3, US4, US10, US10B, US26, US26D



FOR ANY HAGER PURCHASE CONTACT INDUSTRIAL HARDWARE & SPECIALTIES INC.  
CALL 1800-684-4010



## 3600 SERIES LATCHBOLTS

### Adjustable Backset Spring Latches



- 3951**  
2-3/8" (60 mm) - 2-3/4" (70 mm)  
**Adjustable Backset  
Spring Latch - Standard**
- Square corner
  - 1" x 2-1/4" (25 mm x 57 mm) faceplate
  - For use with Passage/Privacy functions



- 3953**  
2-3/8" (60 mm) - 2-3/4" (70 mm)  
**Adjustable Backset  
Spring Latch**
- Round corner
  - 1" x 2-1/4" (25 mm x 57 mm) faceplate
  - For use with Passage/Privacy functions

### 5" Backset Spring Latches



- 3939**  
5" (127 mm) **Backset  
Spring Latch**
- Square and round corner available
  - 1" x 2-1/4" (25 mm x 57 mm) faceplate
  - For use with Passage/Privacy functions

### Adjustable Backset Dead Latches



- 3952**  
2-3/8" (60 mm) - 2-3/4" (70 mm)  
**Adjustable Backset  
Dead Latch - Standard**
- Square corner
  - 1" x 2-1/4" (25 mm x 57 mm) faceplate
  - For use with all keyed functions



- 3954**  
2-3/8" (60 mm) - 2-3/4" (70 mm)  
**Adjustable Backset  
Dead Latch**
- Round corner
  - 1" x 2-1/4" (25 mm x 57 mm) faceplate
  - For use with all keyed functions

### 5" Backset Dead Latches



- 3938**  
5" (127 mm) **Backset  
Dead Latch**
- Square and round corner available
  - 1" x 2-1/4" (25 mm x 57 mm) faceplate
  - For use with all keyed functions

### Optional Drive-In Latchbolts



- 3914**  
2-3/8" (60 mm) - 2-3/4" (70 mm)  
**Adjustable Backset  
Spring Latch**
- For use with Passage/Privacy functions



- 3915**  
2-3/8" (60 mm) - 2-3/4" (70 mm)  
**Adjustable Backset  
Dead Latch**
- For use with all keyed functions

### 3600 SERIES STRIKES



- 3933**  
**T-Strike with Plastic Dust Box**
- 1-1/8" x 2-3/4" (29 mm x 70 mm)
  - Dust box included



- 3934**  
**Full Lip Strike**
- 1-5/8" x 2-1/4" (41 mm x 57 mm)



- 3935**  
**ASA Strike - Standard**
- 1-1/4" x 4-7/8" (32 mm x 124 mm)
  - 1-5/16" lip
  - Other lengths available upon request



- 3958**  
**Full Lip Strike with Round Corner**
- 1-5/8" x 2-1/4" (41 mm x 57 mm)
  - 1/4" radius



- 3959**  
**Faceplate Adapter**
- Converts 1" (25 mm) to 1-1/8" (28 mm) width
  - Supplied standard with 3600 Series