

Knife-Thread Flush Slotted

Diameter Thread Pitch

1/4-20



Suggested Drill Bit Size




0.3750 (3/8)

| ZONE | | REV. | REVISIONS | DATE | APPROVED |
|------|--|------|-------------|------|----------|
| | | | DESCRIPTION | | |
| | | | | | |

0.5

0.453

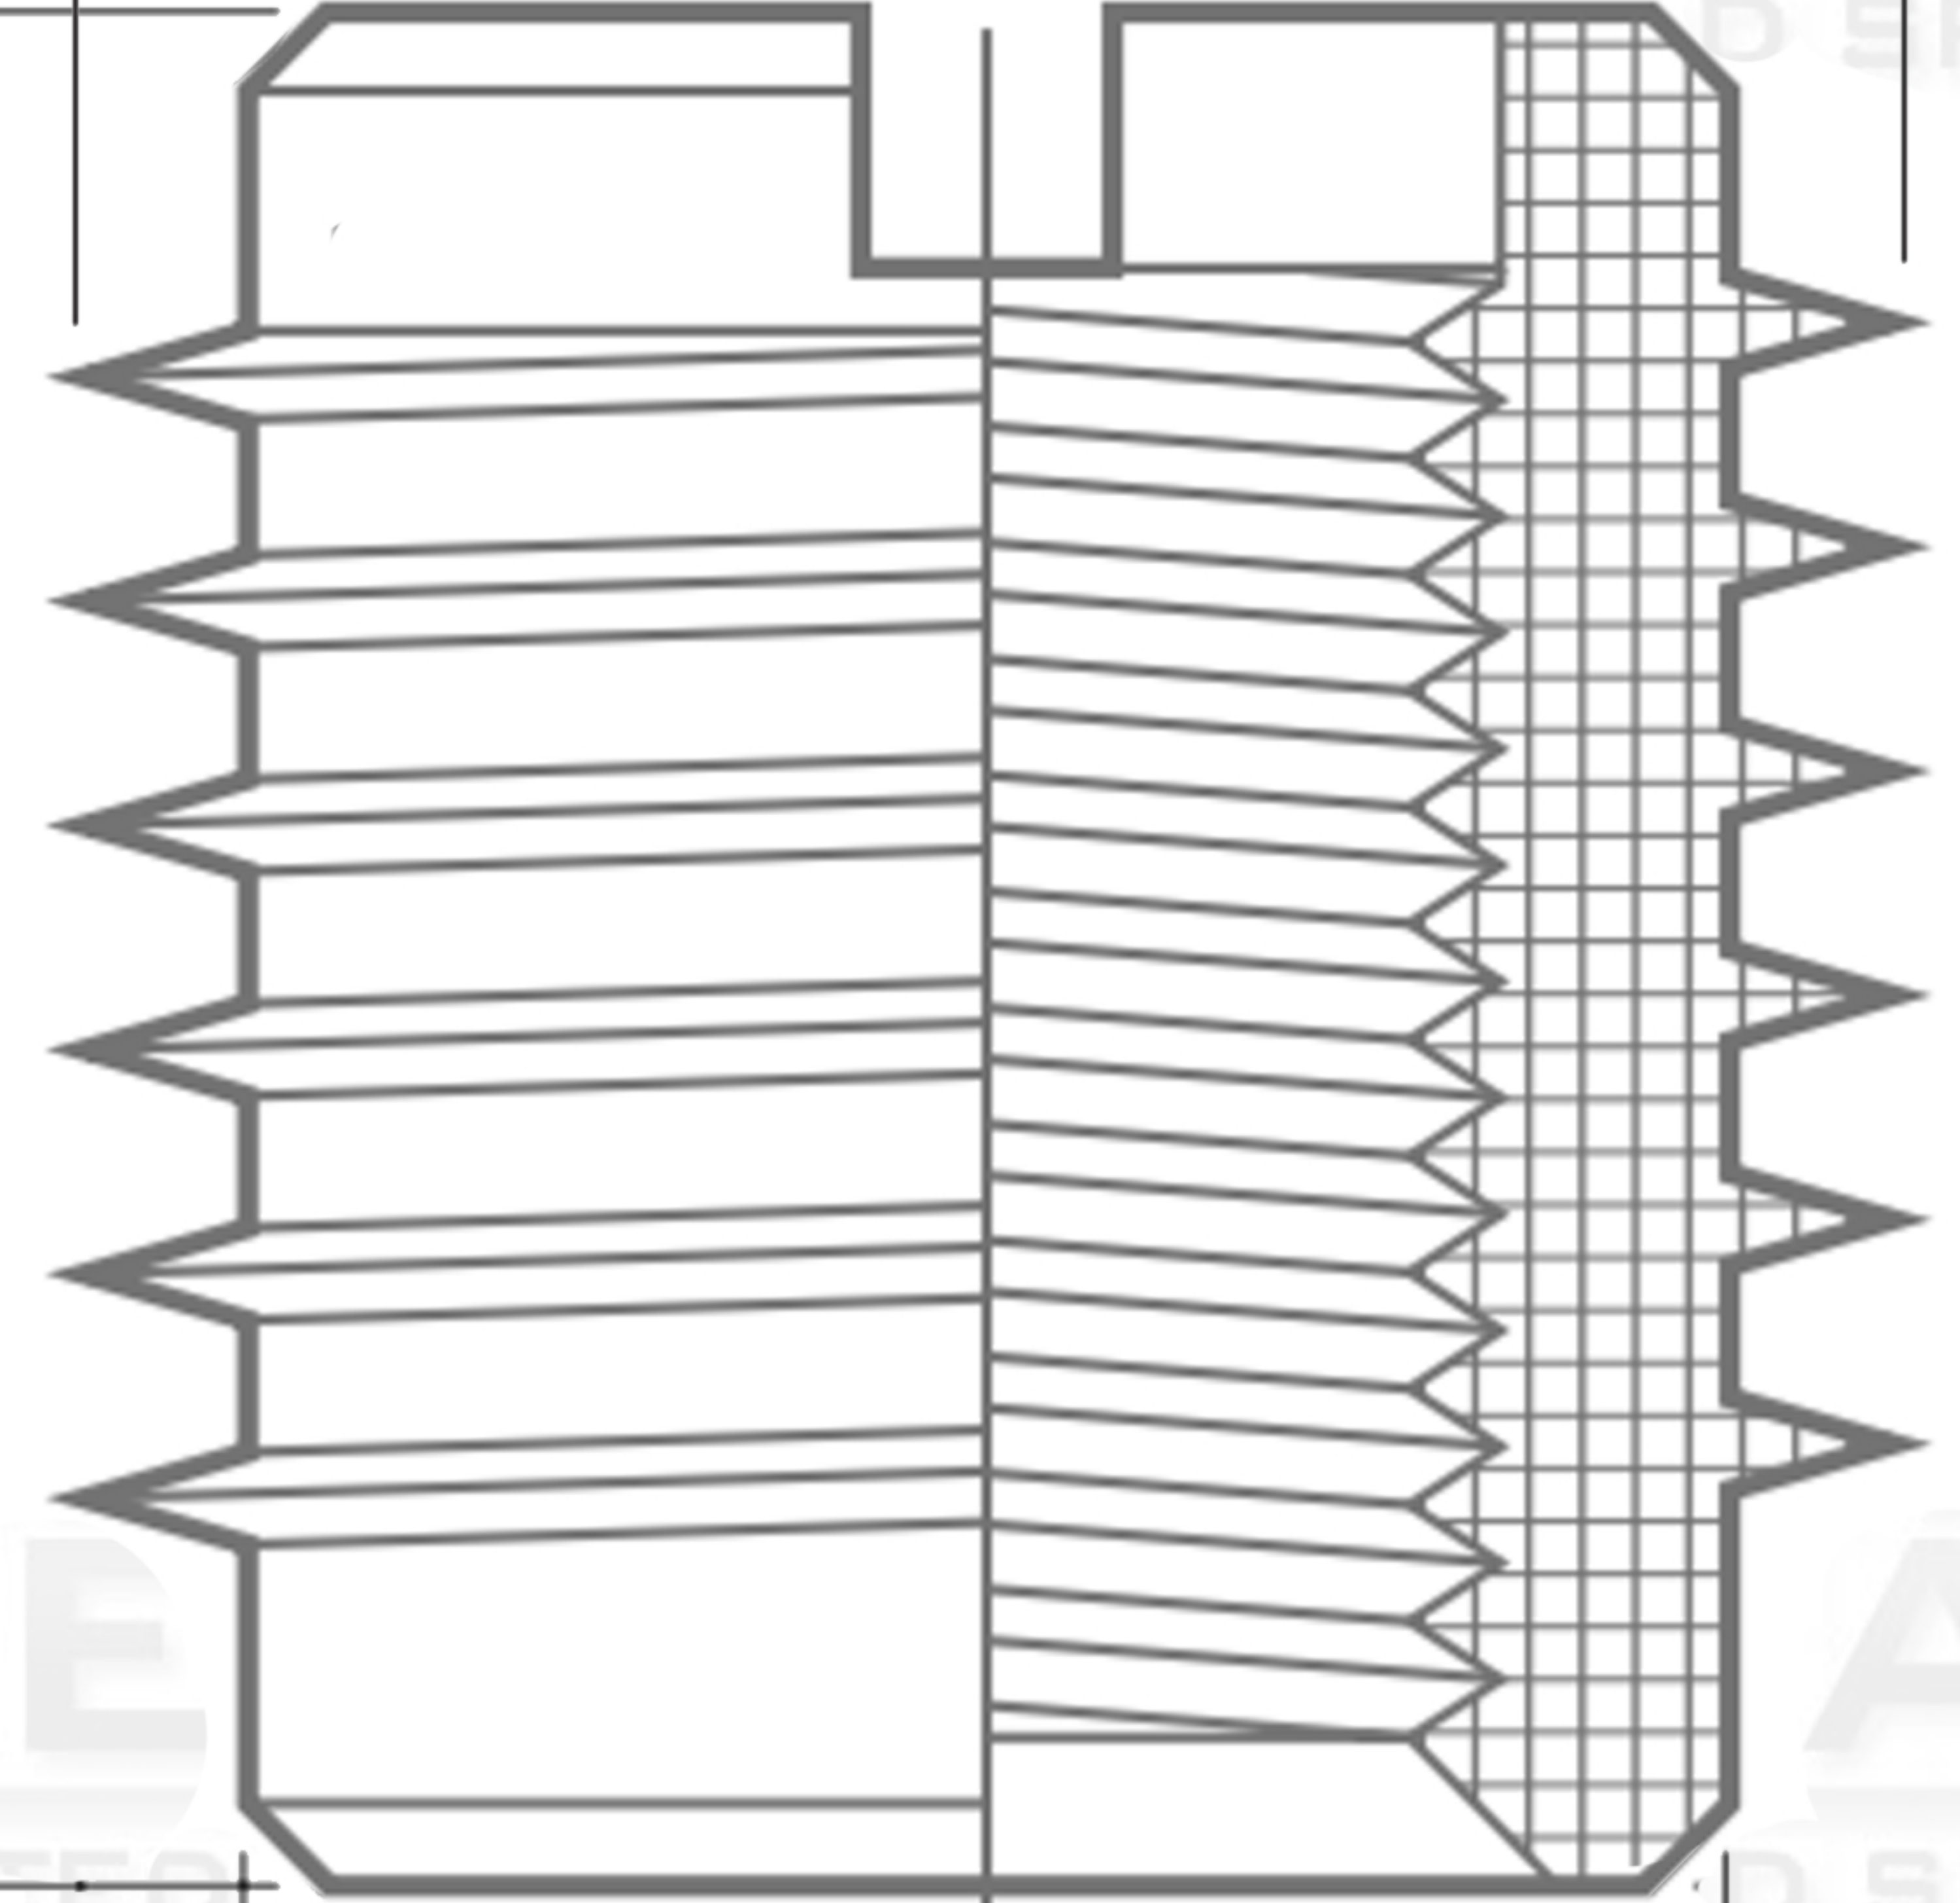

0.375

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

| | | | | | |
|-------------|---------|---|-----------|------|------|
| | | | | NAME | DATE |
| | | | DRAWN | | |
| | | | CHECKED | | |
| | | | ENG APPR. | | |
| | | | MFG APPR. | | |
| | | | Q.A. | | |
| | | | COMMENTS: | | |
| NEXT ASSY | USED ON | TH. STANDARD: ANSI/ASME ACRONYM: UNC ROTATION: Right-Hand MATERIAL FINISH Brass | | | |
| | | PART NUMBER 35L6C-NCJR-25-0T | | | |
| APPLICATION | | DO NOT SCALE DRAWING | | | |



**17-B KENTUCKY AVENUE
PATERSON, NEW JERSEY 07503
TEL: 973-684-4010 FAX: 973-684-3095
email: TechSupport@industrialhardware.com
www.industrialhardware.com**

| | | |
|------------------|----------|--------------|
| SIZE A | DWG. NO. | REV. |
| SCALE:1:8 | WEIGHT: | SHEET 1 OF 1 |