
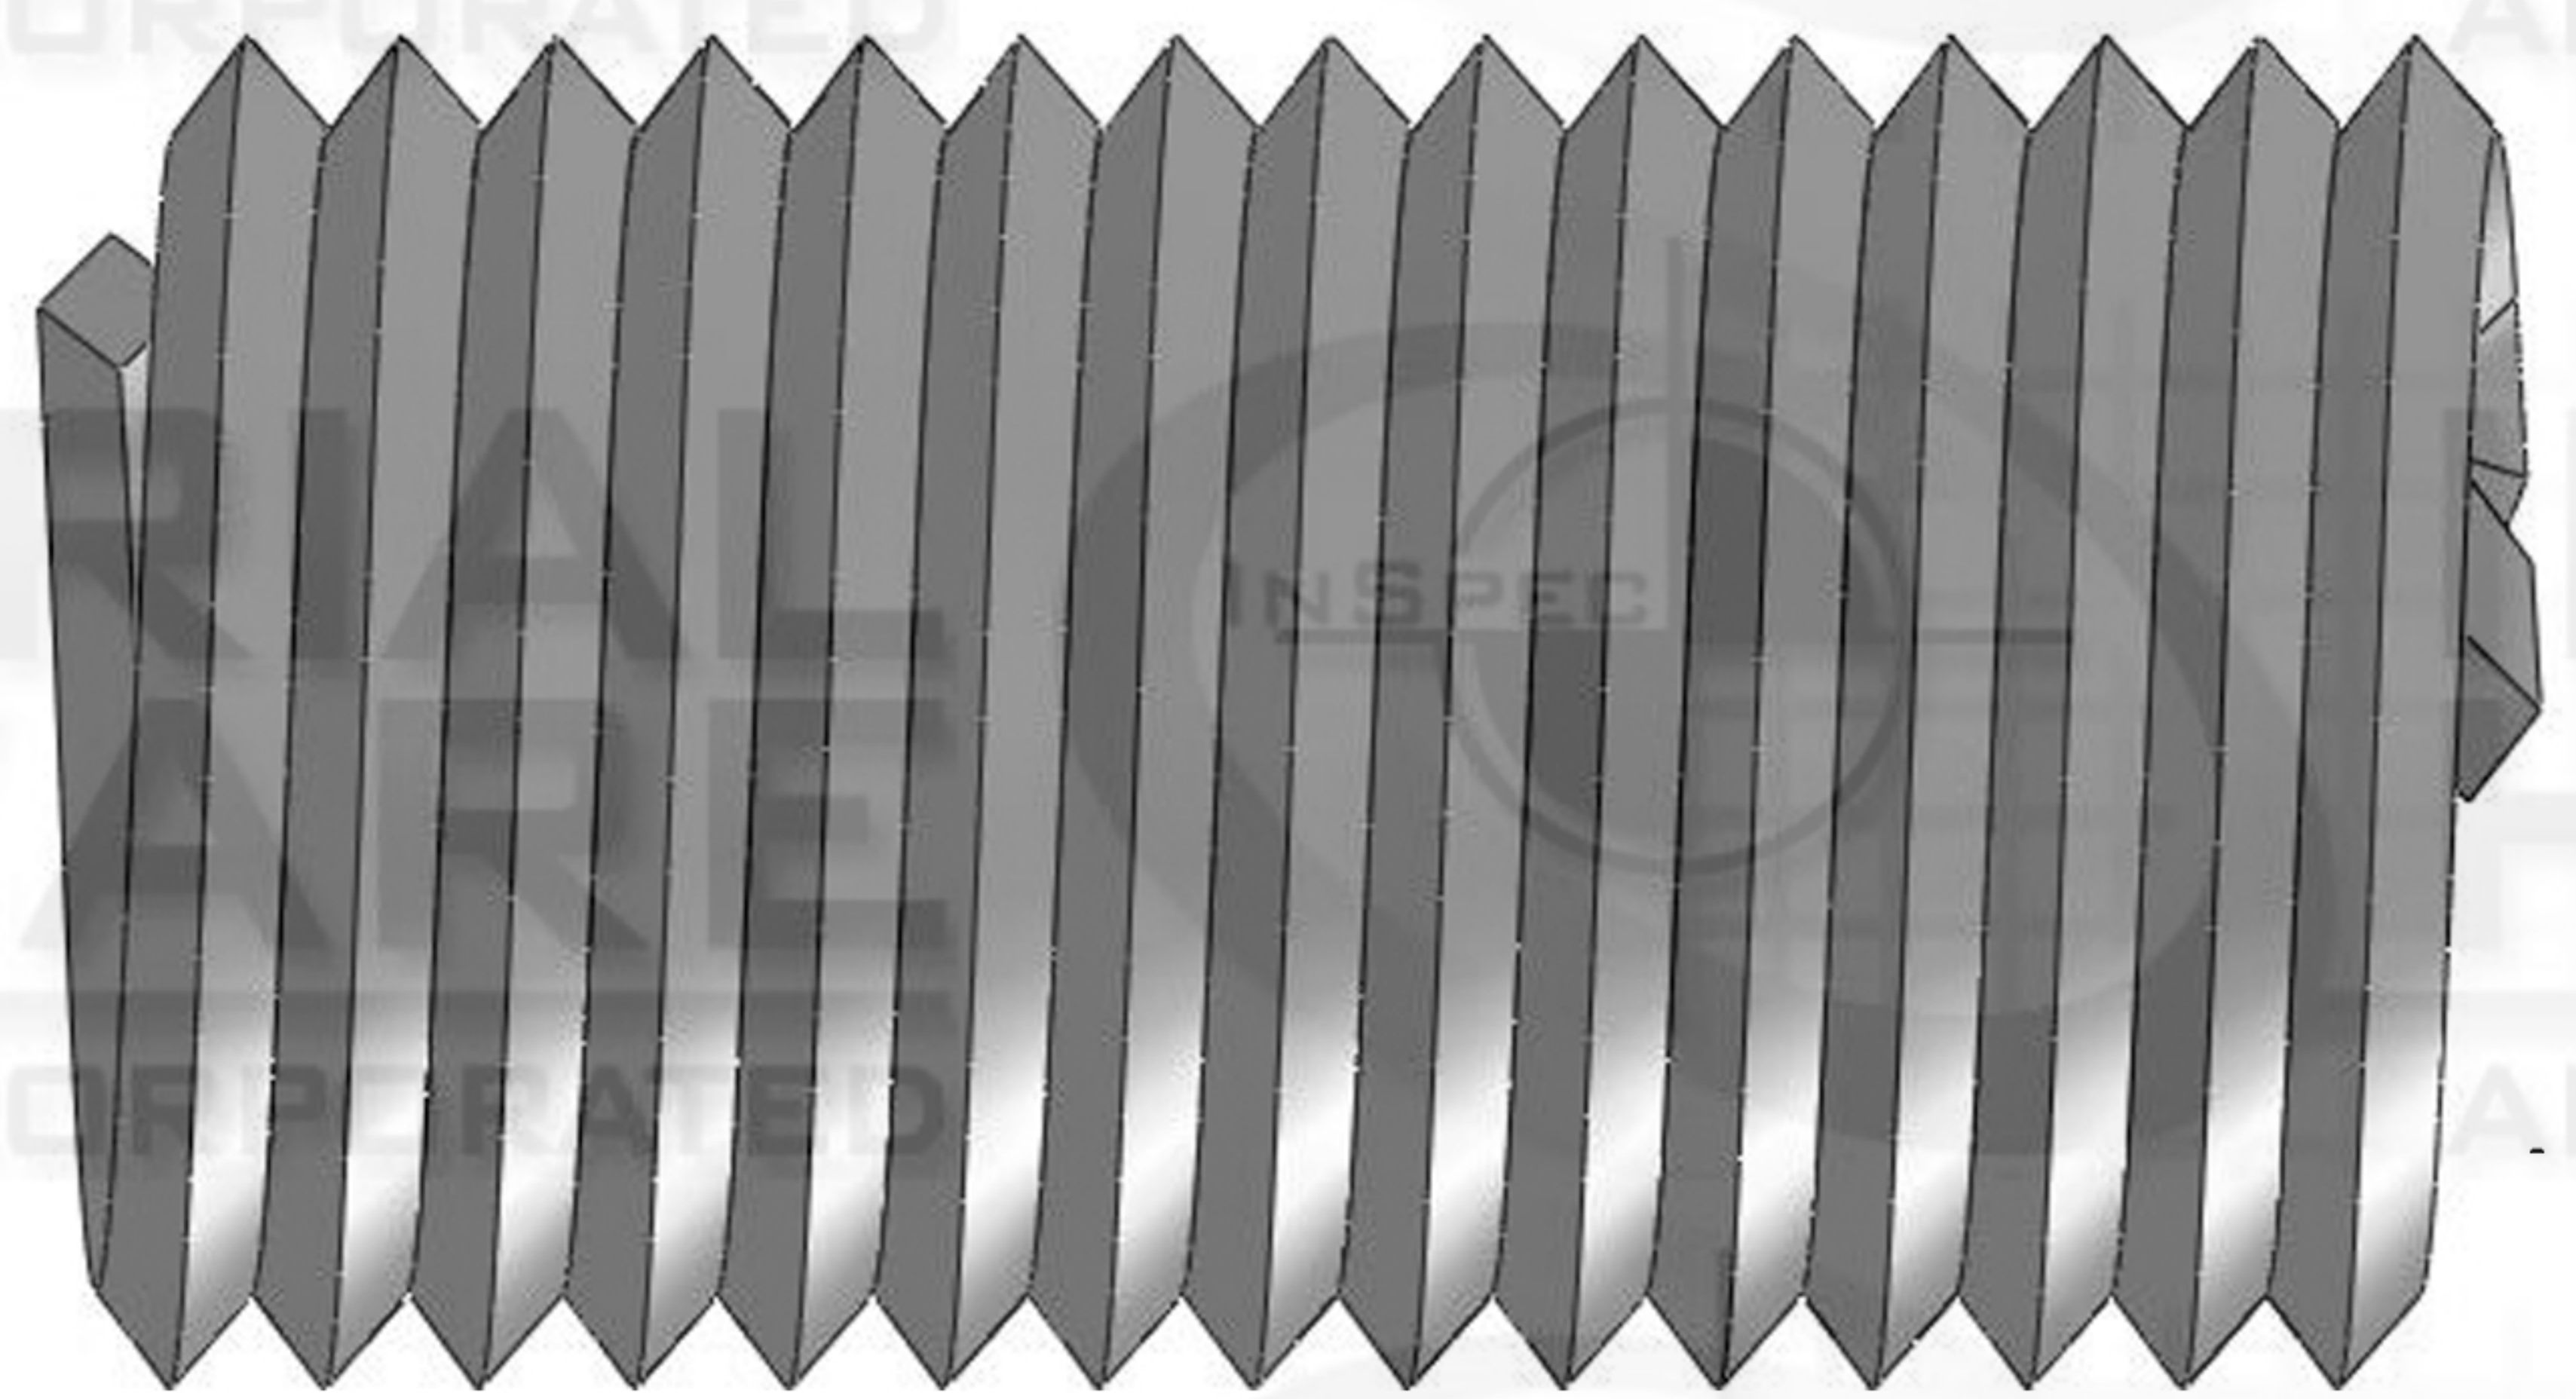
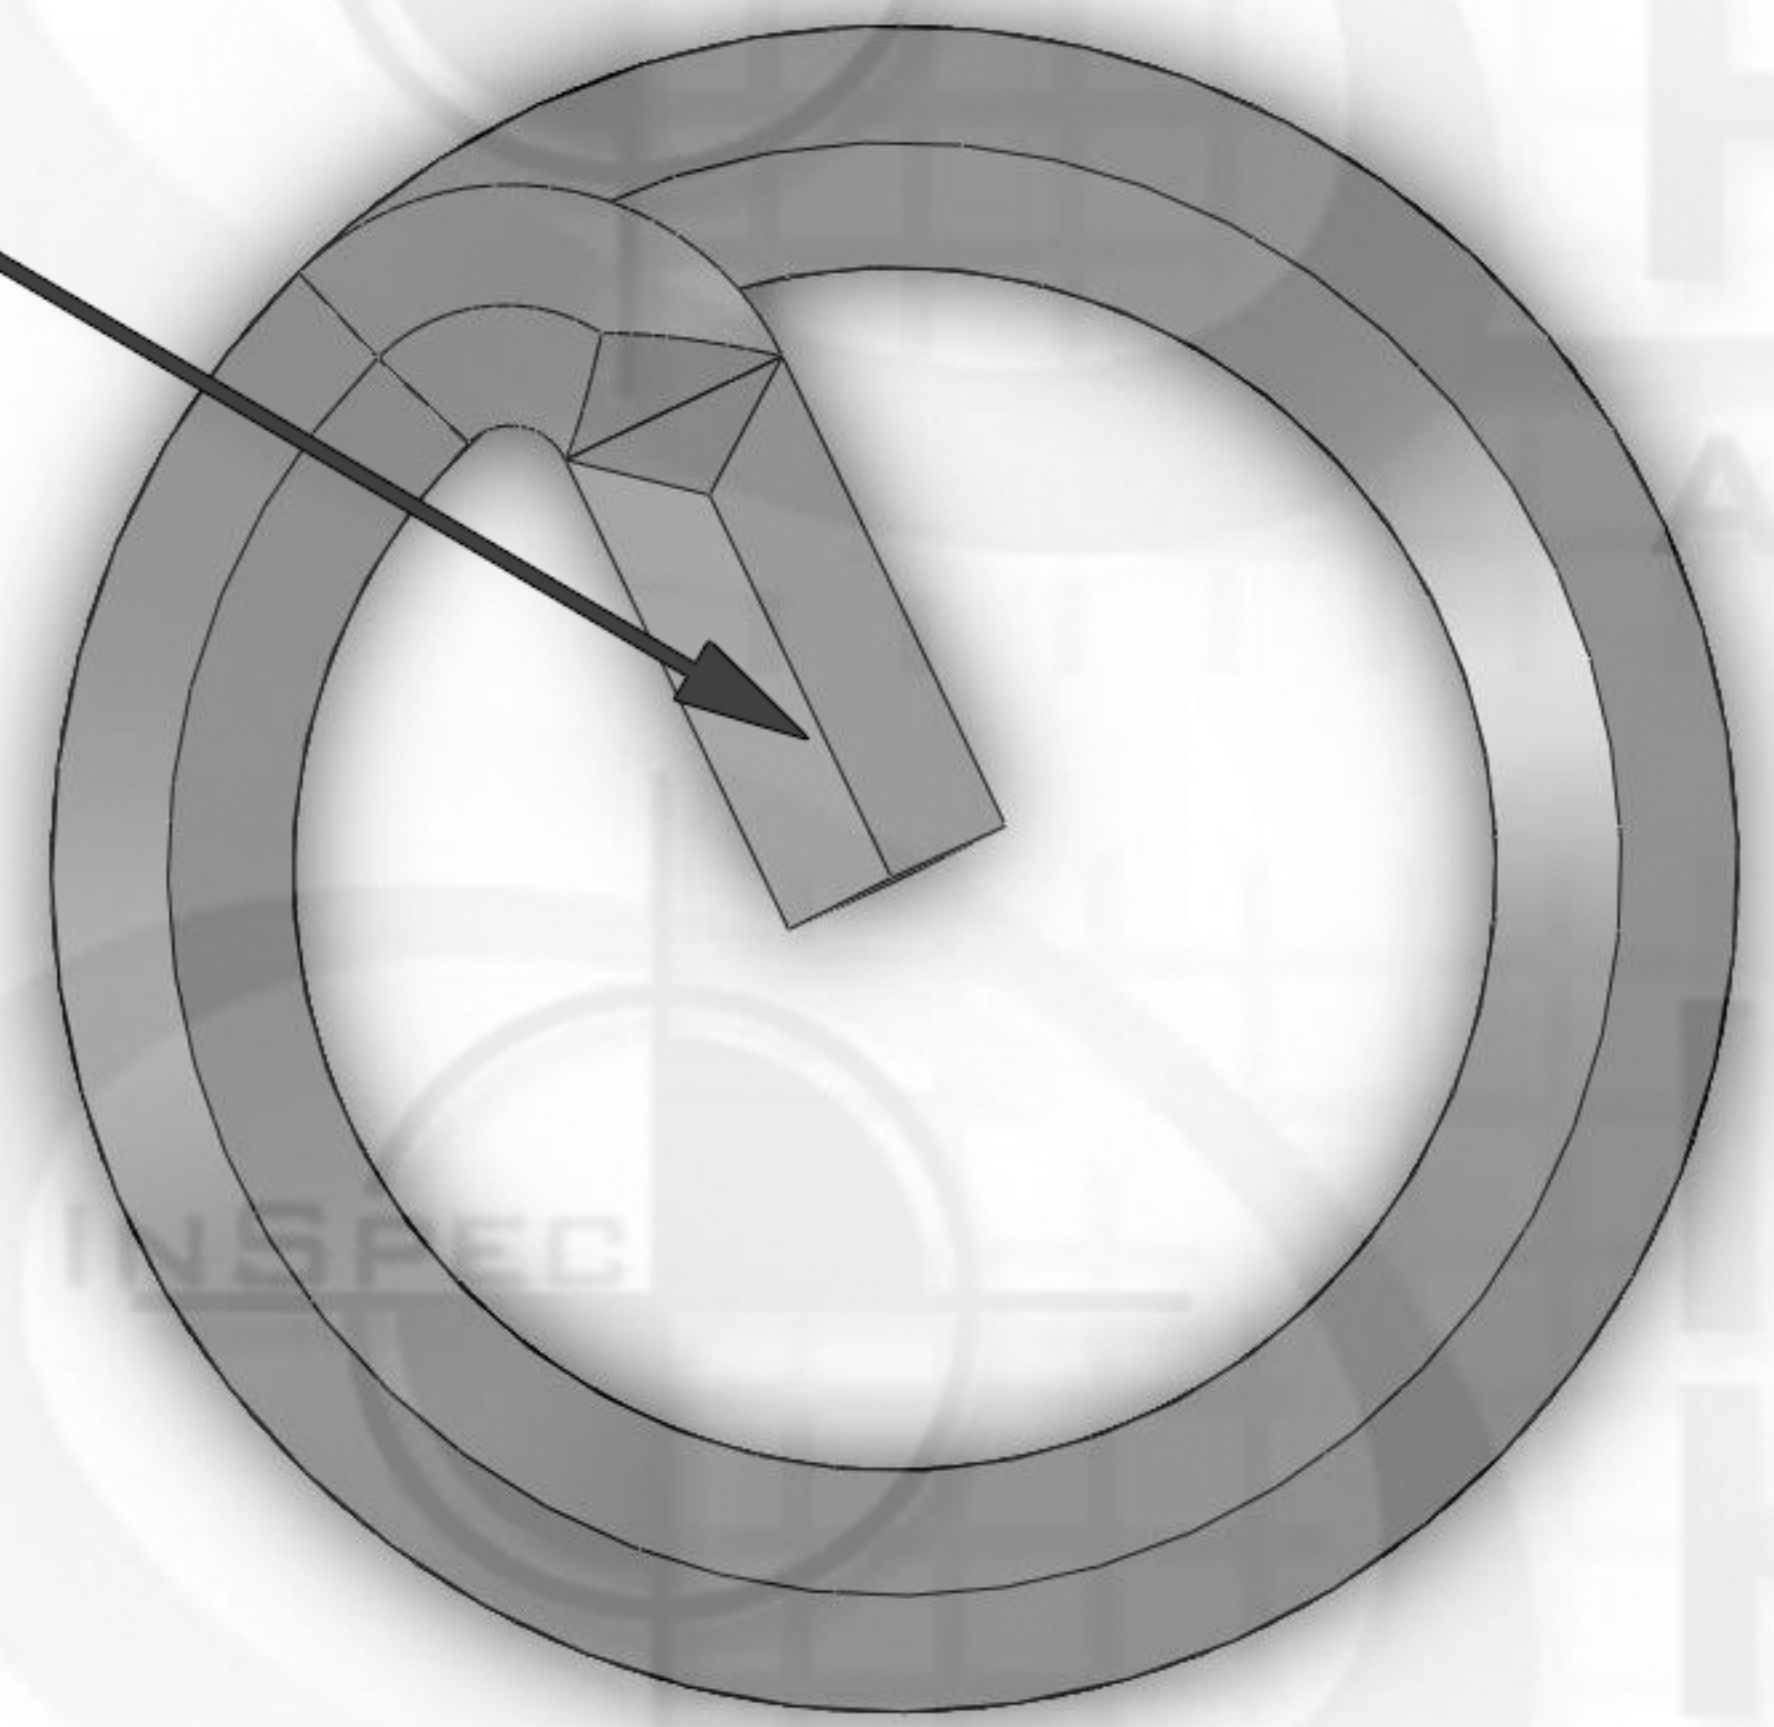


WireSert Locking

Diameter Thread Pitch

3-48

Tang

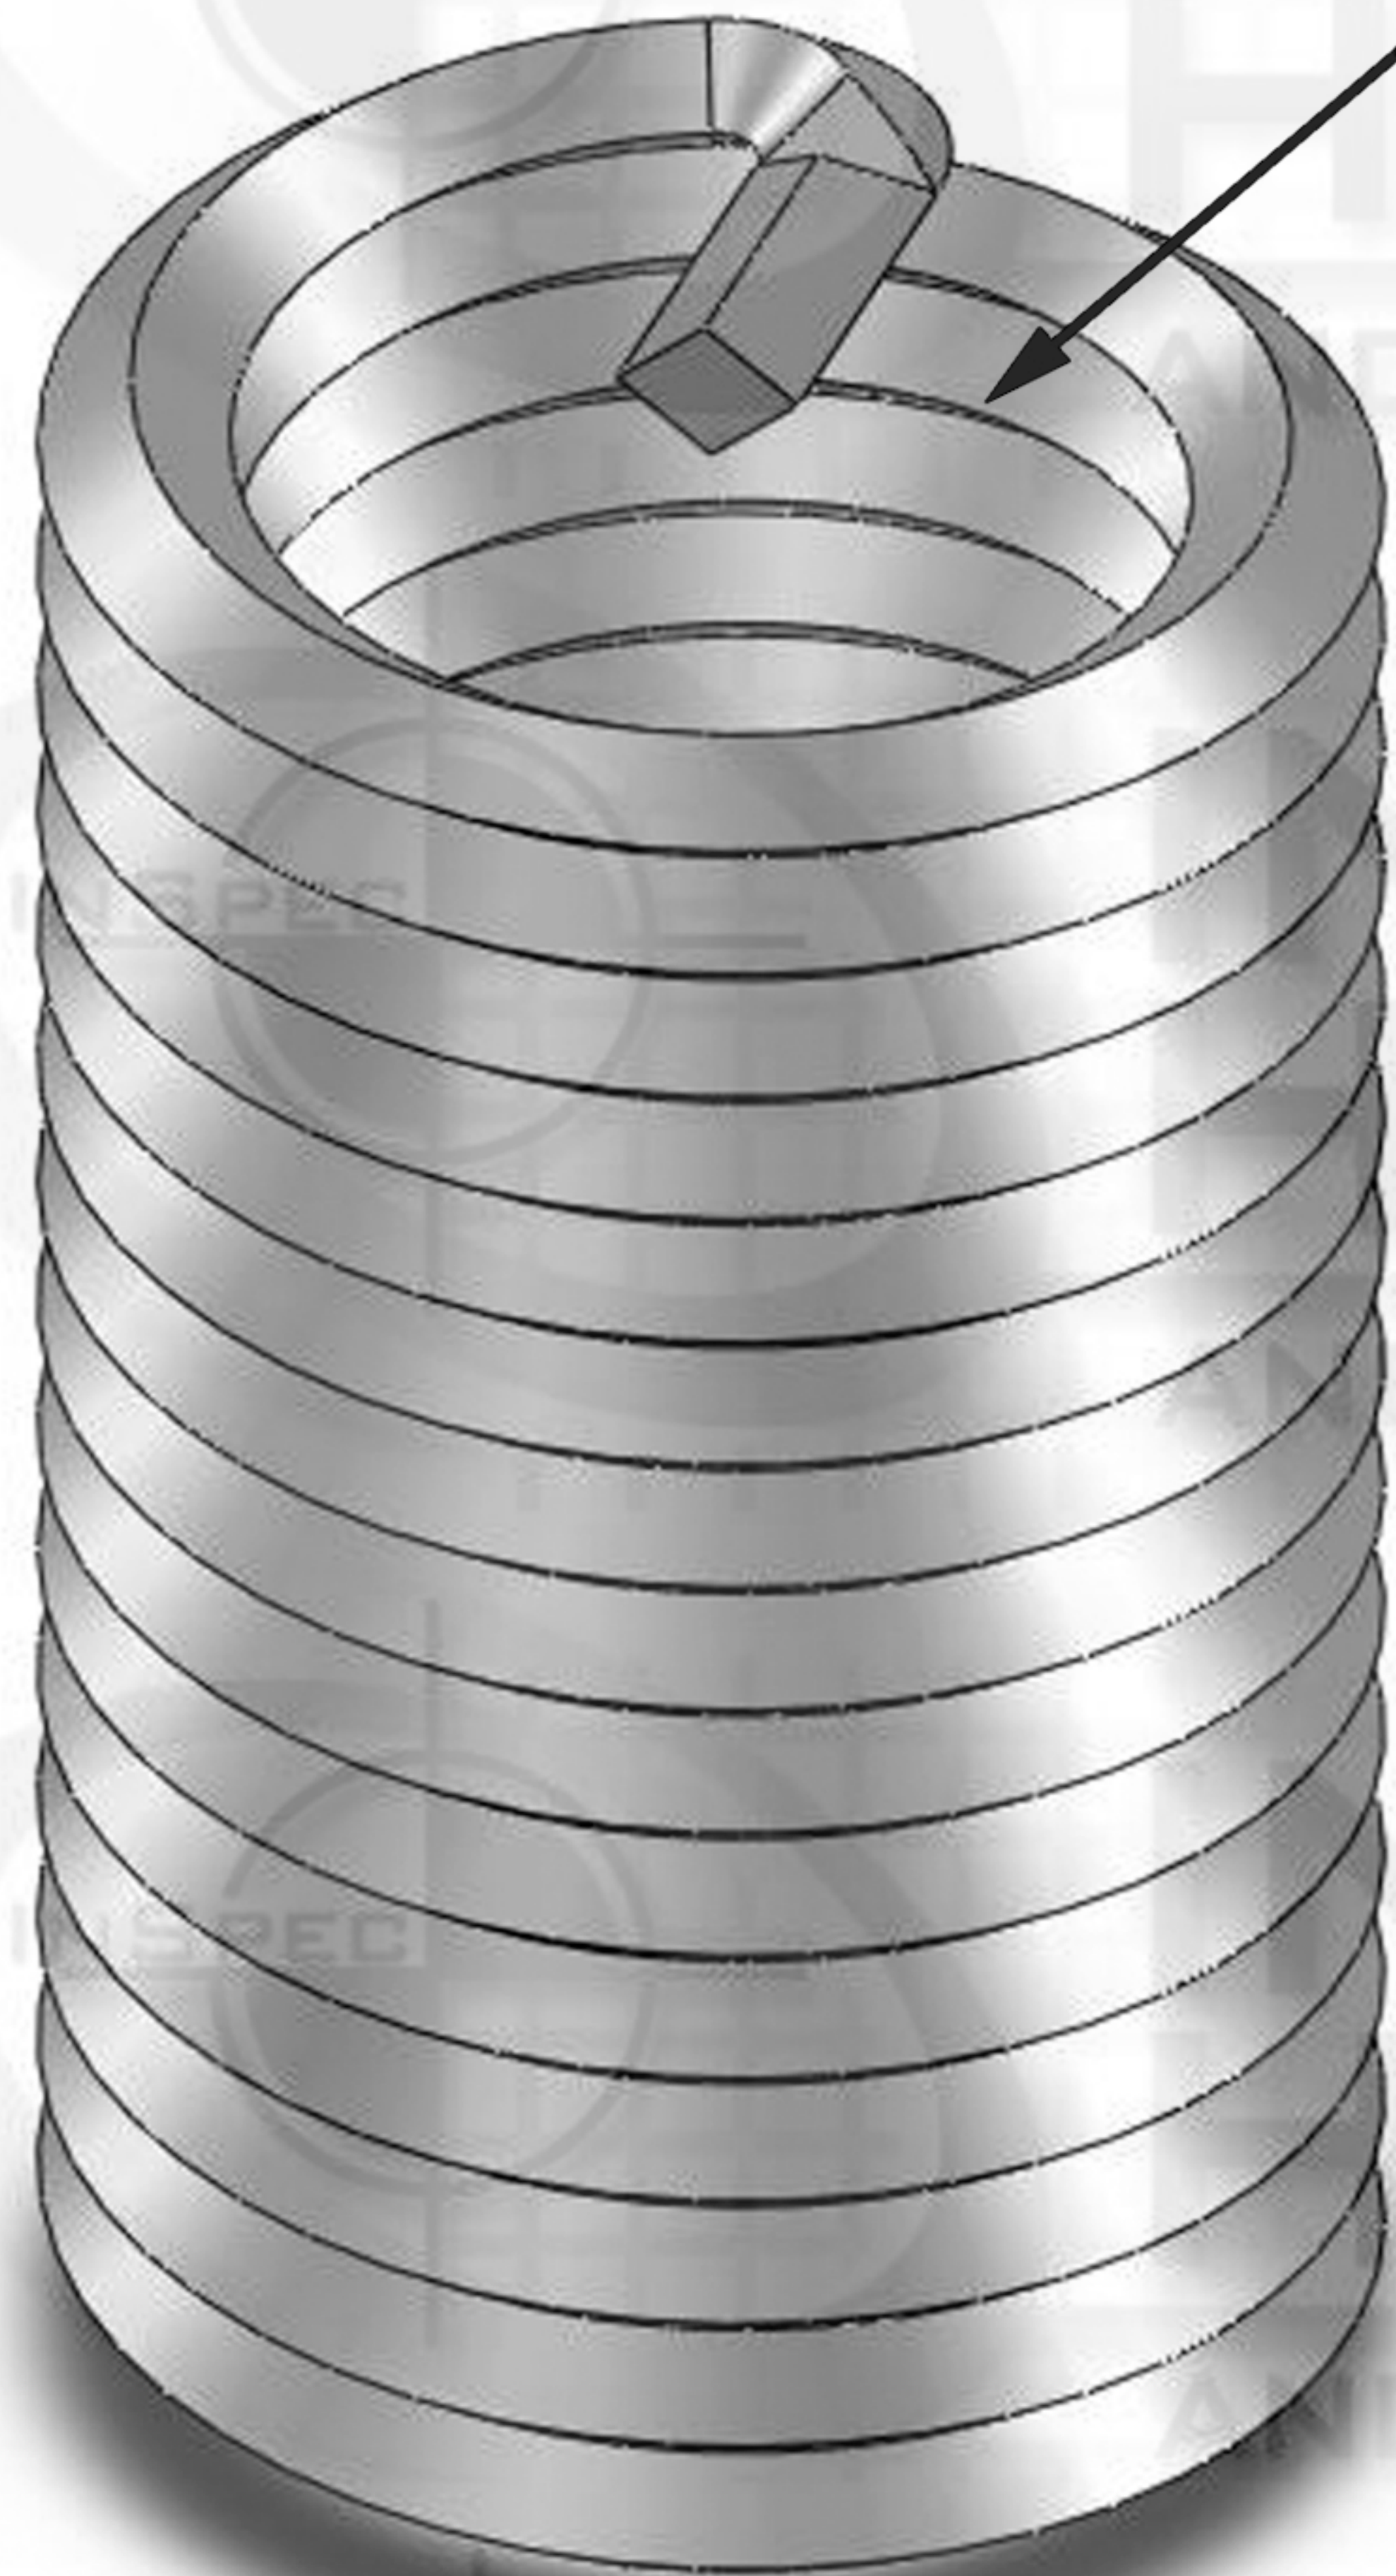

0.297

Suggested Drill Bit Size 0.1065 (#36)



ZONE		REV.	REVISIONS DESCRIPTION	DATE	APPROVED

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND ITS CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES, INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES, INC. IS STRICTLY PROHIBITED.

		MILITARY STANDARD MS21209-C0330	DRAWN	NAME	DATE
		TH. STANDARD: ANSI/ASME ACRONYM: UNC ROTATION: Right-Hand	CHECKED		
		MATERIAL FINISH Stainless Steel 18-8	ENG APPR.		
		PART NUMBER 35L7C-C8JJ-00330-34	MFG APPR.		
NEXT ASSY	USED ON		Q.A.		
		APPLICATION	COMMENTS:		
		DO NOT SCALE DRAWING			



INDUSTRIAL HARDWARE
AND SPECIALTIES INCORPORATED

17-B KENTUCKY AVENUE
PATERSON, NEW JERSEY 07503
TEL: 973-684-4010 FAX: 973-684-3095
email: TechSupport@industrialhardware.com
www.industrialhardware.com

SIZE	DWG. NO.	REV.
A		
SCALE: 1:8	WEIGHT: 0.22	SHEET 1 OF 1