
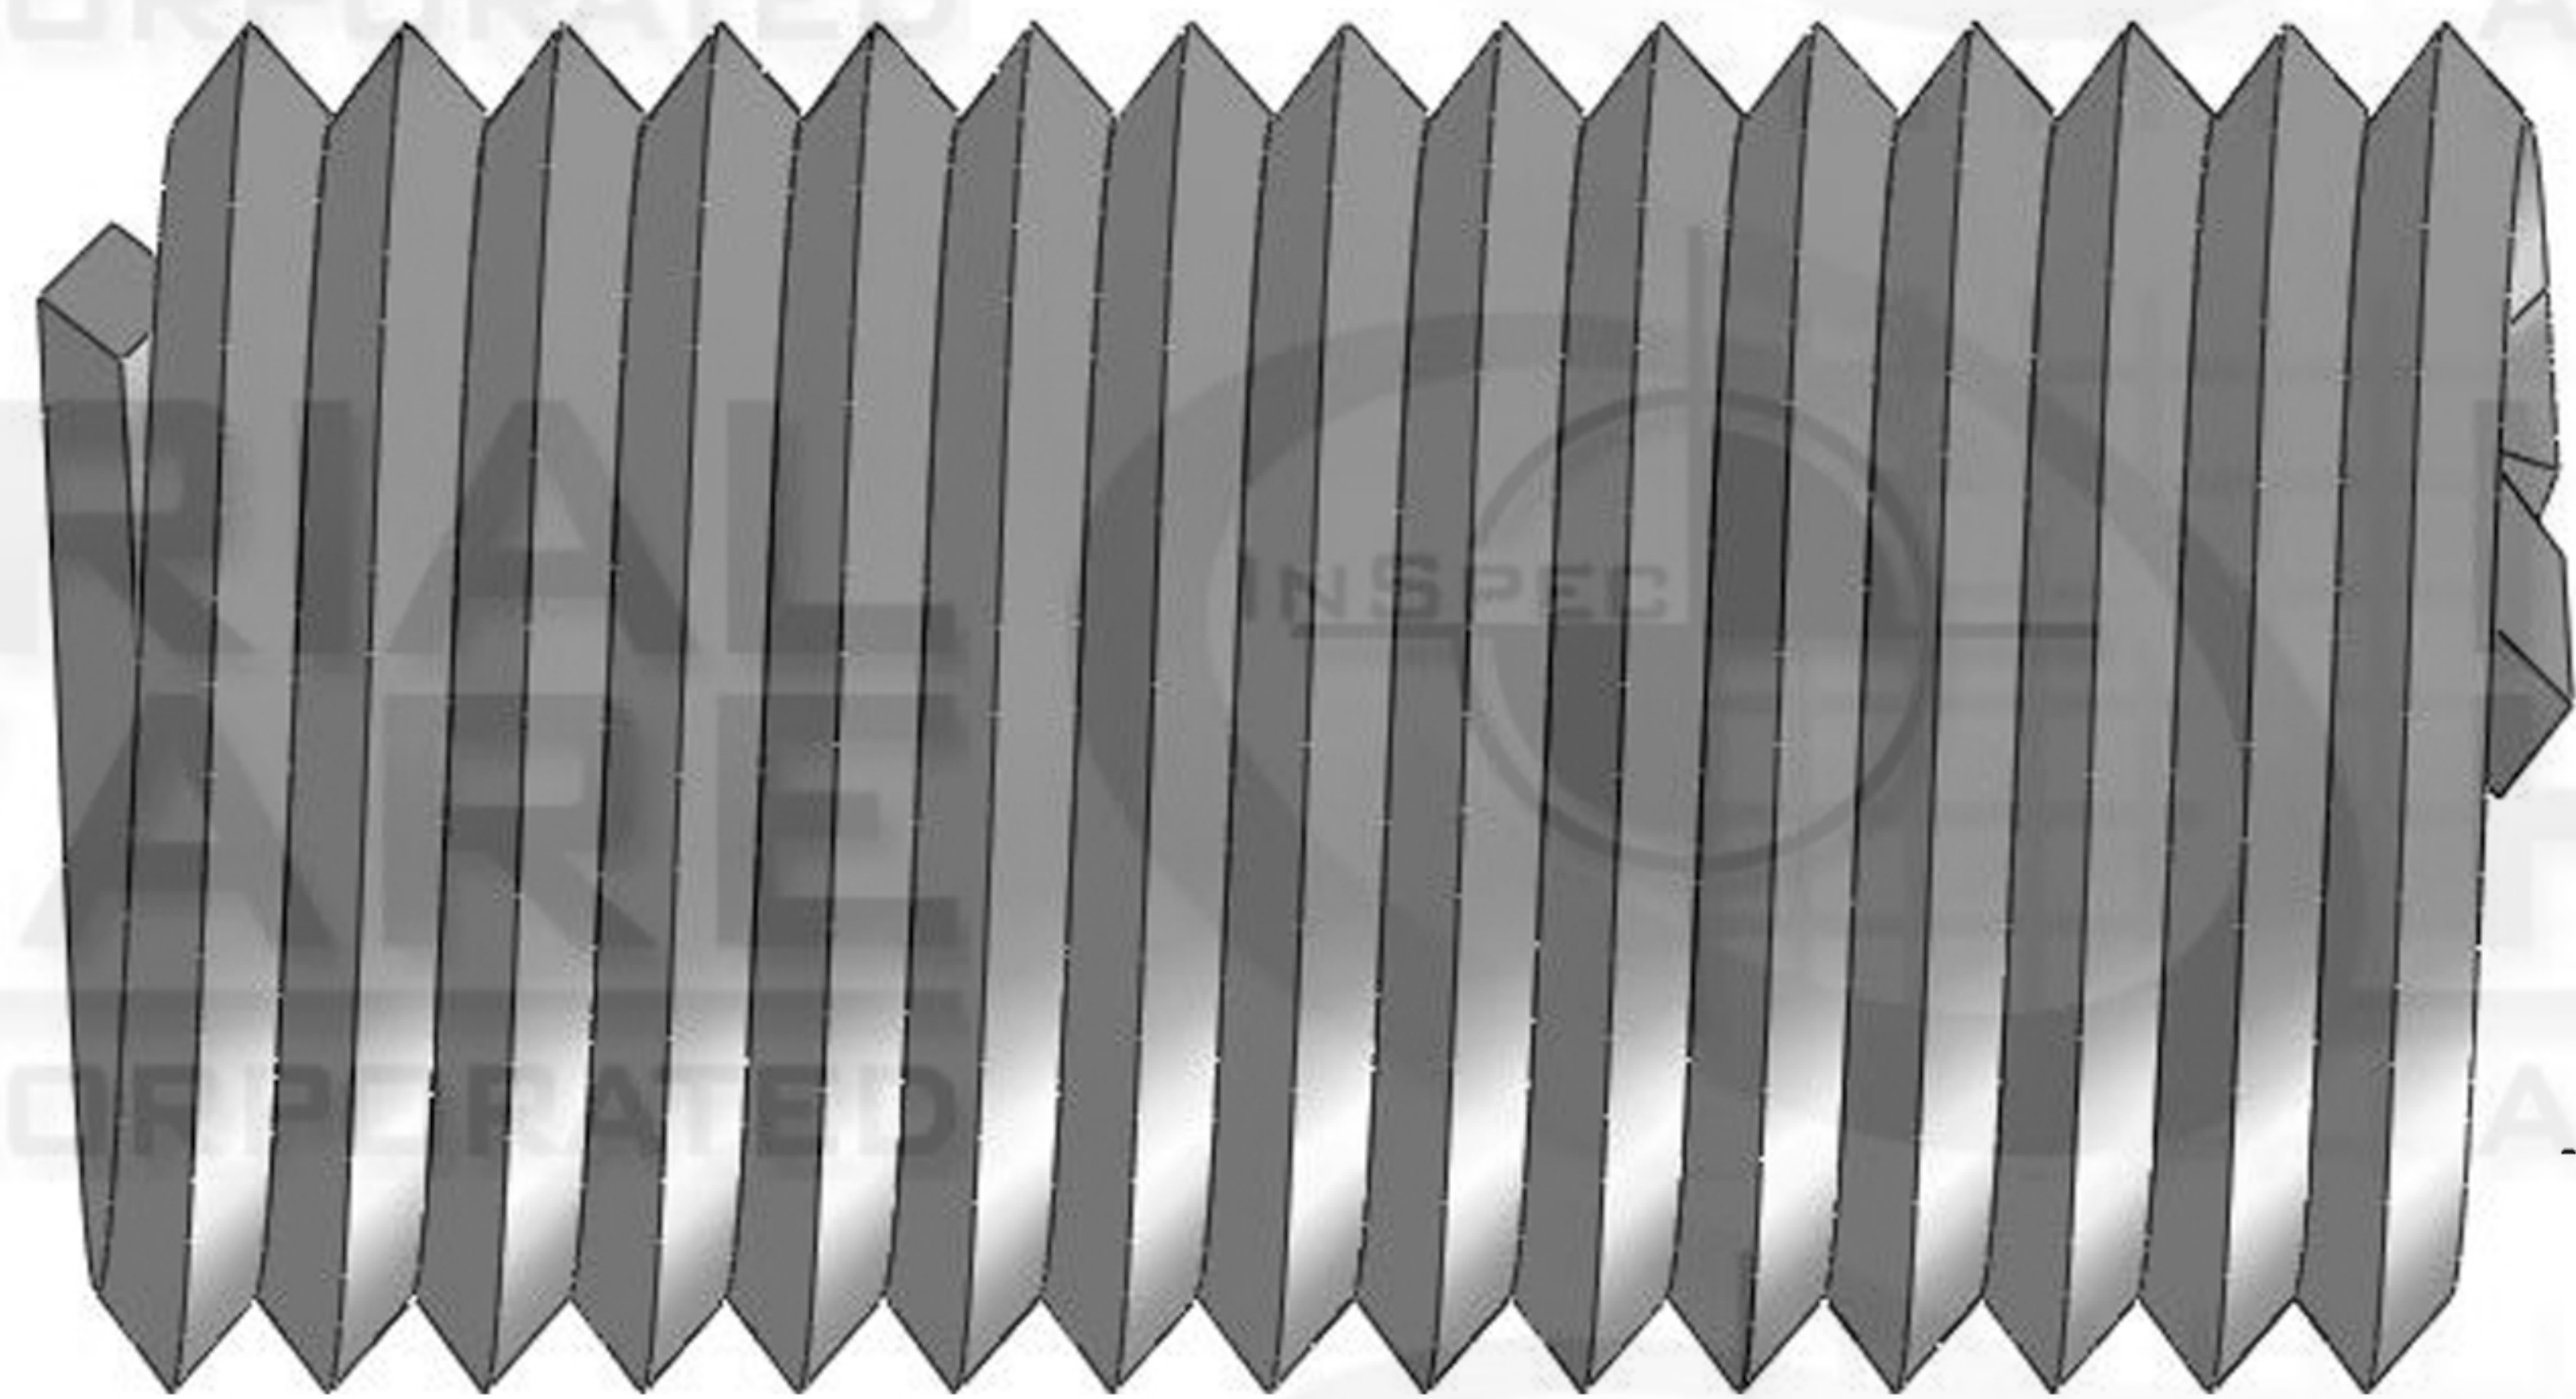
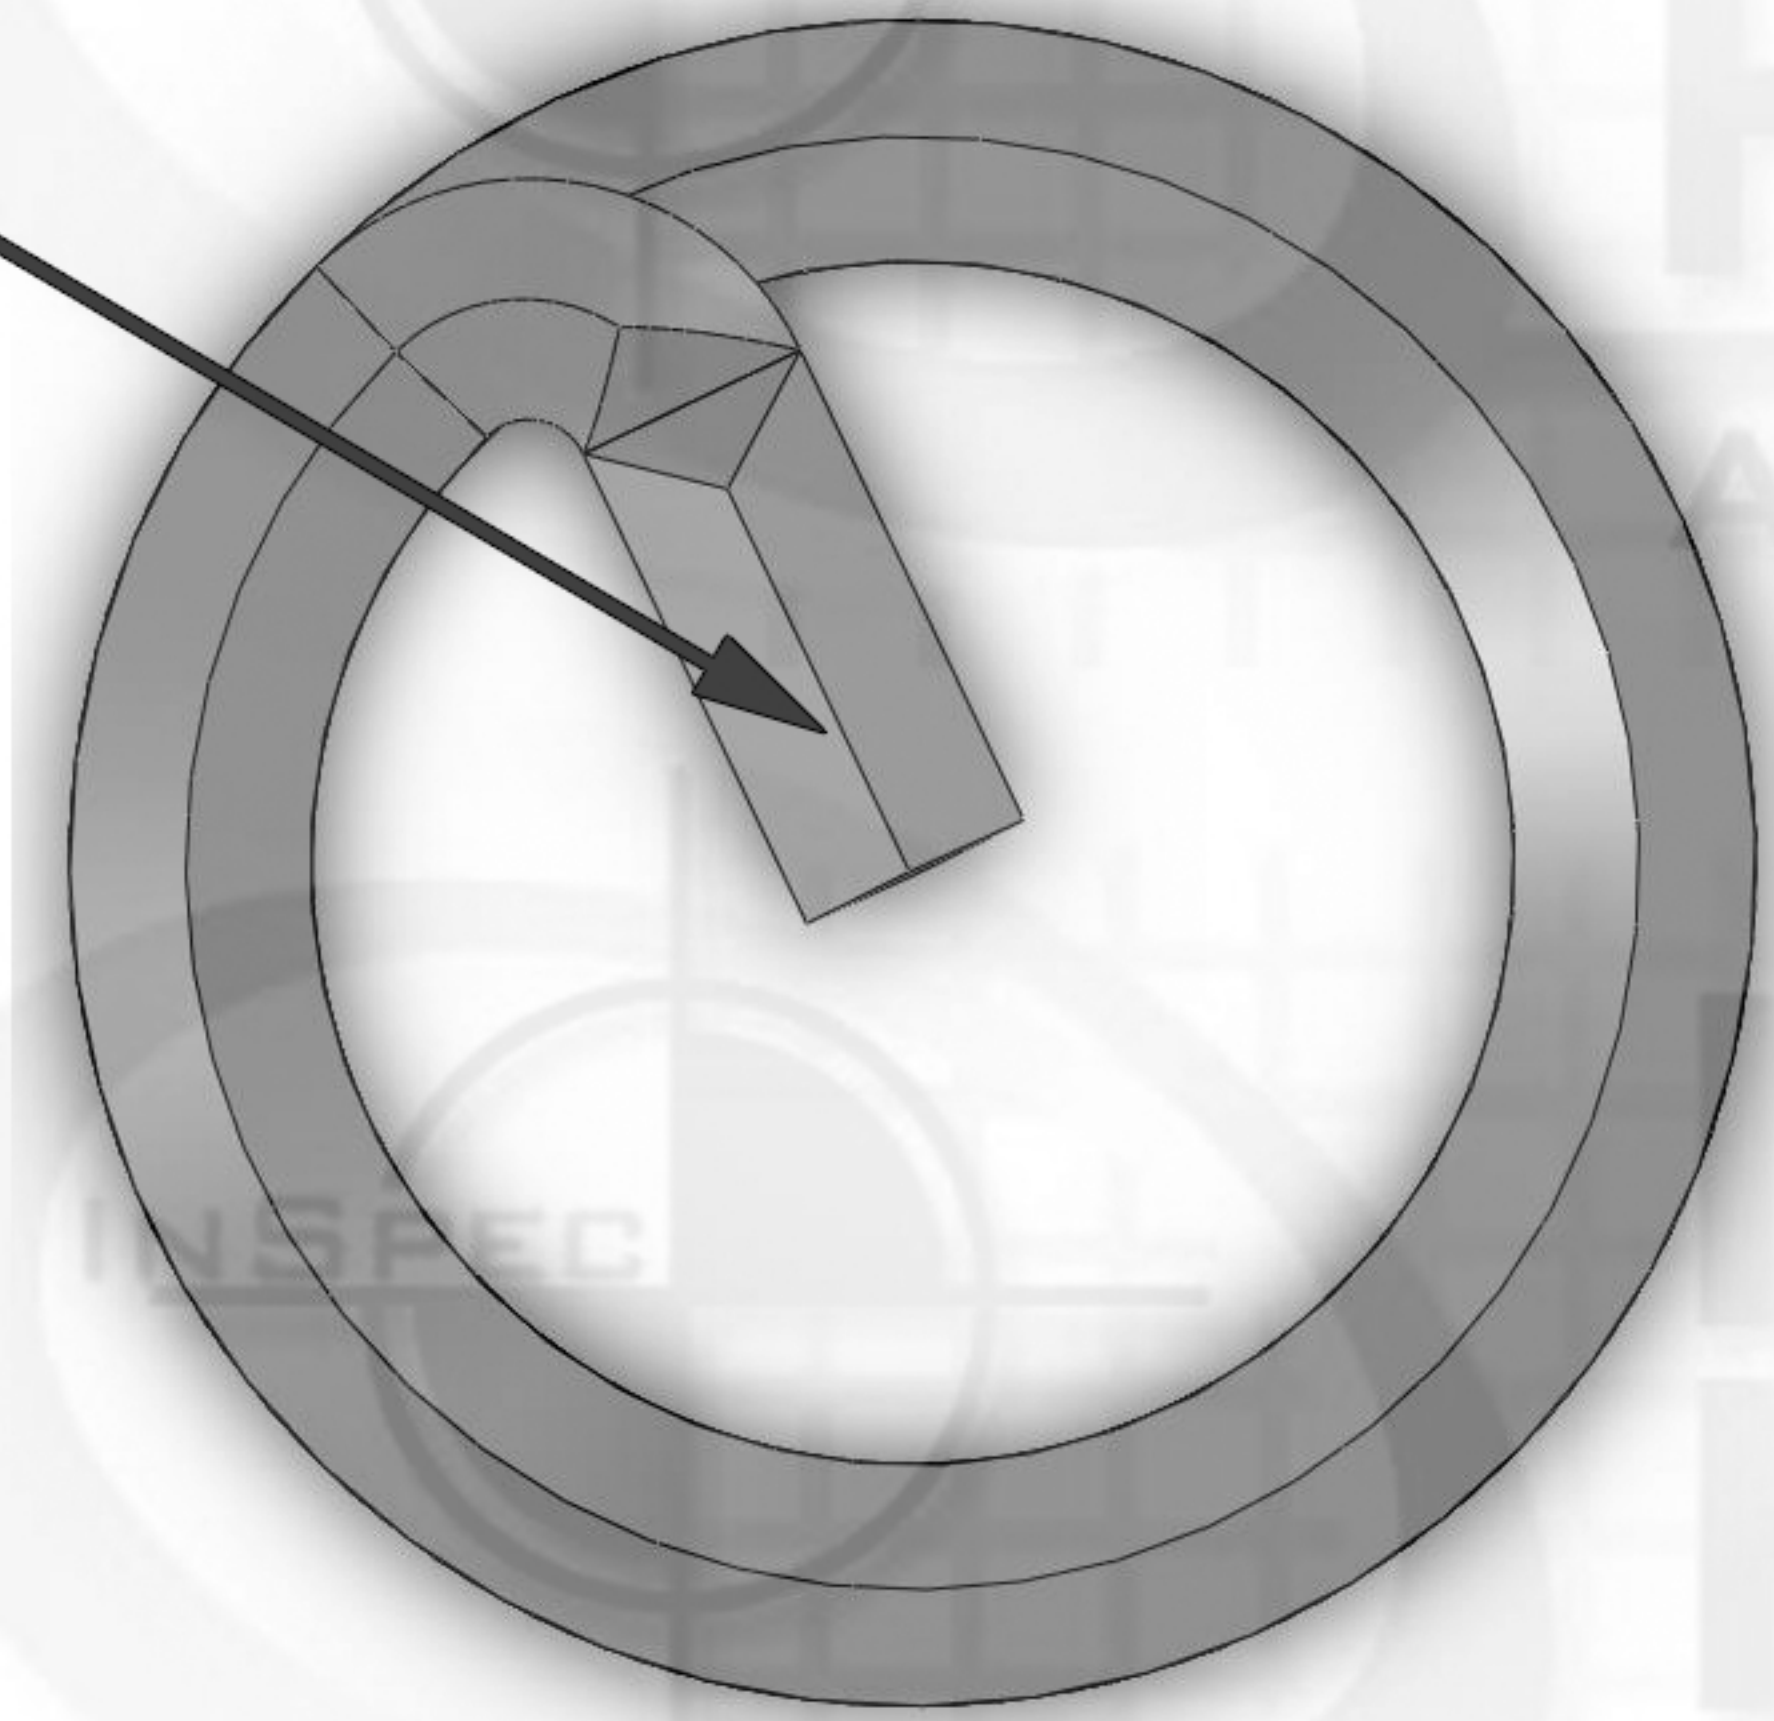


WireSert Locking

Diameter Thread Pitch

10-24

Tang

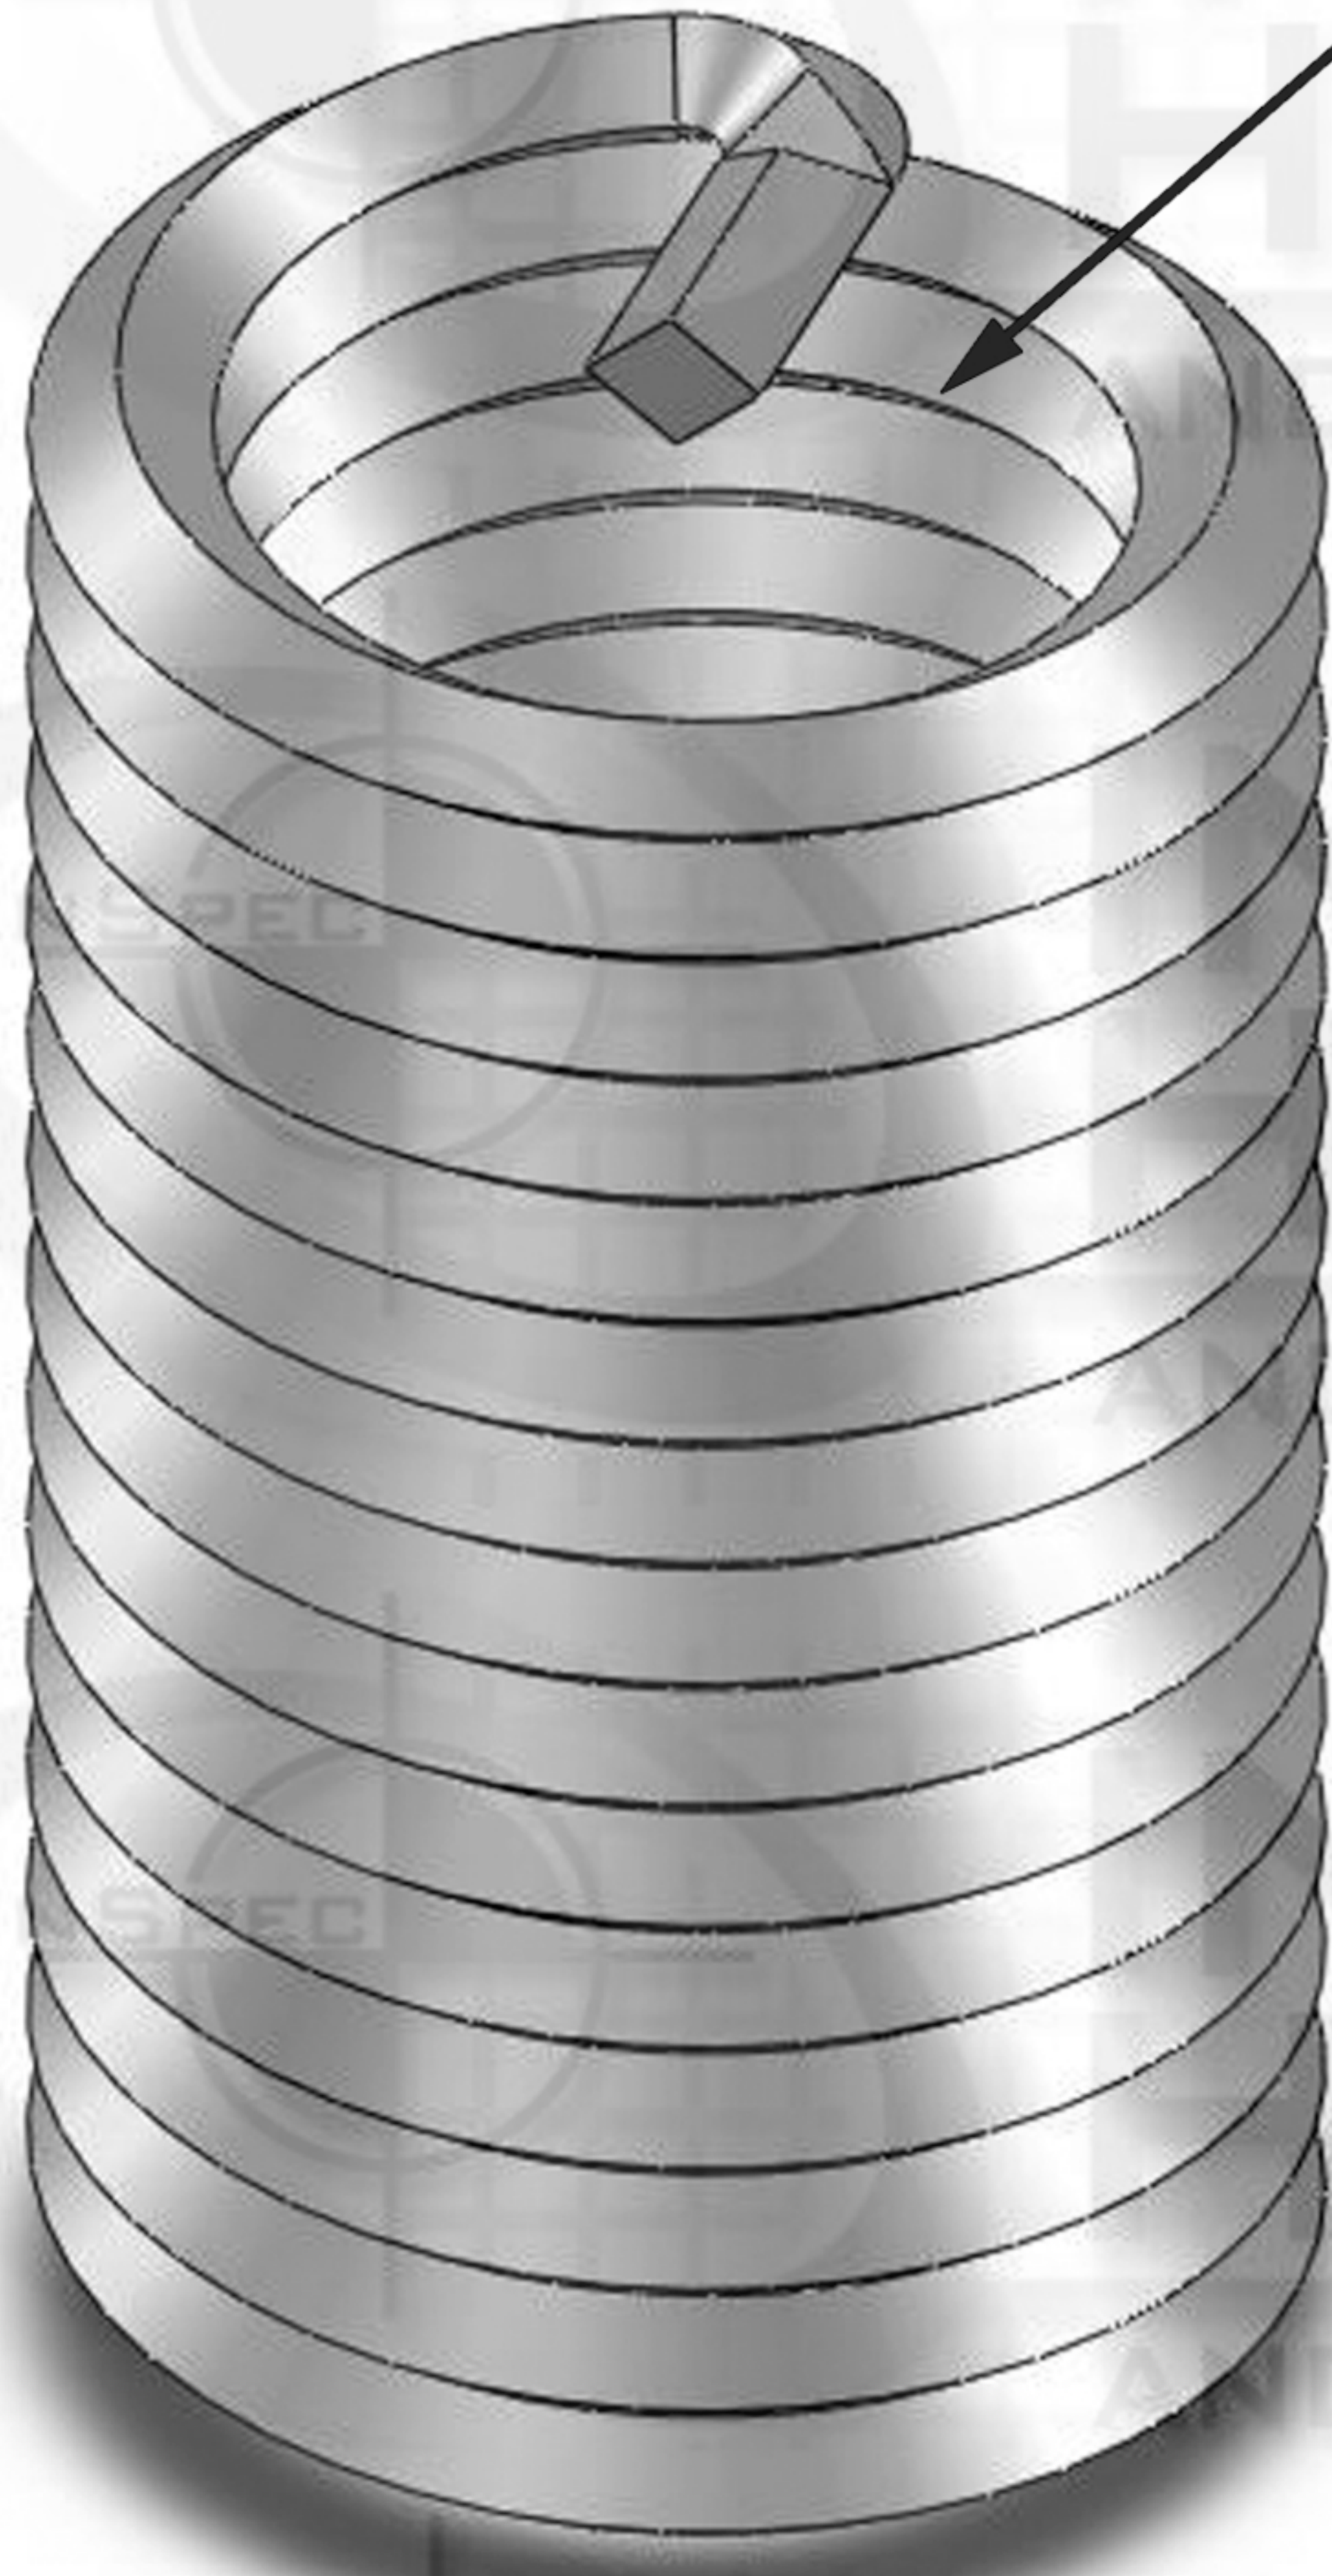

0.19

Suggested Drill Bit Size 0.2031 (13/64)



REVISIONS		DATE	APPROVED
ZONE	REV.	DESCRIPTION	

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

NATIONAL STOCK NUMBER 5340-00-589-5335	NAME	DATE
MILITARY STANDARD MS21209-C1-10	DRAWN	
TH. STANDARD: ANSI/ASME ACRONYM: UNC	CHECKED	
ROTATION: Right-Hand	ENG APPR.	
MATERIAL FINISH Stainless Steel 18-8	MFG APPR.	
PART NUMBER 35L7C-C8JJ-01010-34	Q.A.	
NEXT ASSY	USED ON	COMMENTS:
APPLICATION	DO NOT SCALE DRAWING	



**17-B KENTUCKY AVENUE
PATERSON, NEW JERSEY 07503
TEL: 973-684-4010 FAX: 973-684-3095
email: TechSupport@industrialhardware.com
www.industrialhardware.com**

SIZE A	DWG. NO.	REV.
SCALE:1:8	WEIGHT: 0.07	SHEET 1 OF 1