
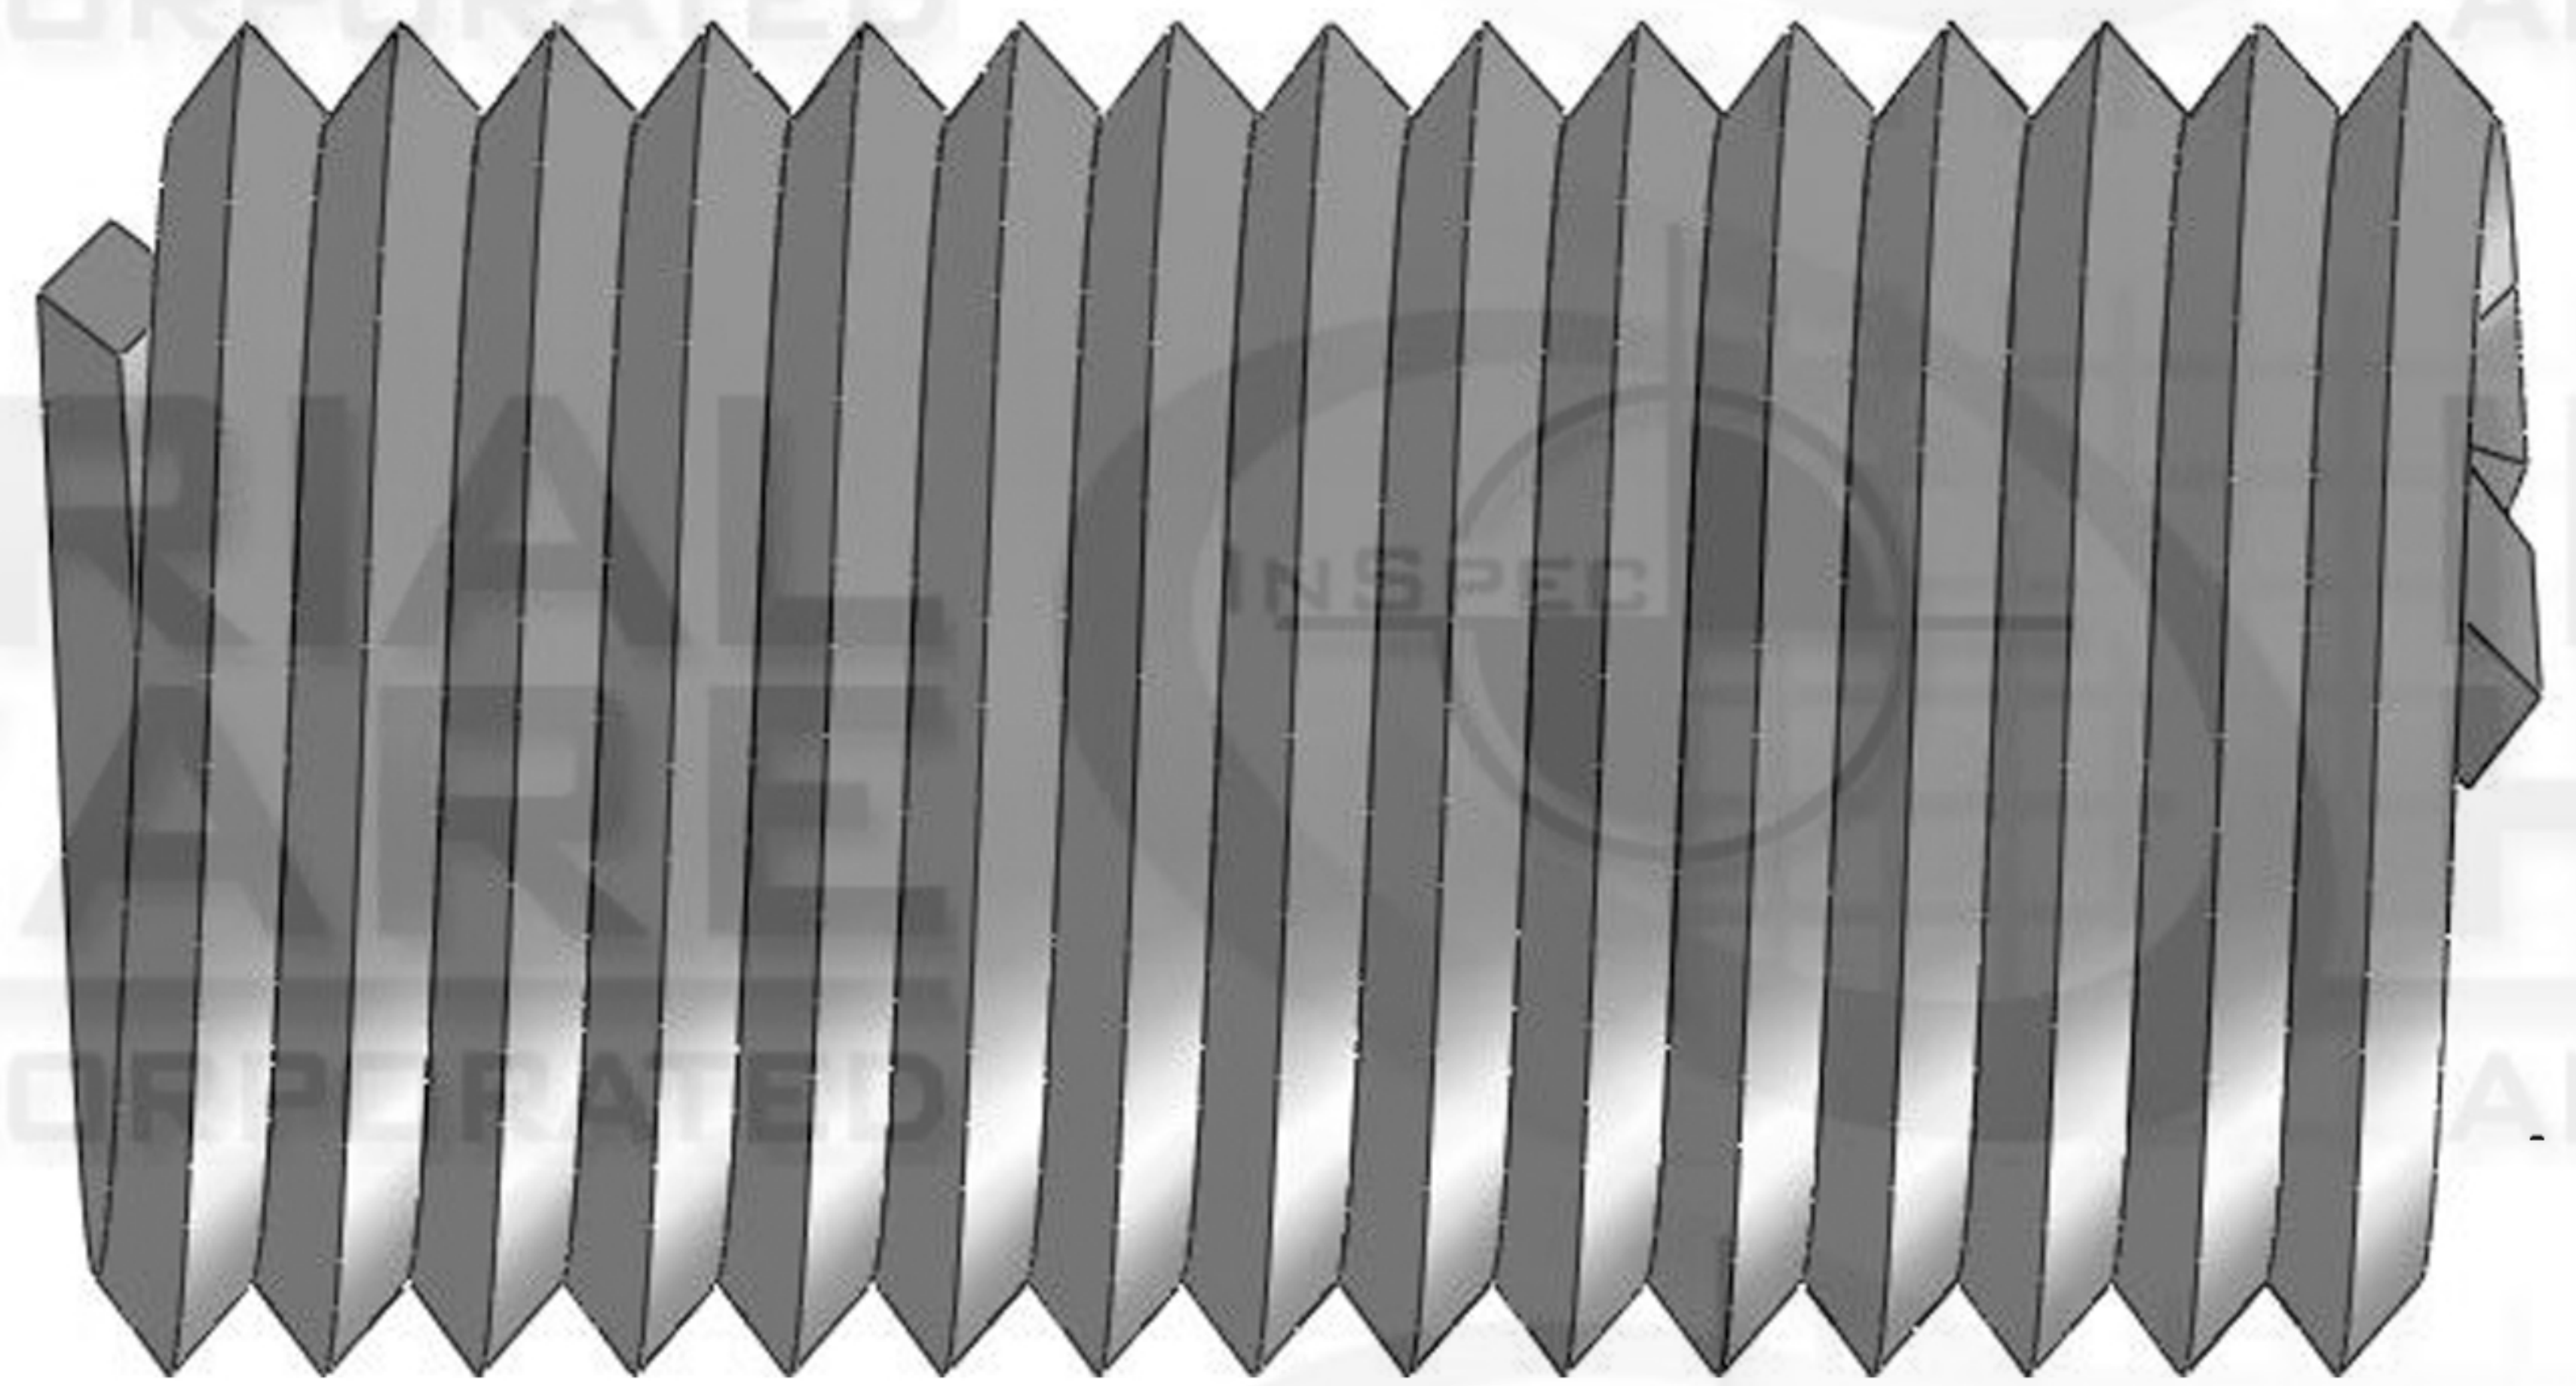
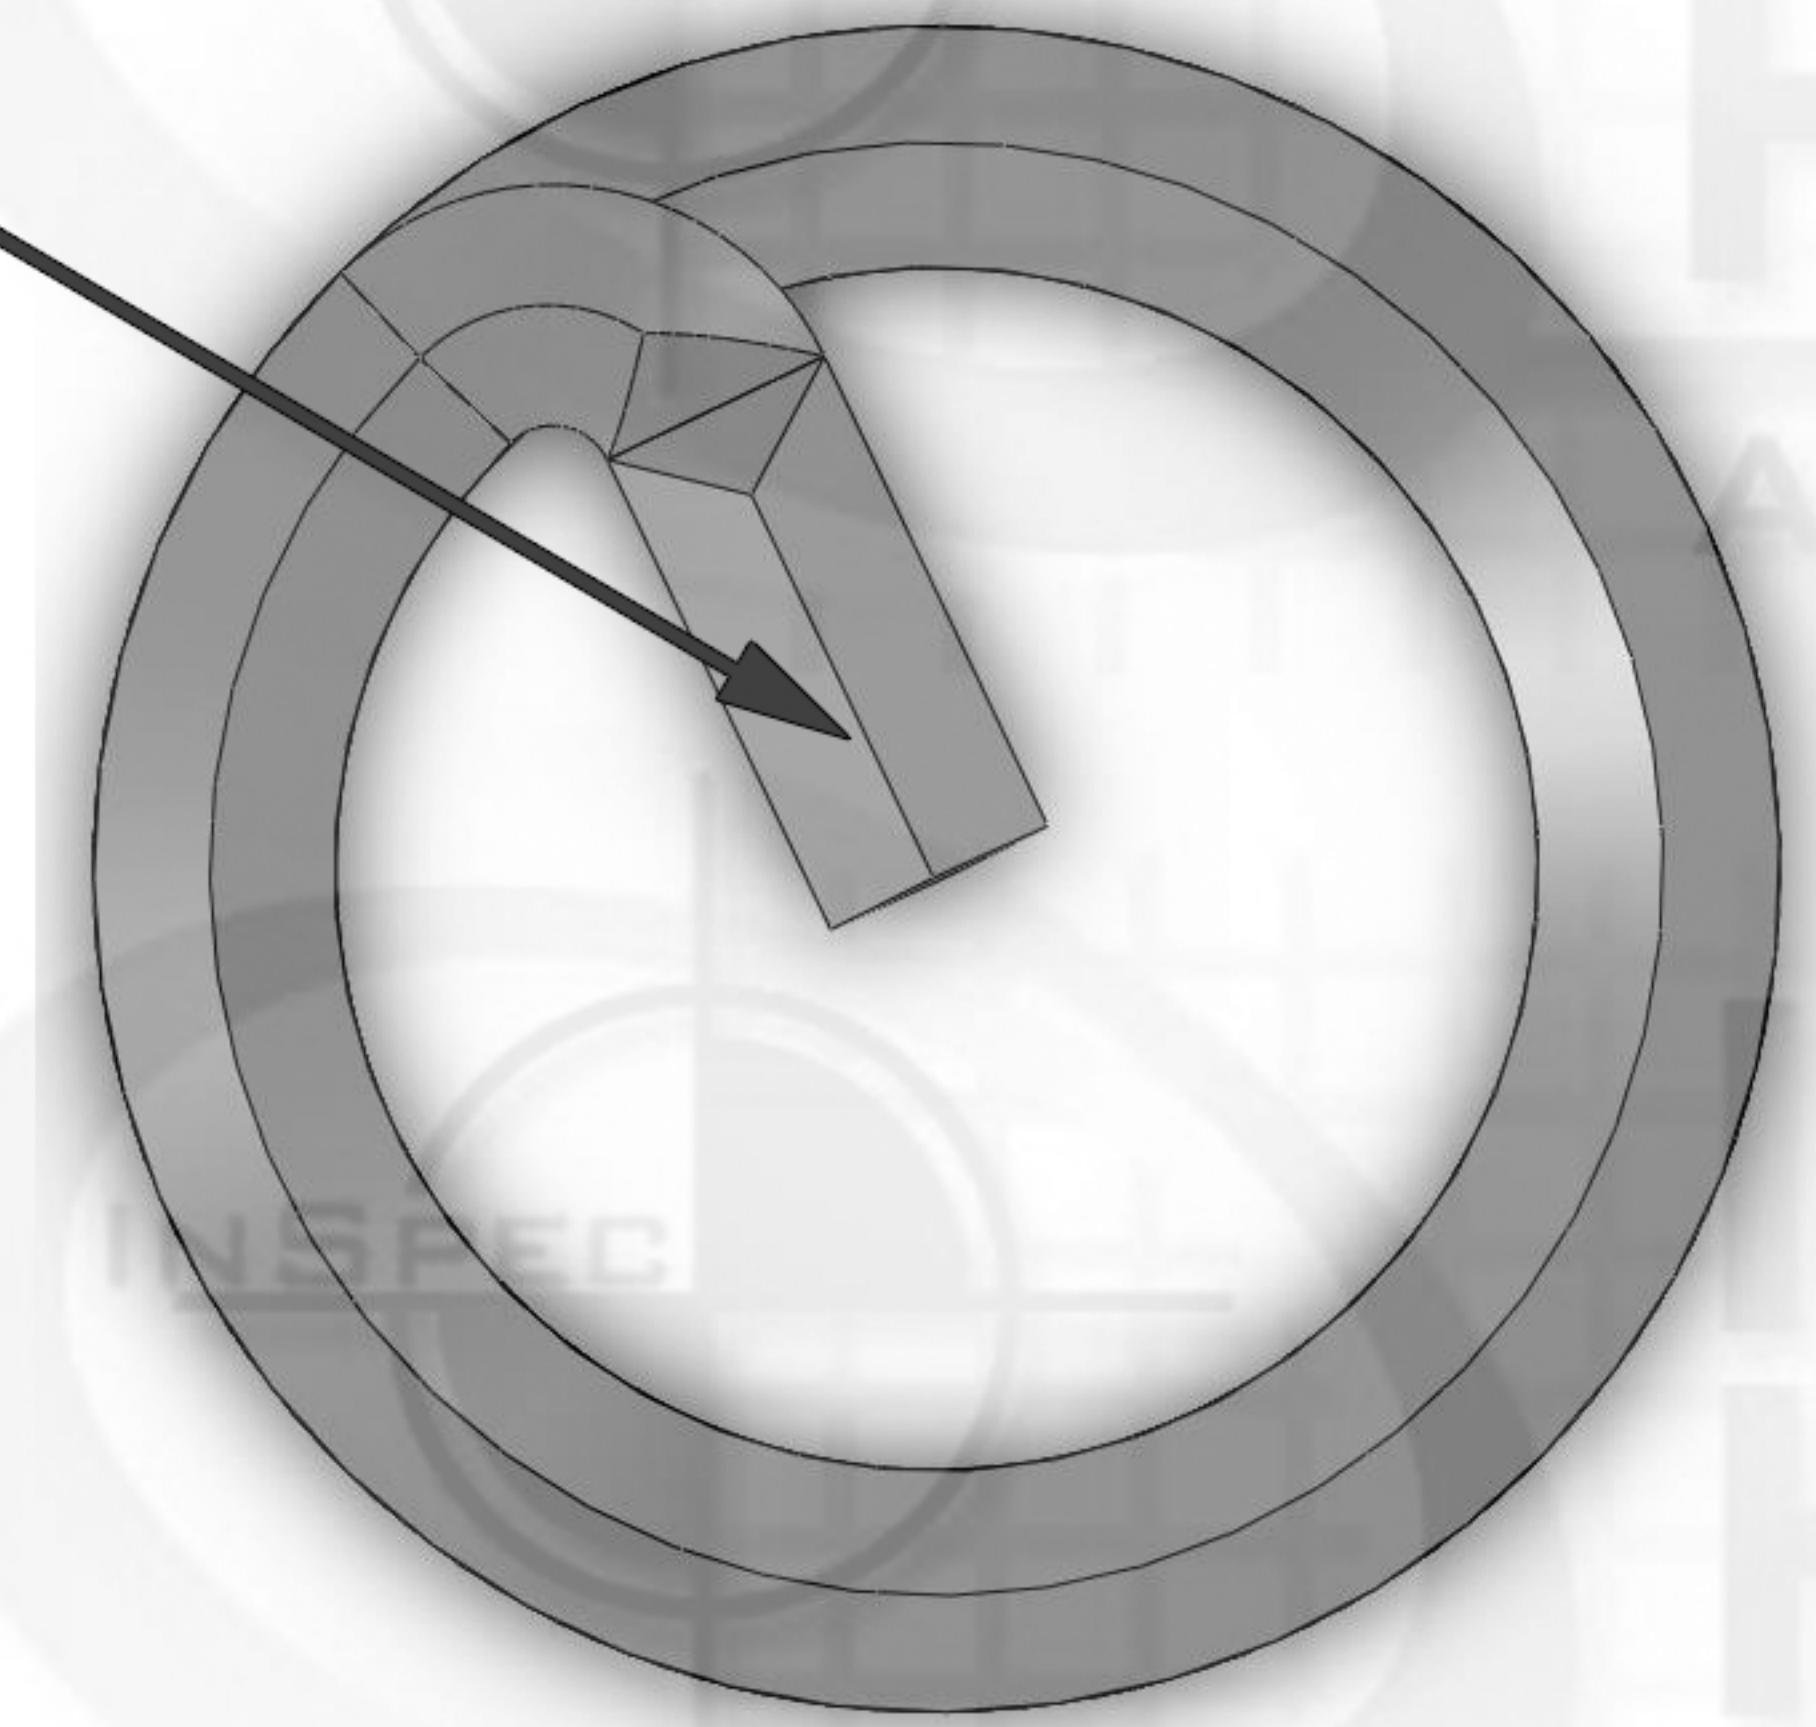


# WireSert Locking

Diameter Thread Pitch

7/8-9

Tang

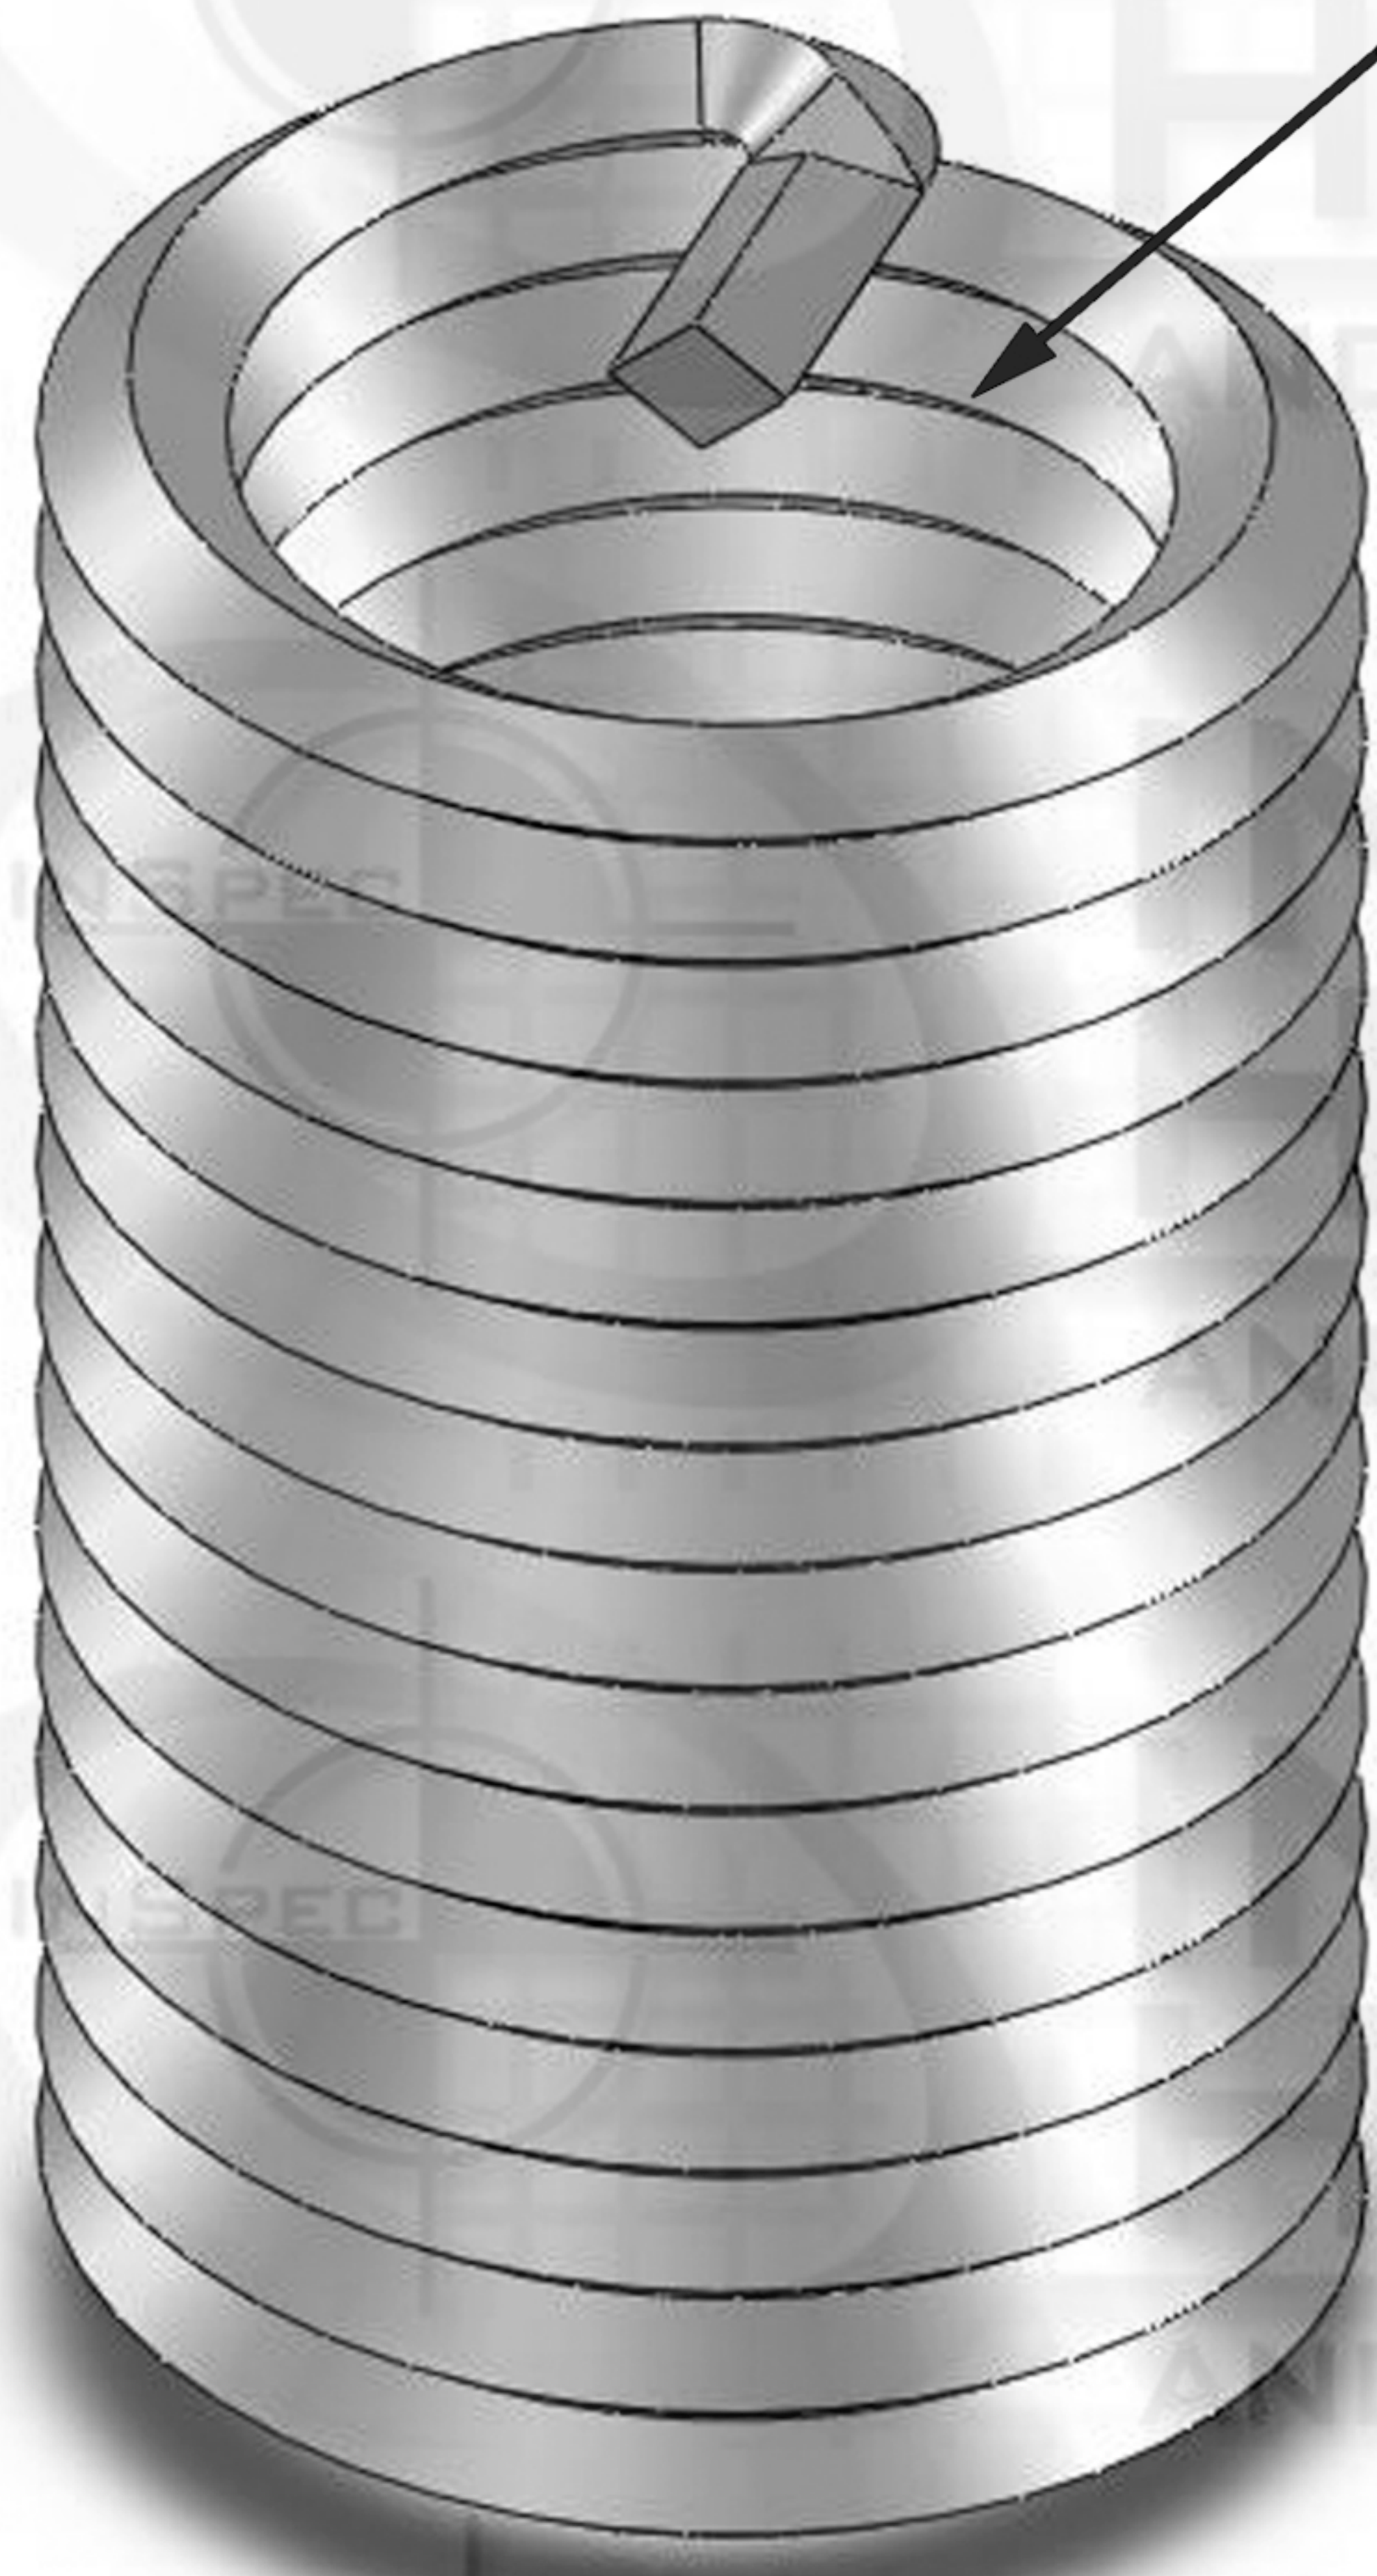

1.75

Suggested Drill Bit Size 0.9063 (29/32)



ZONE		REV.	REVISIONS DESCRIPTION	DATE	APPROVED

## PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

		MILITARY STANDARD MS21209-C1420	DRAWN	NAME	DATE
			CHECKED		
			ENG APPR.		
		TH. STANDARD: ANSI/ASME ACRONYM: UNC ROTATION: Right-Hand MATERIAL FINISH Stainless Steel 18-8	MFG APPR.		
			Q.A.		
NEXT ASSY	USED ON	PART NUMBER 35L7C-C8JJ-08720-0F	COMMENTS:		
APPLICATION	DO NOT SCALE DRAWING				



**INDUSTRIAL HARDWARE**  
AND SPECIALTIES INCORPORATED

17-B KENTUCKY AVENUE  
PATERSON, NEW JERSEY 07503  
TEL: 973-684-4010 FAX: 973-684-3095  
email: TechSupport@industrialhardware.com  
www.industrialhardware.com

SIZE	DWG. NO.	REV.
<b>A</b>		

SCALE: 1:8    WEIGHT: 1.24    SHEET 1 OF 1