


WireSert Locking

Diameter Thread Pitch

12-28

Tang

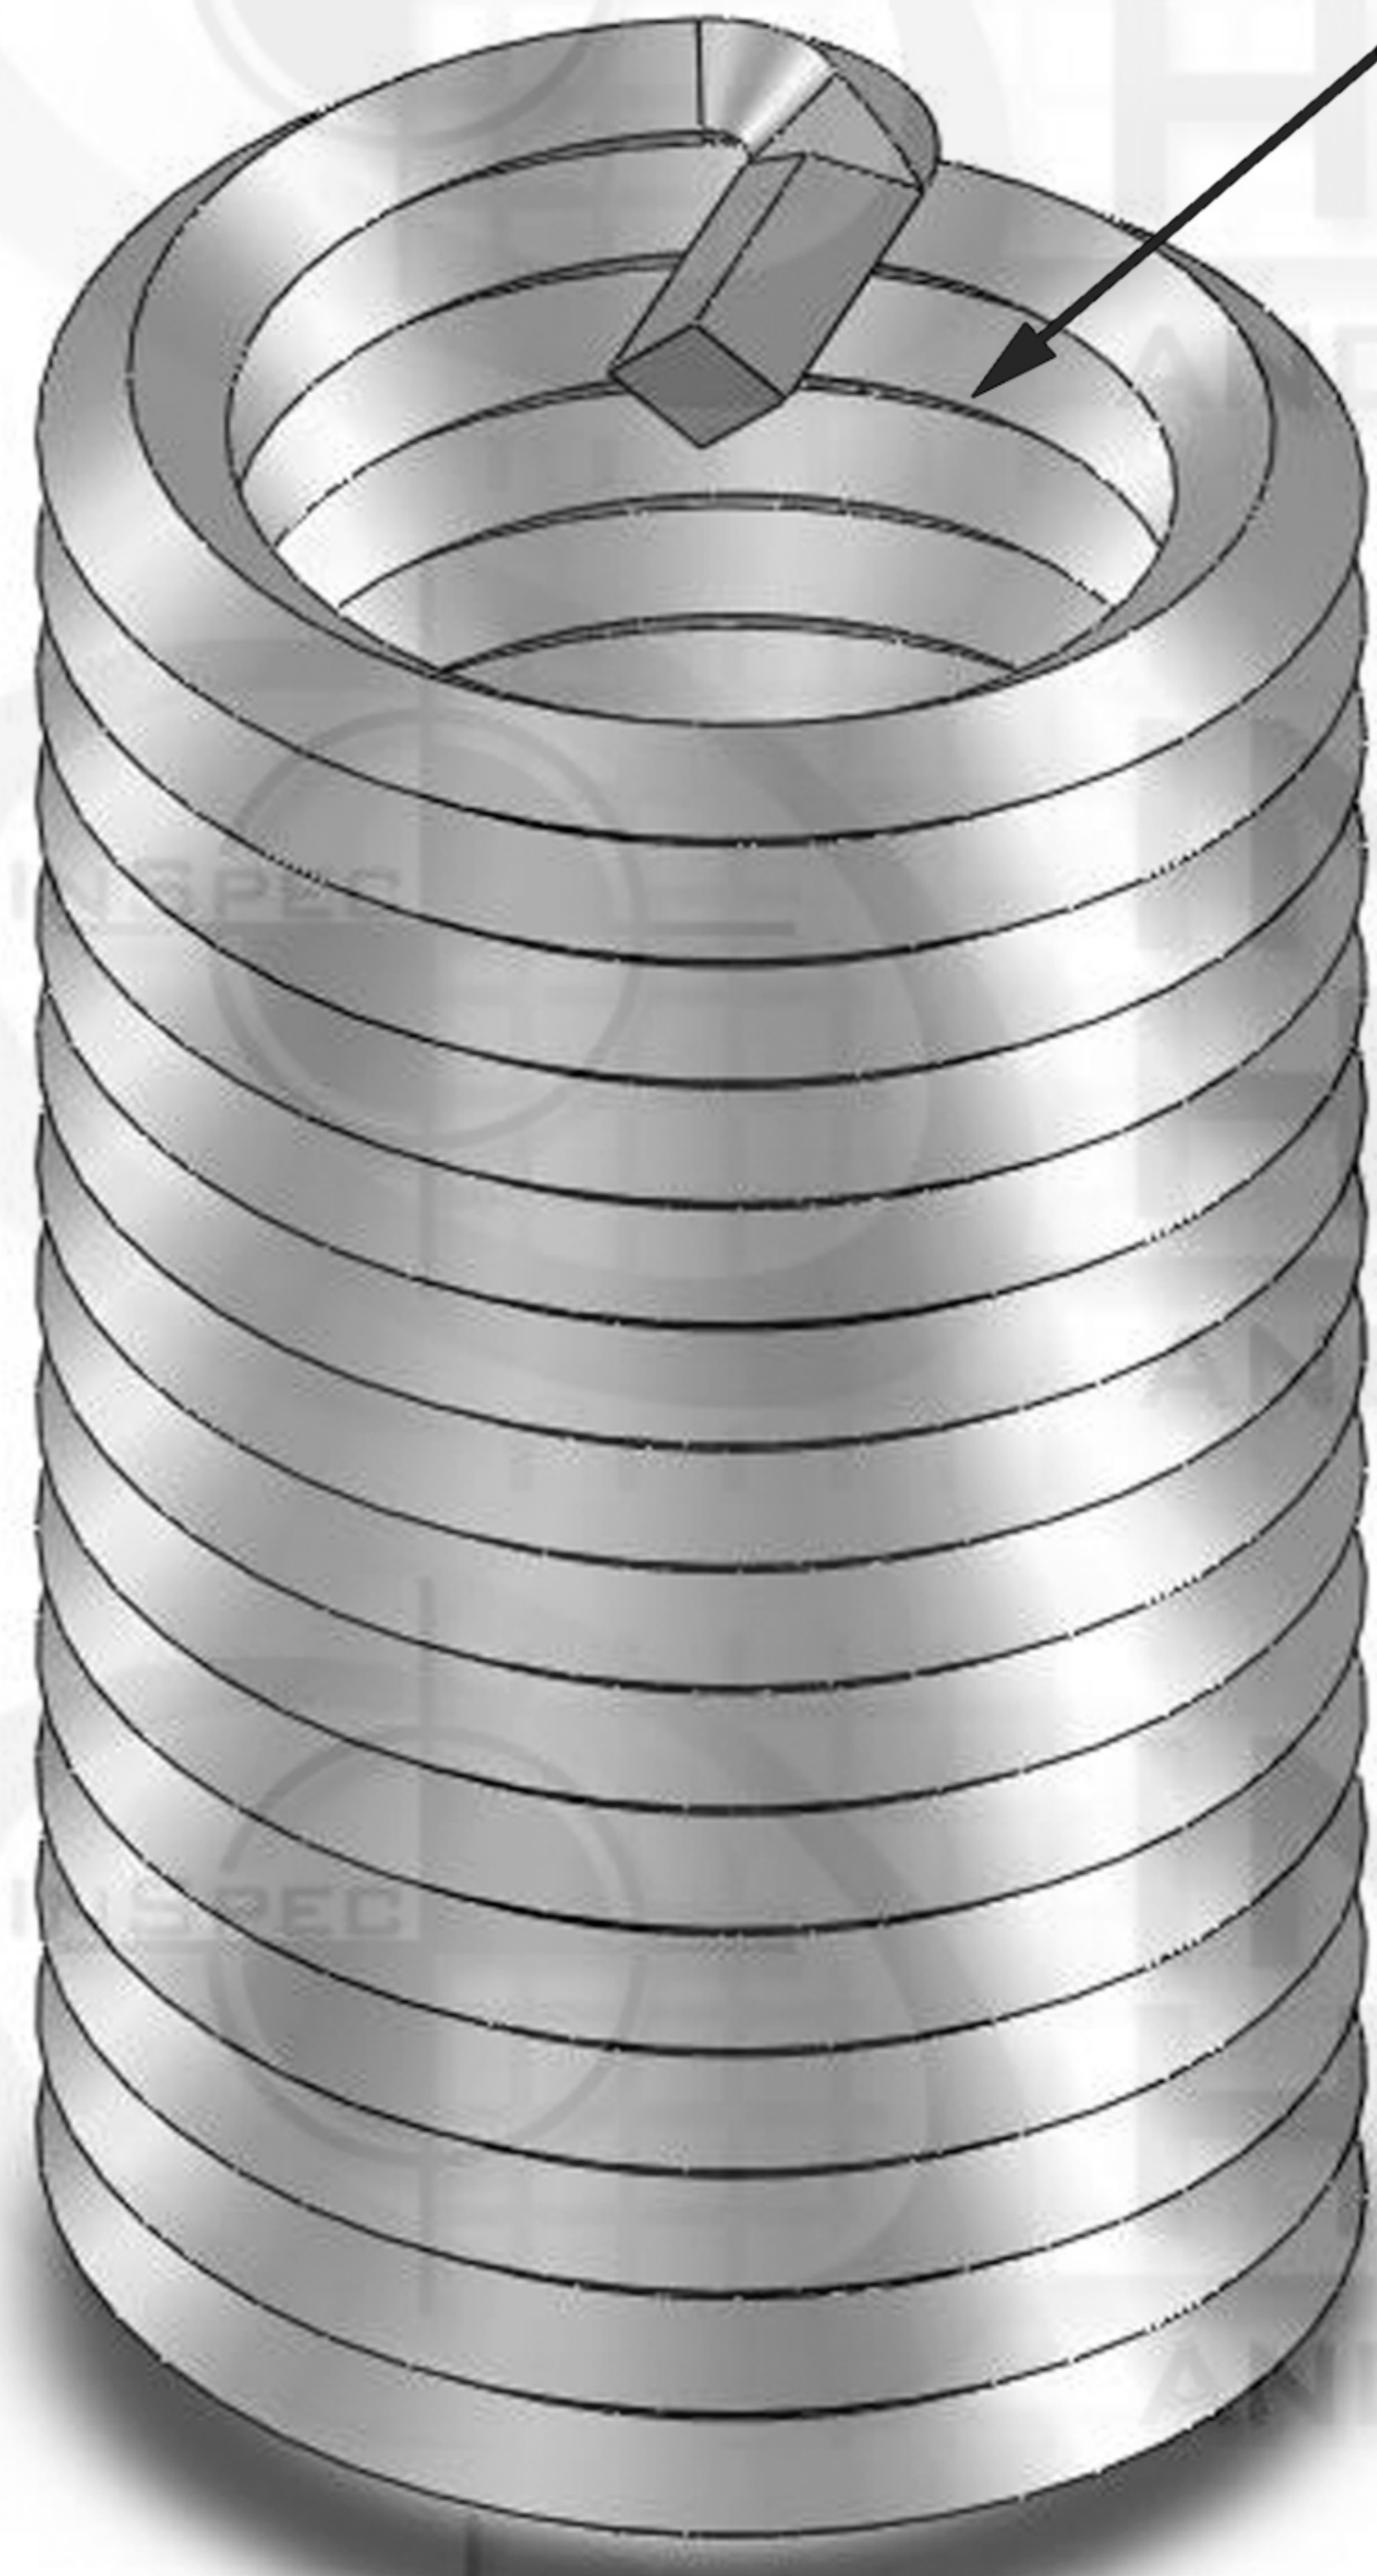

0.432

Suggested Drill Bit Size 0.2344 (15/64)



ZONE		REV.	REVISIONS DESCRIPTION	DATE	APPROVED

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

				NAME	DATE
				DRAWN	
				CHECKED	
				ENG APPR.	
				MFG APPR.	
				Q.A.	
				COMMENTS:	
NEXT ASSY	USED ON	TH. STANDARD: ANSI/ASME ACRONYM: UNF ROTATION: Right-Hand MATERIAL FINISH Stainless Steel 18-8	PART NUMBER 35L7C-C8K4-01220-34		
		APPLICATION	DO NOT SCALE DRAWING		



INDUSTRIAL HARDWARE AND SPECIALTIES INCORPORATED

17-B KENTUCKY AVENUE
 PATERSON, NEW JERSEY 07503
 TEL: 973-684-4010 FAX: 973-684-3095
 email: TechSupport@industrialhardware.com
 www.industrialhardware.com

SIZE	DWG. NO.	REV.
A		
SCALE: 1:8	WEIGHT: 0.04	SHEET 1 OF 1