
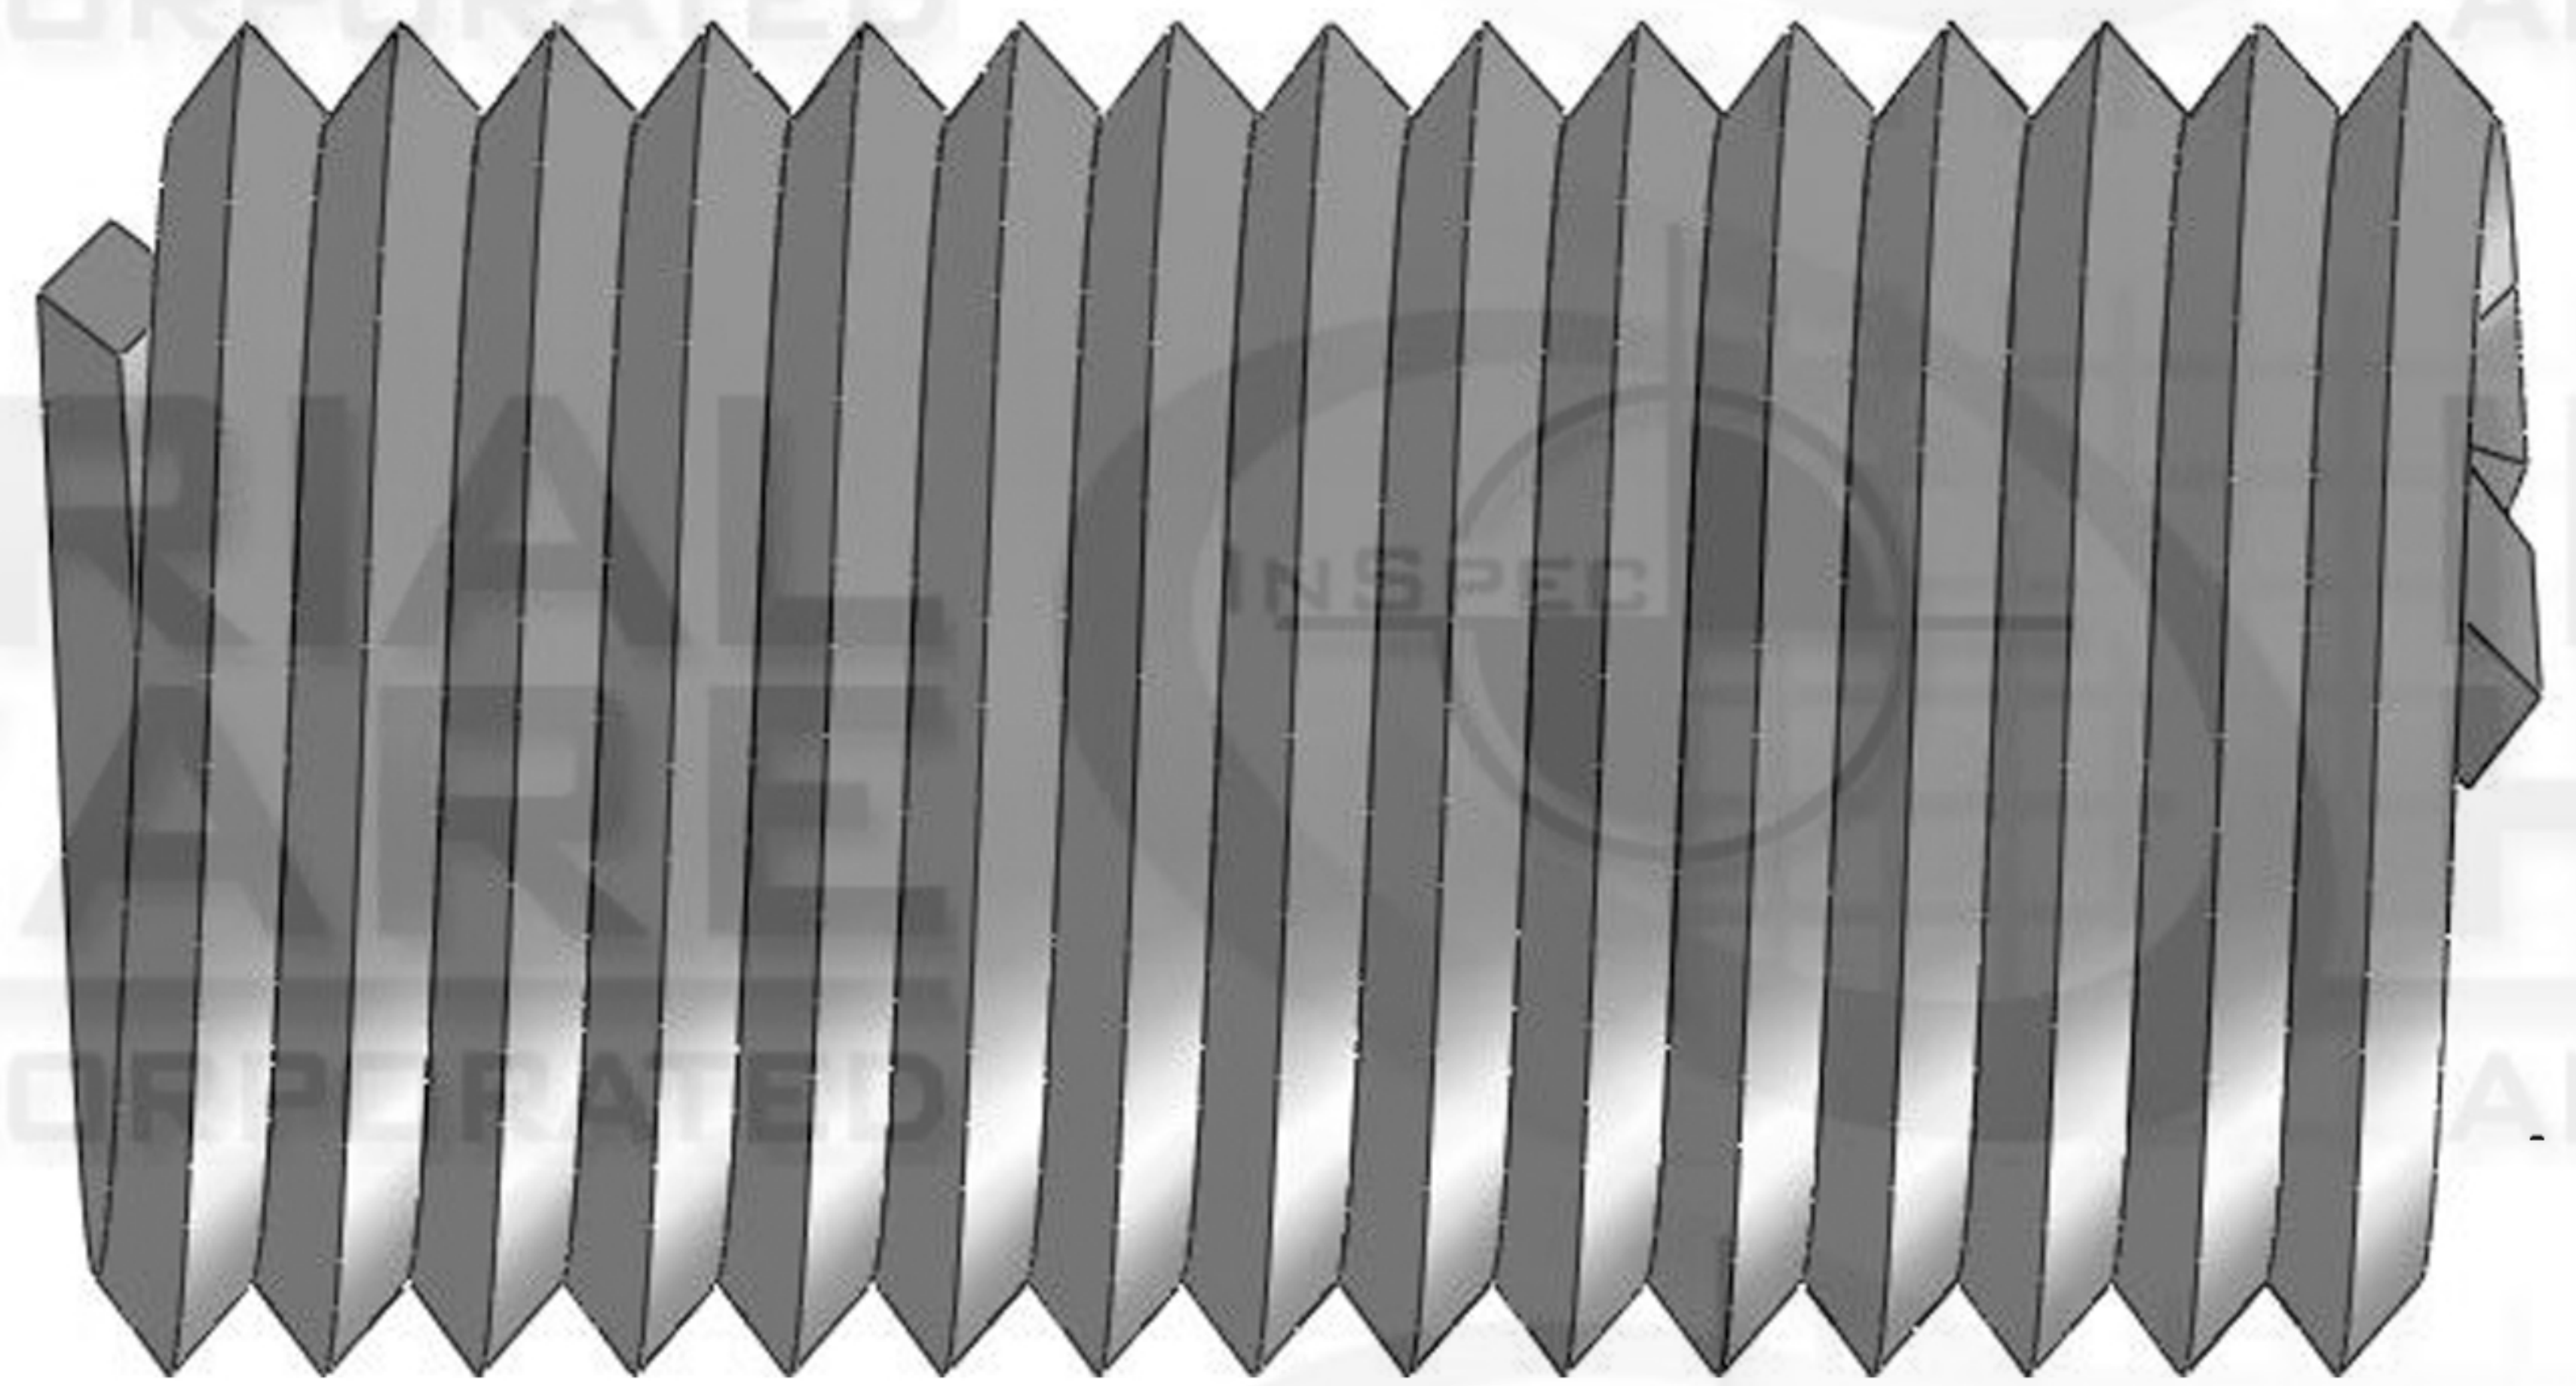
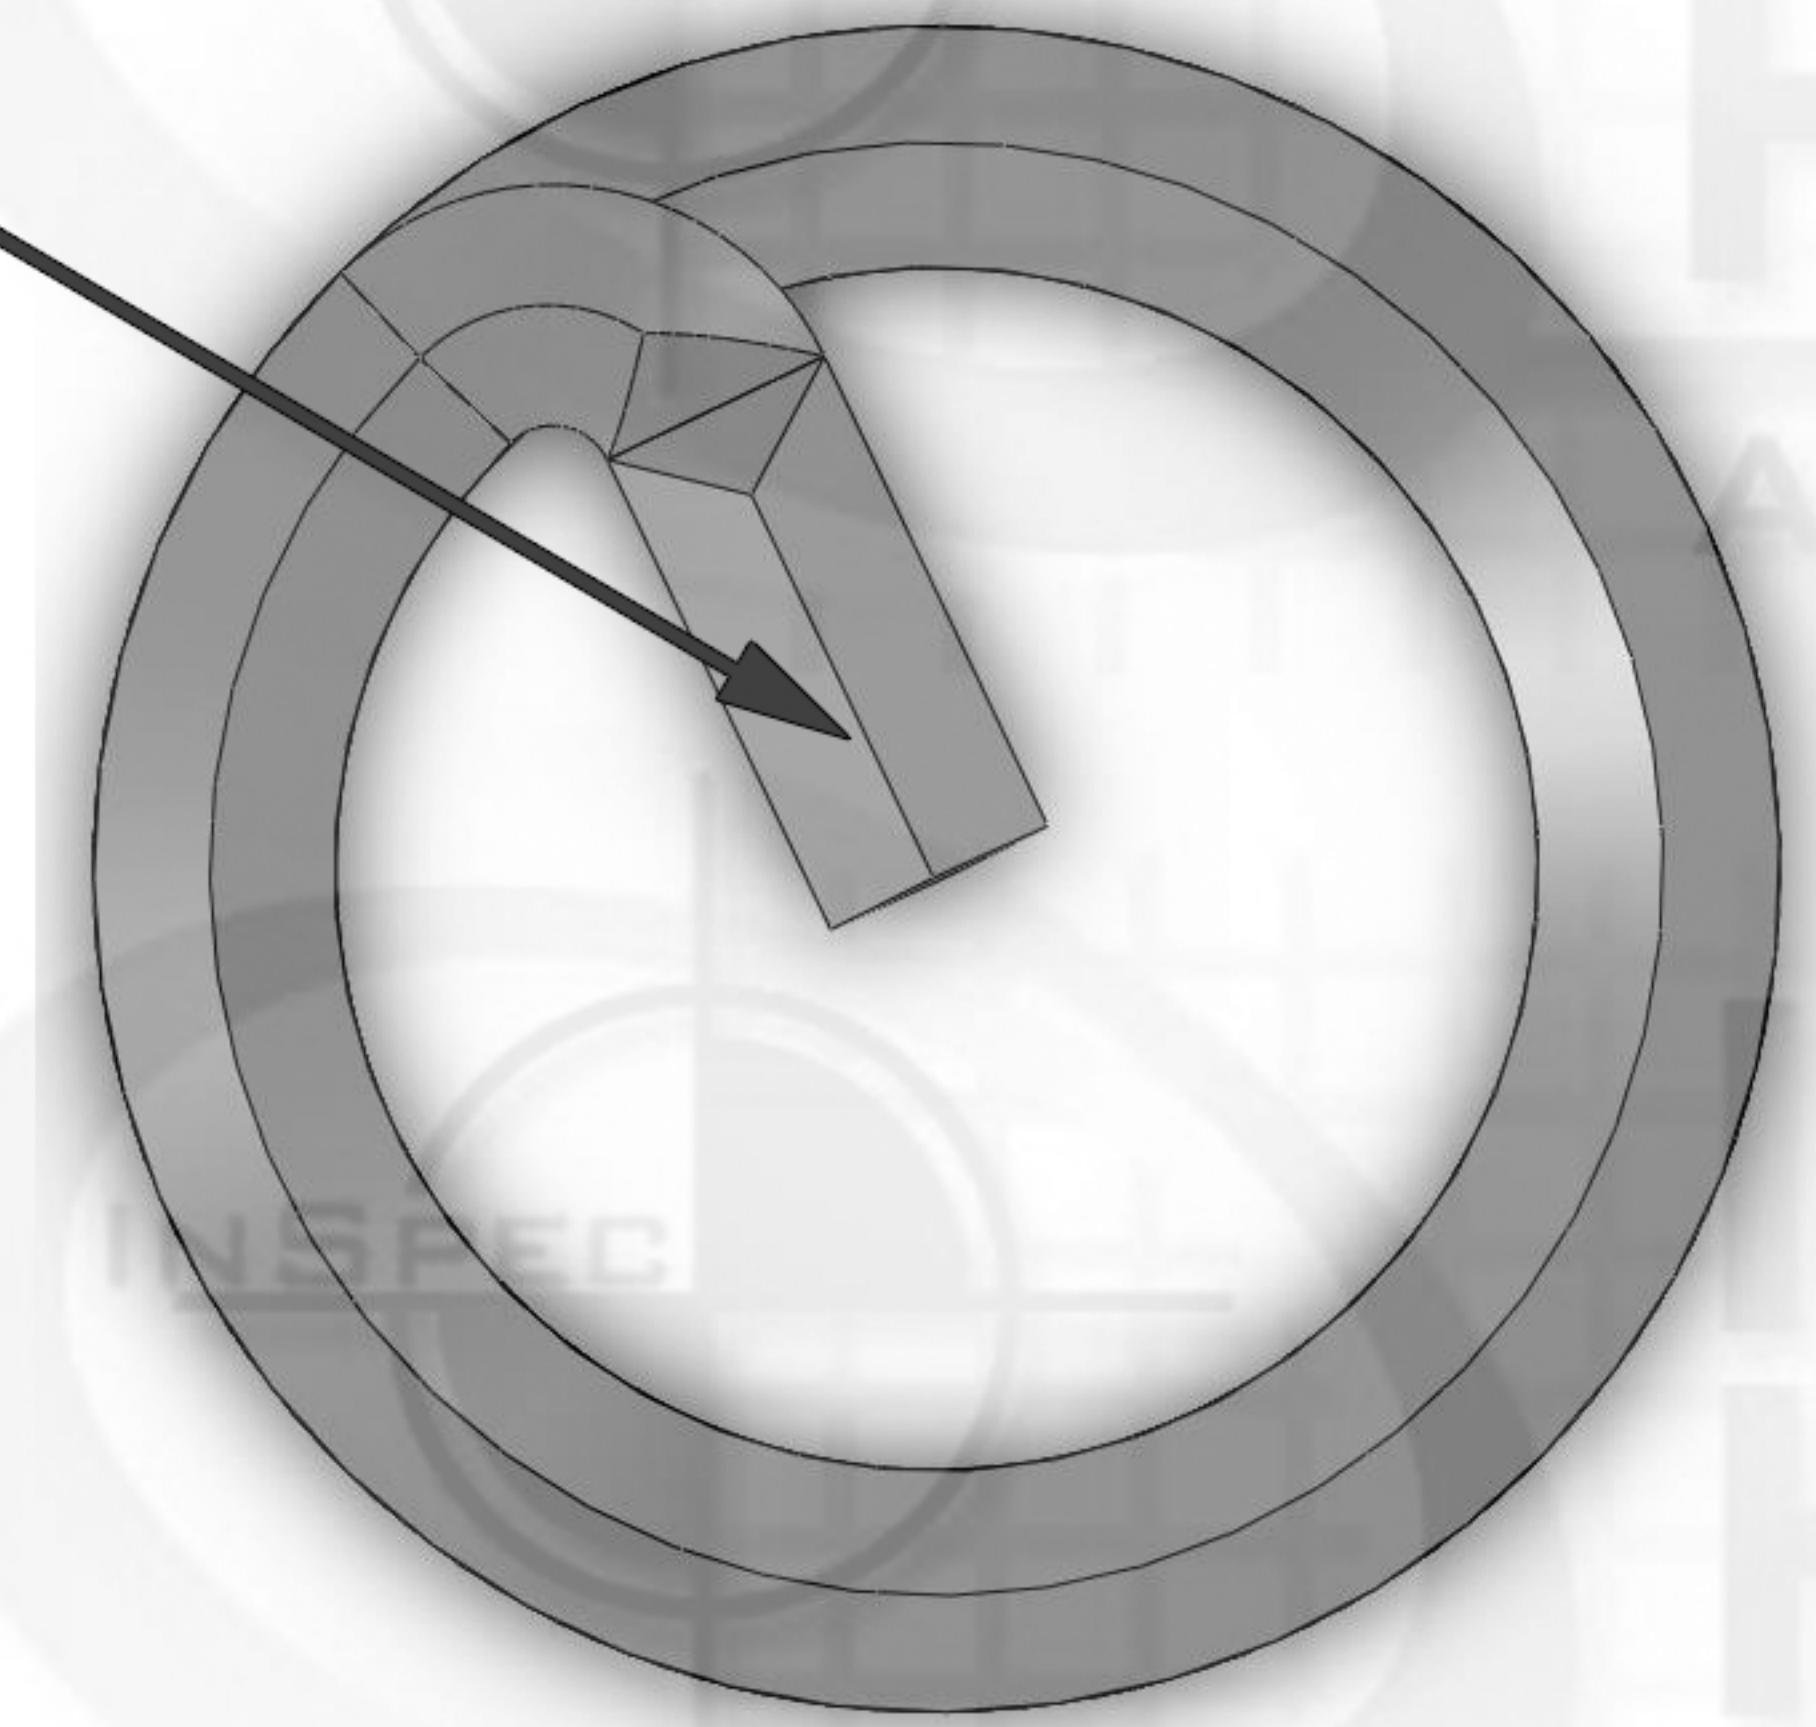


# WireSert Locking

Diameter Thread Pitch

1/2-20

Tang

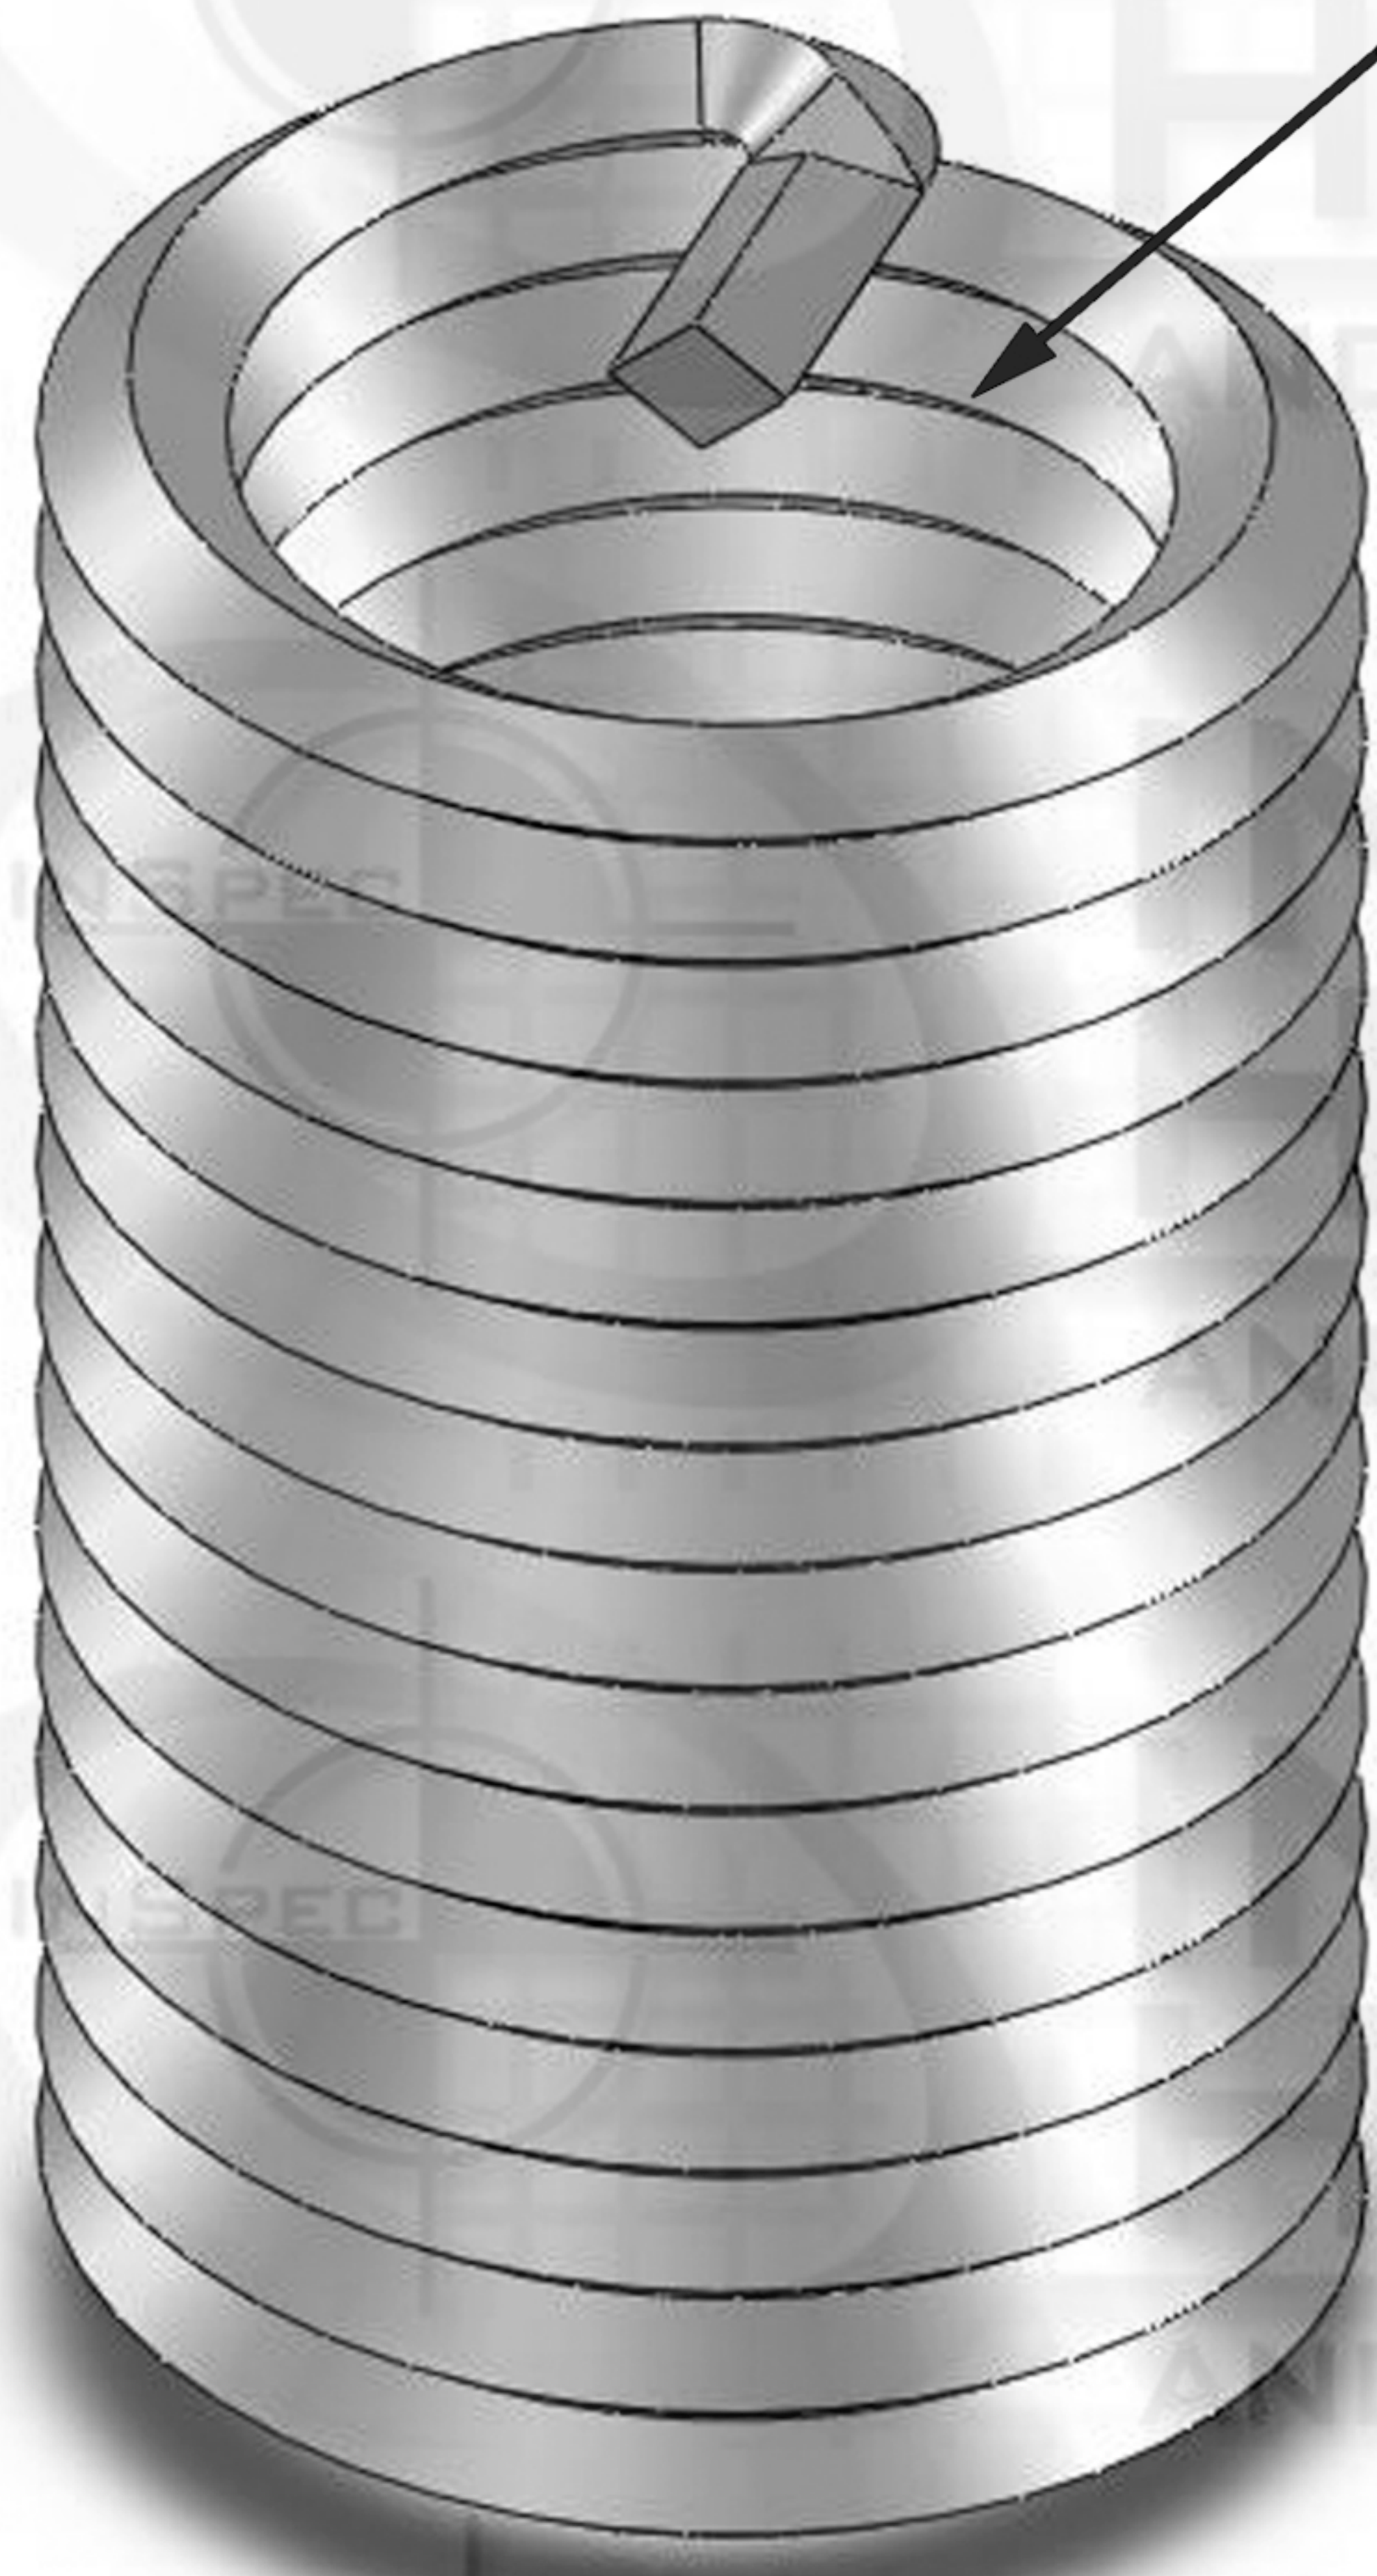

1.5

Suggested Drill Bit Size 0.5156 (33/64)



ZONE		REV.	REVISIONS DESCRIPTION	DATE	APPROVED

## PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

		MILITARY STANDARD MS21209-F8-30	DRAWN	NAME	DATE
			CHECKED		
			ENG APPR.		
		TH. STANDARD: ANSI/ASME ACRONYM: UNF ROTATION: Right-Hand MATERIAL FINISH Stainless Steel 18-8	MFG APPR.		
			Q.A.		
NEXT ASSY	USED ON	PART NUMBER 35L7C-C8K4-05030-1J	COMMENTS:		
APPLICATION		DO NOT SCALE DRAWING			



**INDUSTRIAL HARDWARE**  
AND SPECIALTIES INCORPORATED

17-B KENTUCKY AVENUE  
PATERSON, NEW JERSEY 07503  
TEL: 973-684-4010 FAX: 973-684-3095  
email: TechSupport@industrialhardware.com  
www.industrialhardware.com

SIZE	DWG. NO.	REV.
<b>A</b>		

SCALE: 1:8    WEIGHT: 0.93    SHEET 1 OF 1