




WireSert Locking

ZONE		REV.	REVISIONS DESCRIPTION	DATE	APPROVED

Diameter Thread Pitch

1-3/8-12

Tang

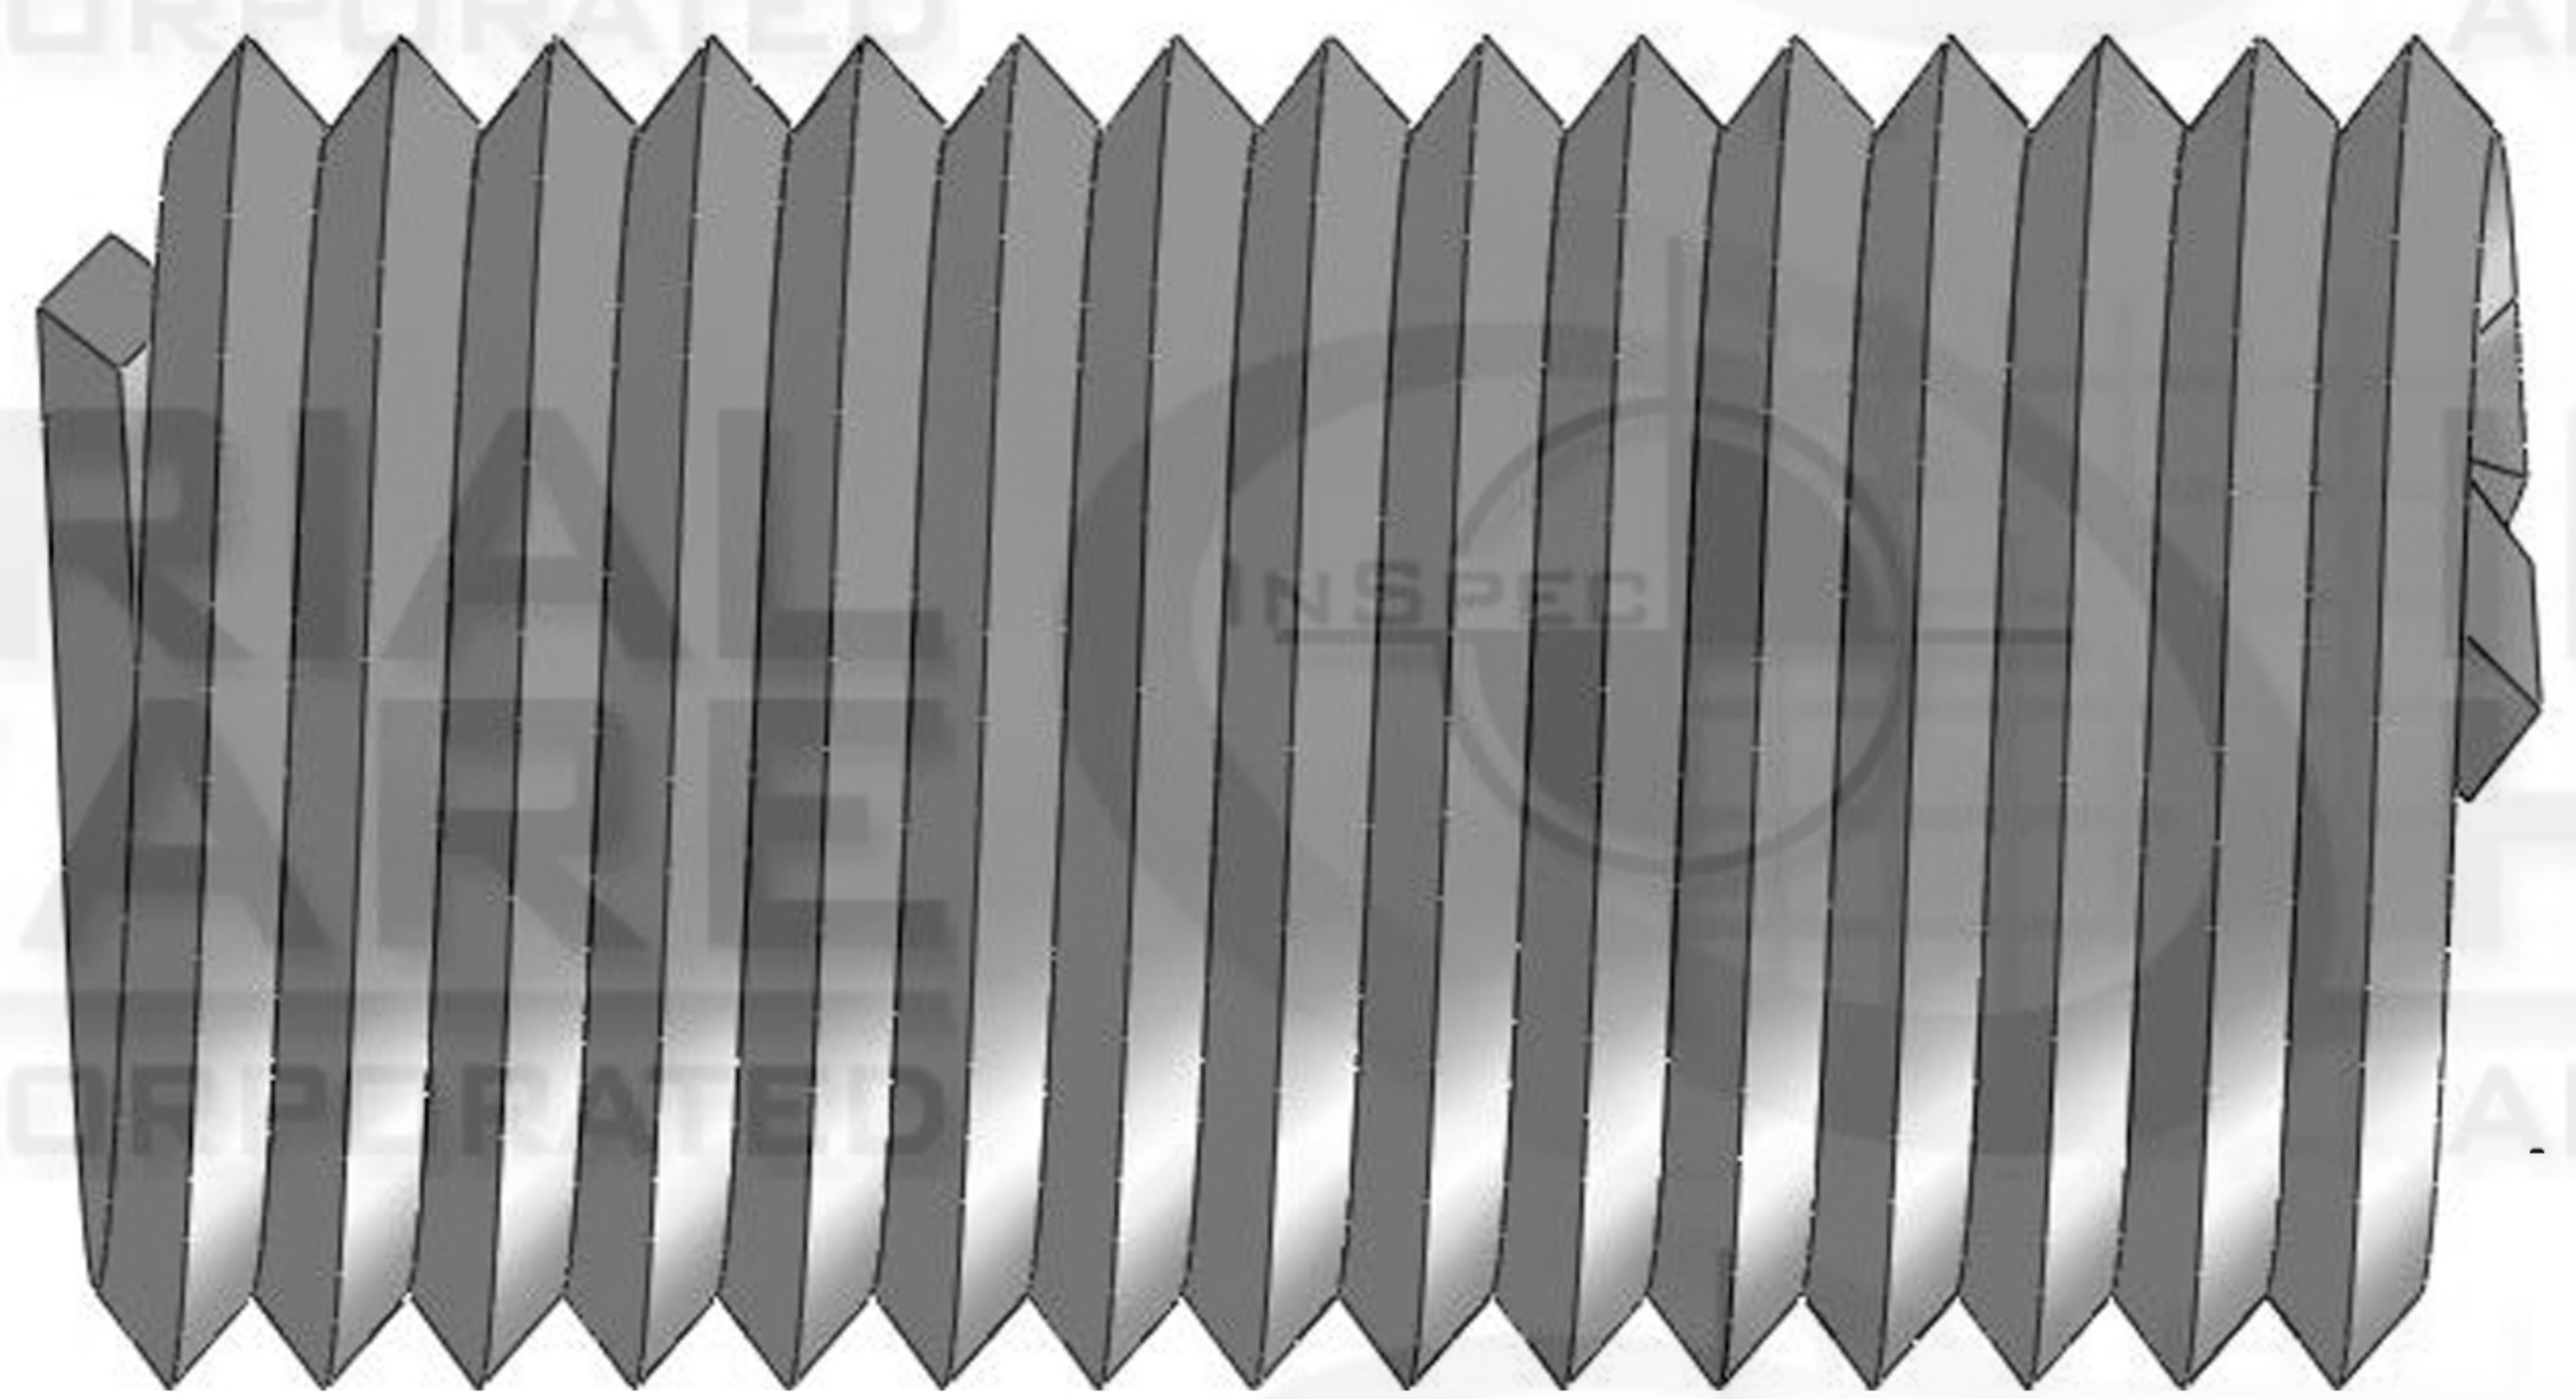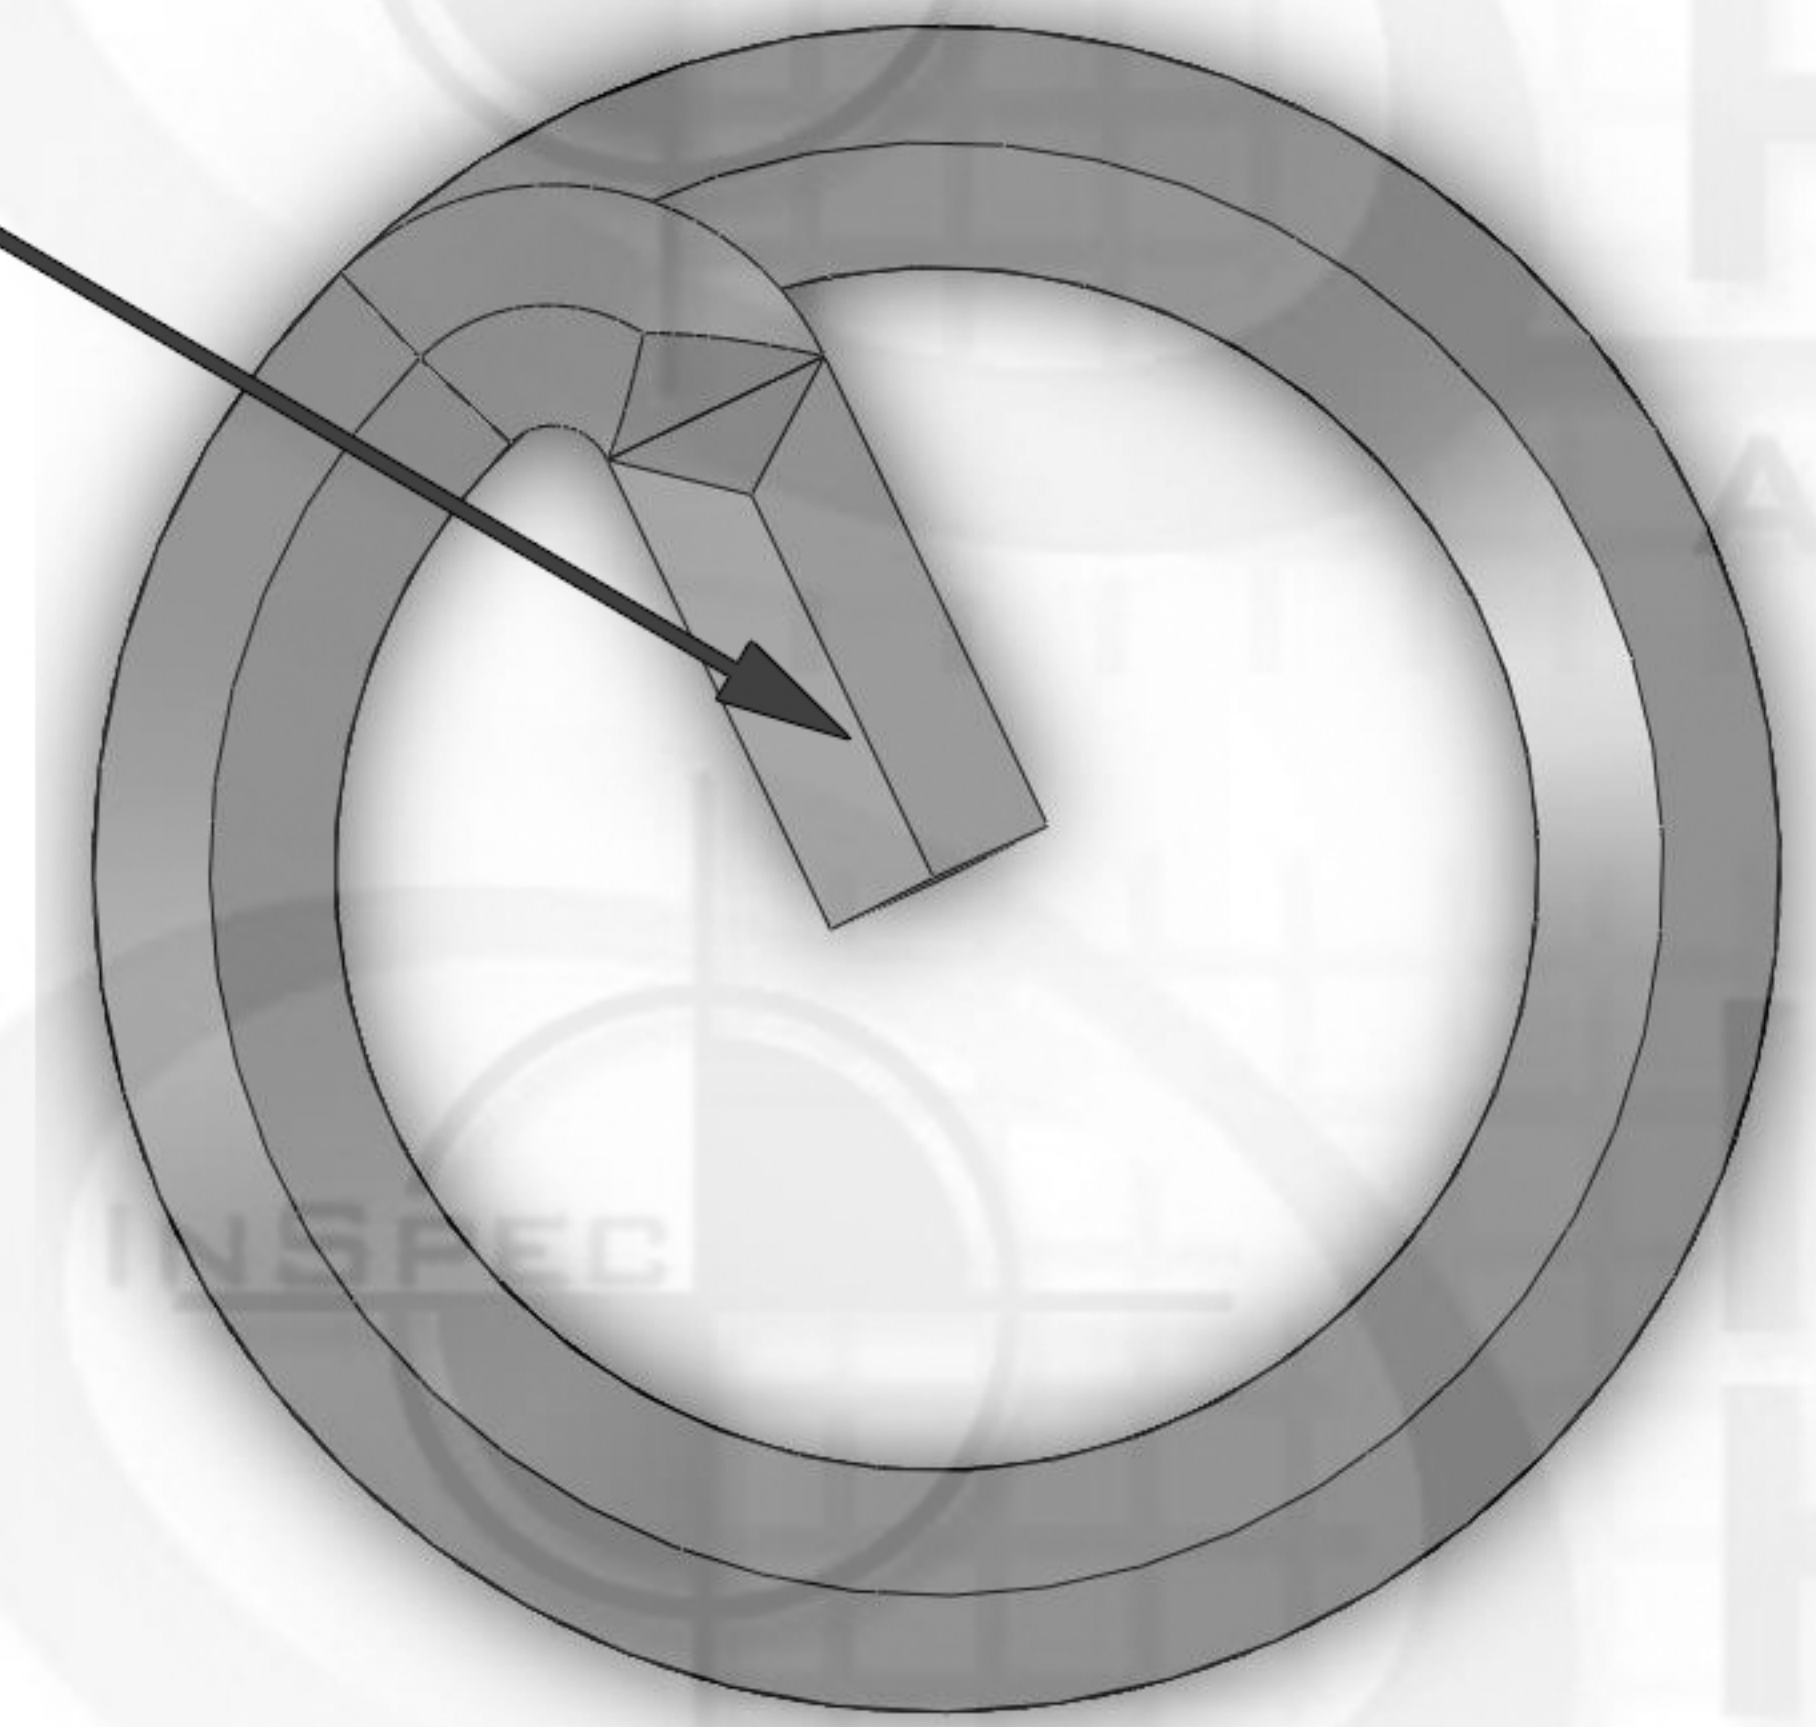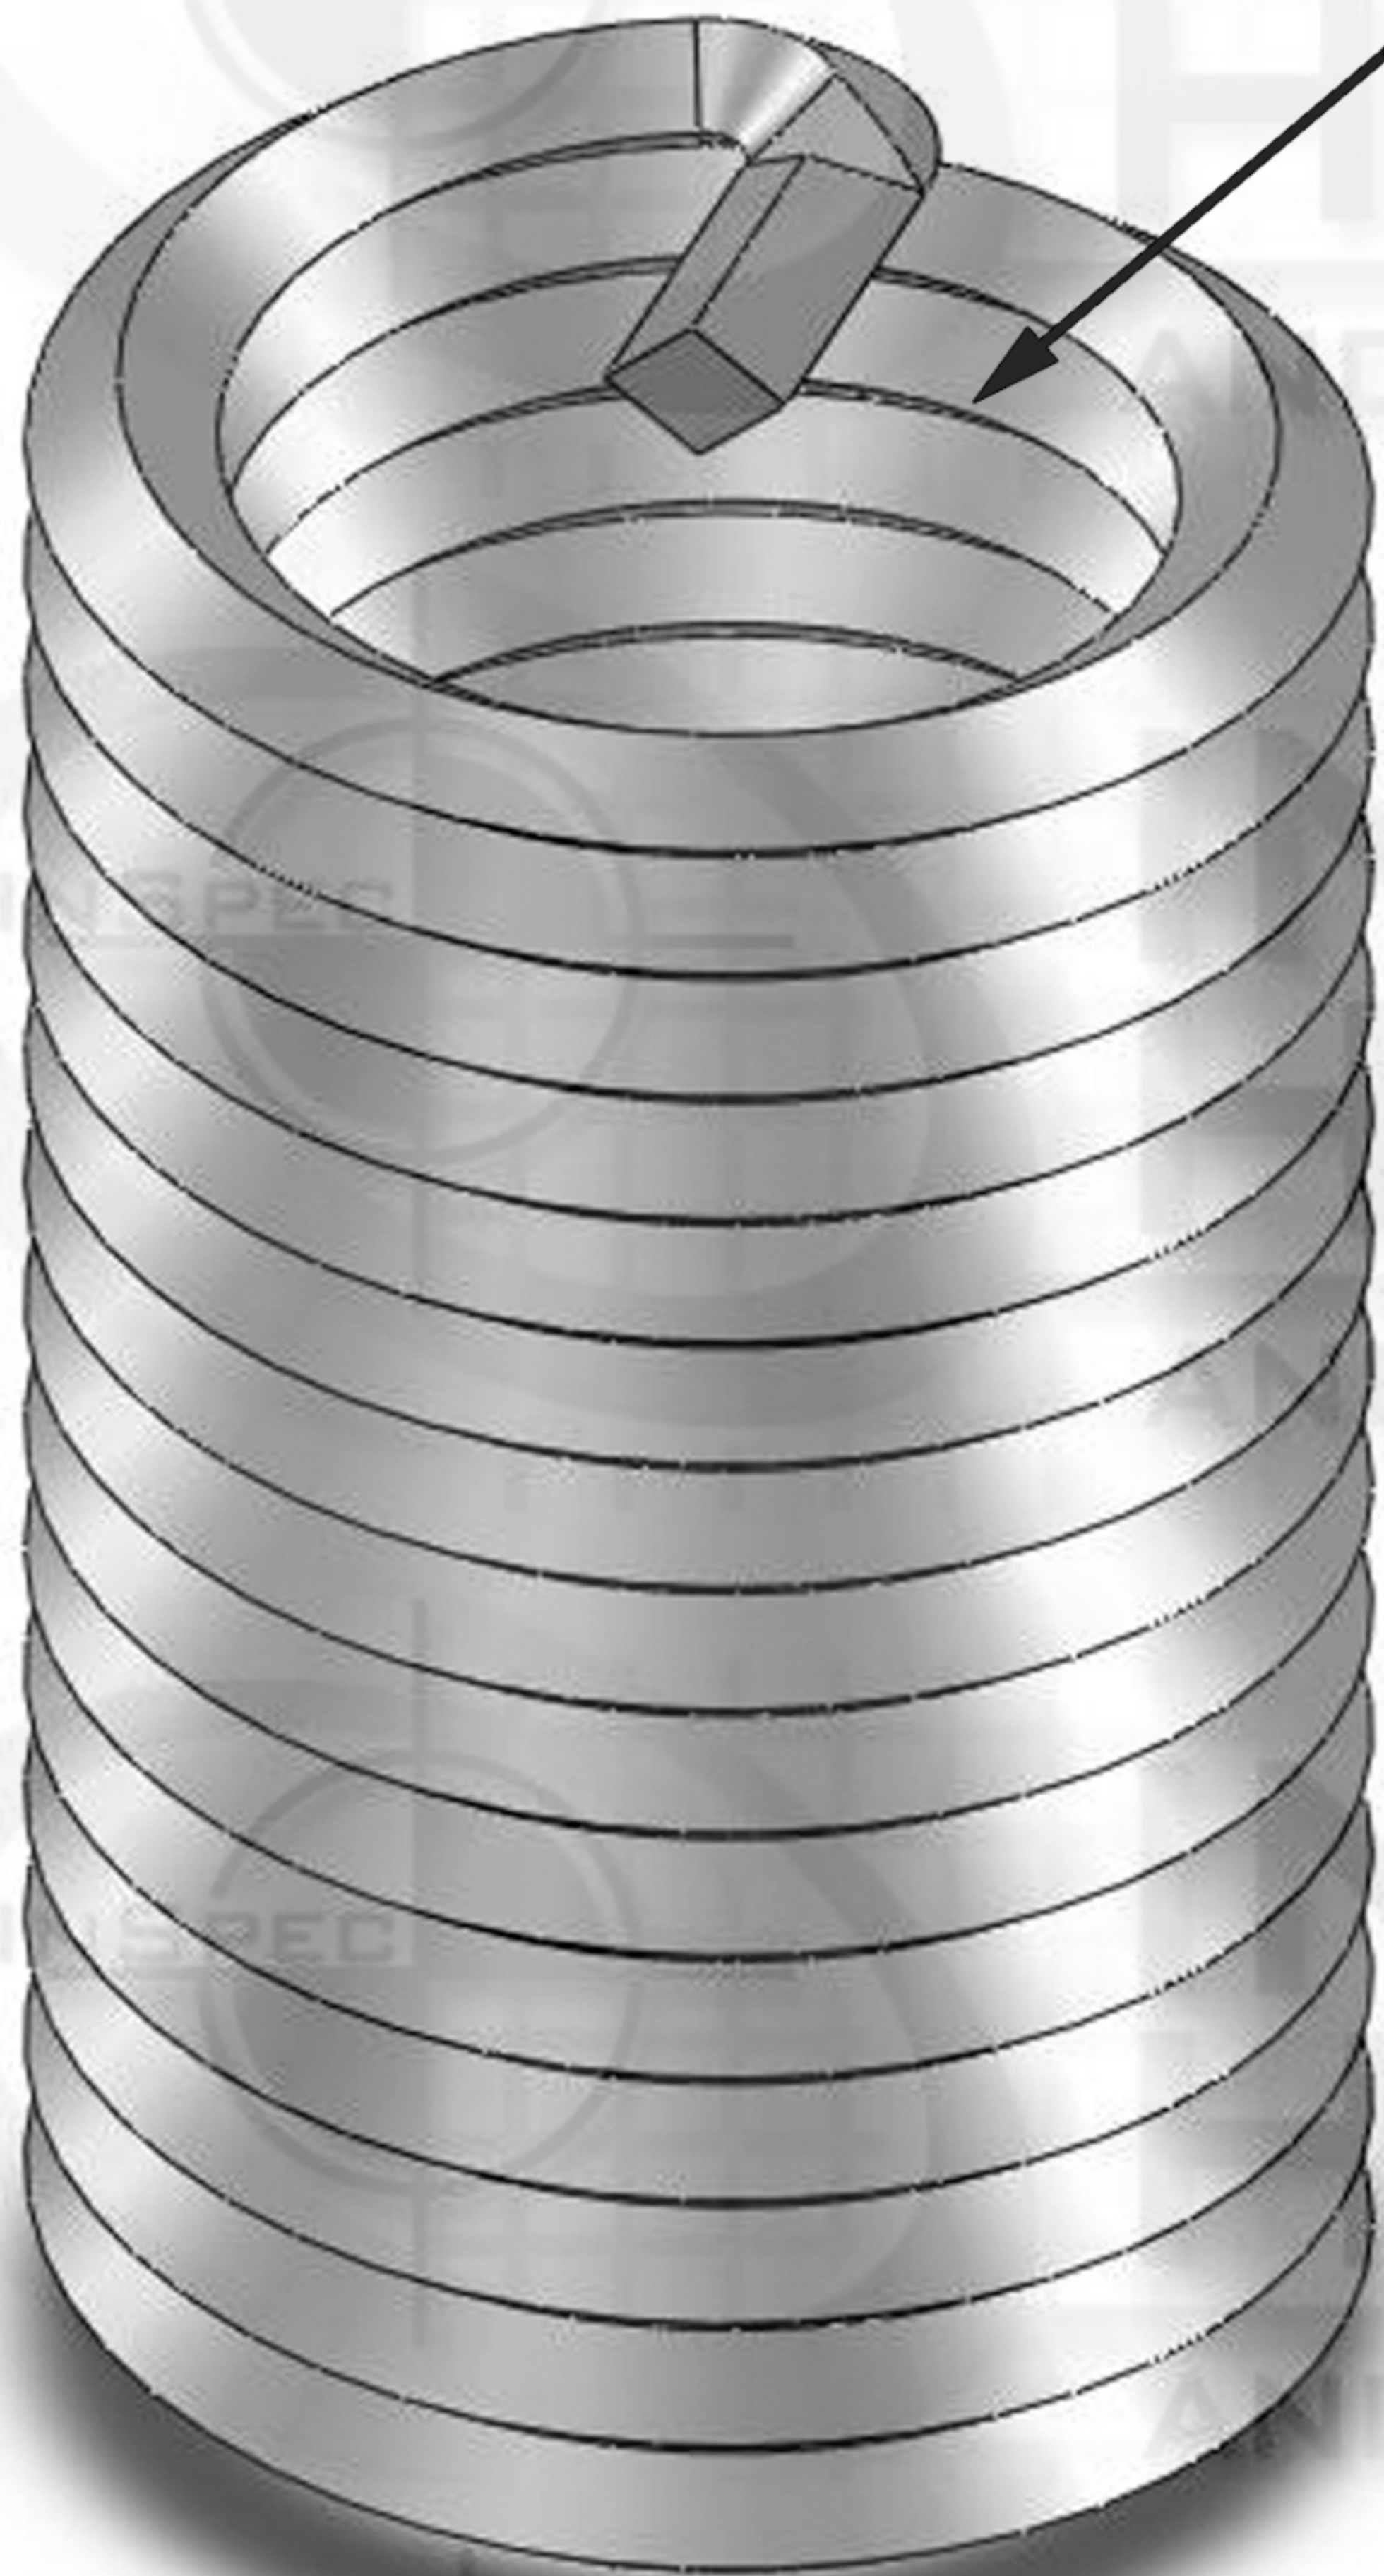

Suggested Drill Bit Size **1.4063 (1-13/32)**



2.062

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

		MILITARY STANDARD MS21209-F2215	DRAWN	NAME	DATE
			CHECKED		
			ENG APPR.		
		TH. STANDARD: ANSI/ASME ACRONYM: UNF ROTATION: Right-Hand MATERIAL FINISH Stainless Steel 18-8	MFG APPR.		
			Q.A.		
NEXT ASSY	USED ON	PART NUMBER 35L7C-C8K4-13715-05	COMMENTS:		
APPLICATION		DO NOT SCALE DRAWING			



INDUSTRIAL HARDWARE
AND SPECIALTIES INCORPORATED

**17-B KENTUCKY AVENUE
PATERSON, NEW JERSEY 07503
TEL: 973-684-4010 FAX: 973-684-3095
email: TechSupport@industrialhardware.com
www.industrialhardware.com**

SIZE	DWG. NO.	REV.
A		

SCALE: 1:8 WEIGHT: 0.61 SHEET 1 OF 1