



WireSert Locking

ZONE		REV.	REVISIONS DESCRIPTION	DATE	APPROVED

Diameter Thread Pitch

1-1/2-12

Tang

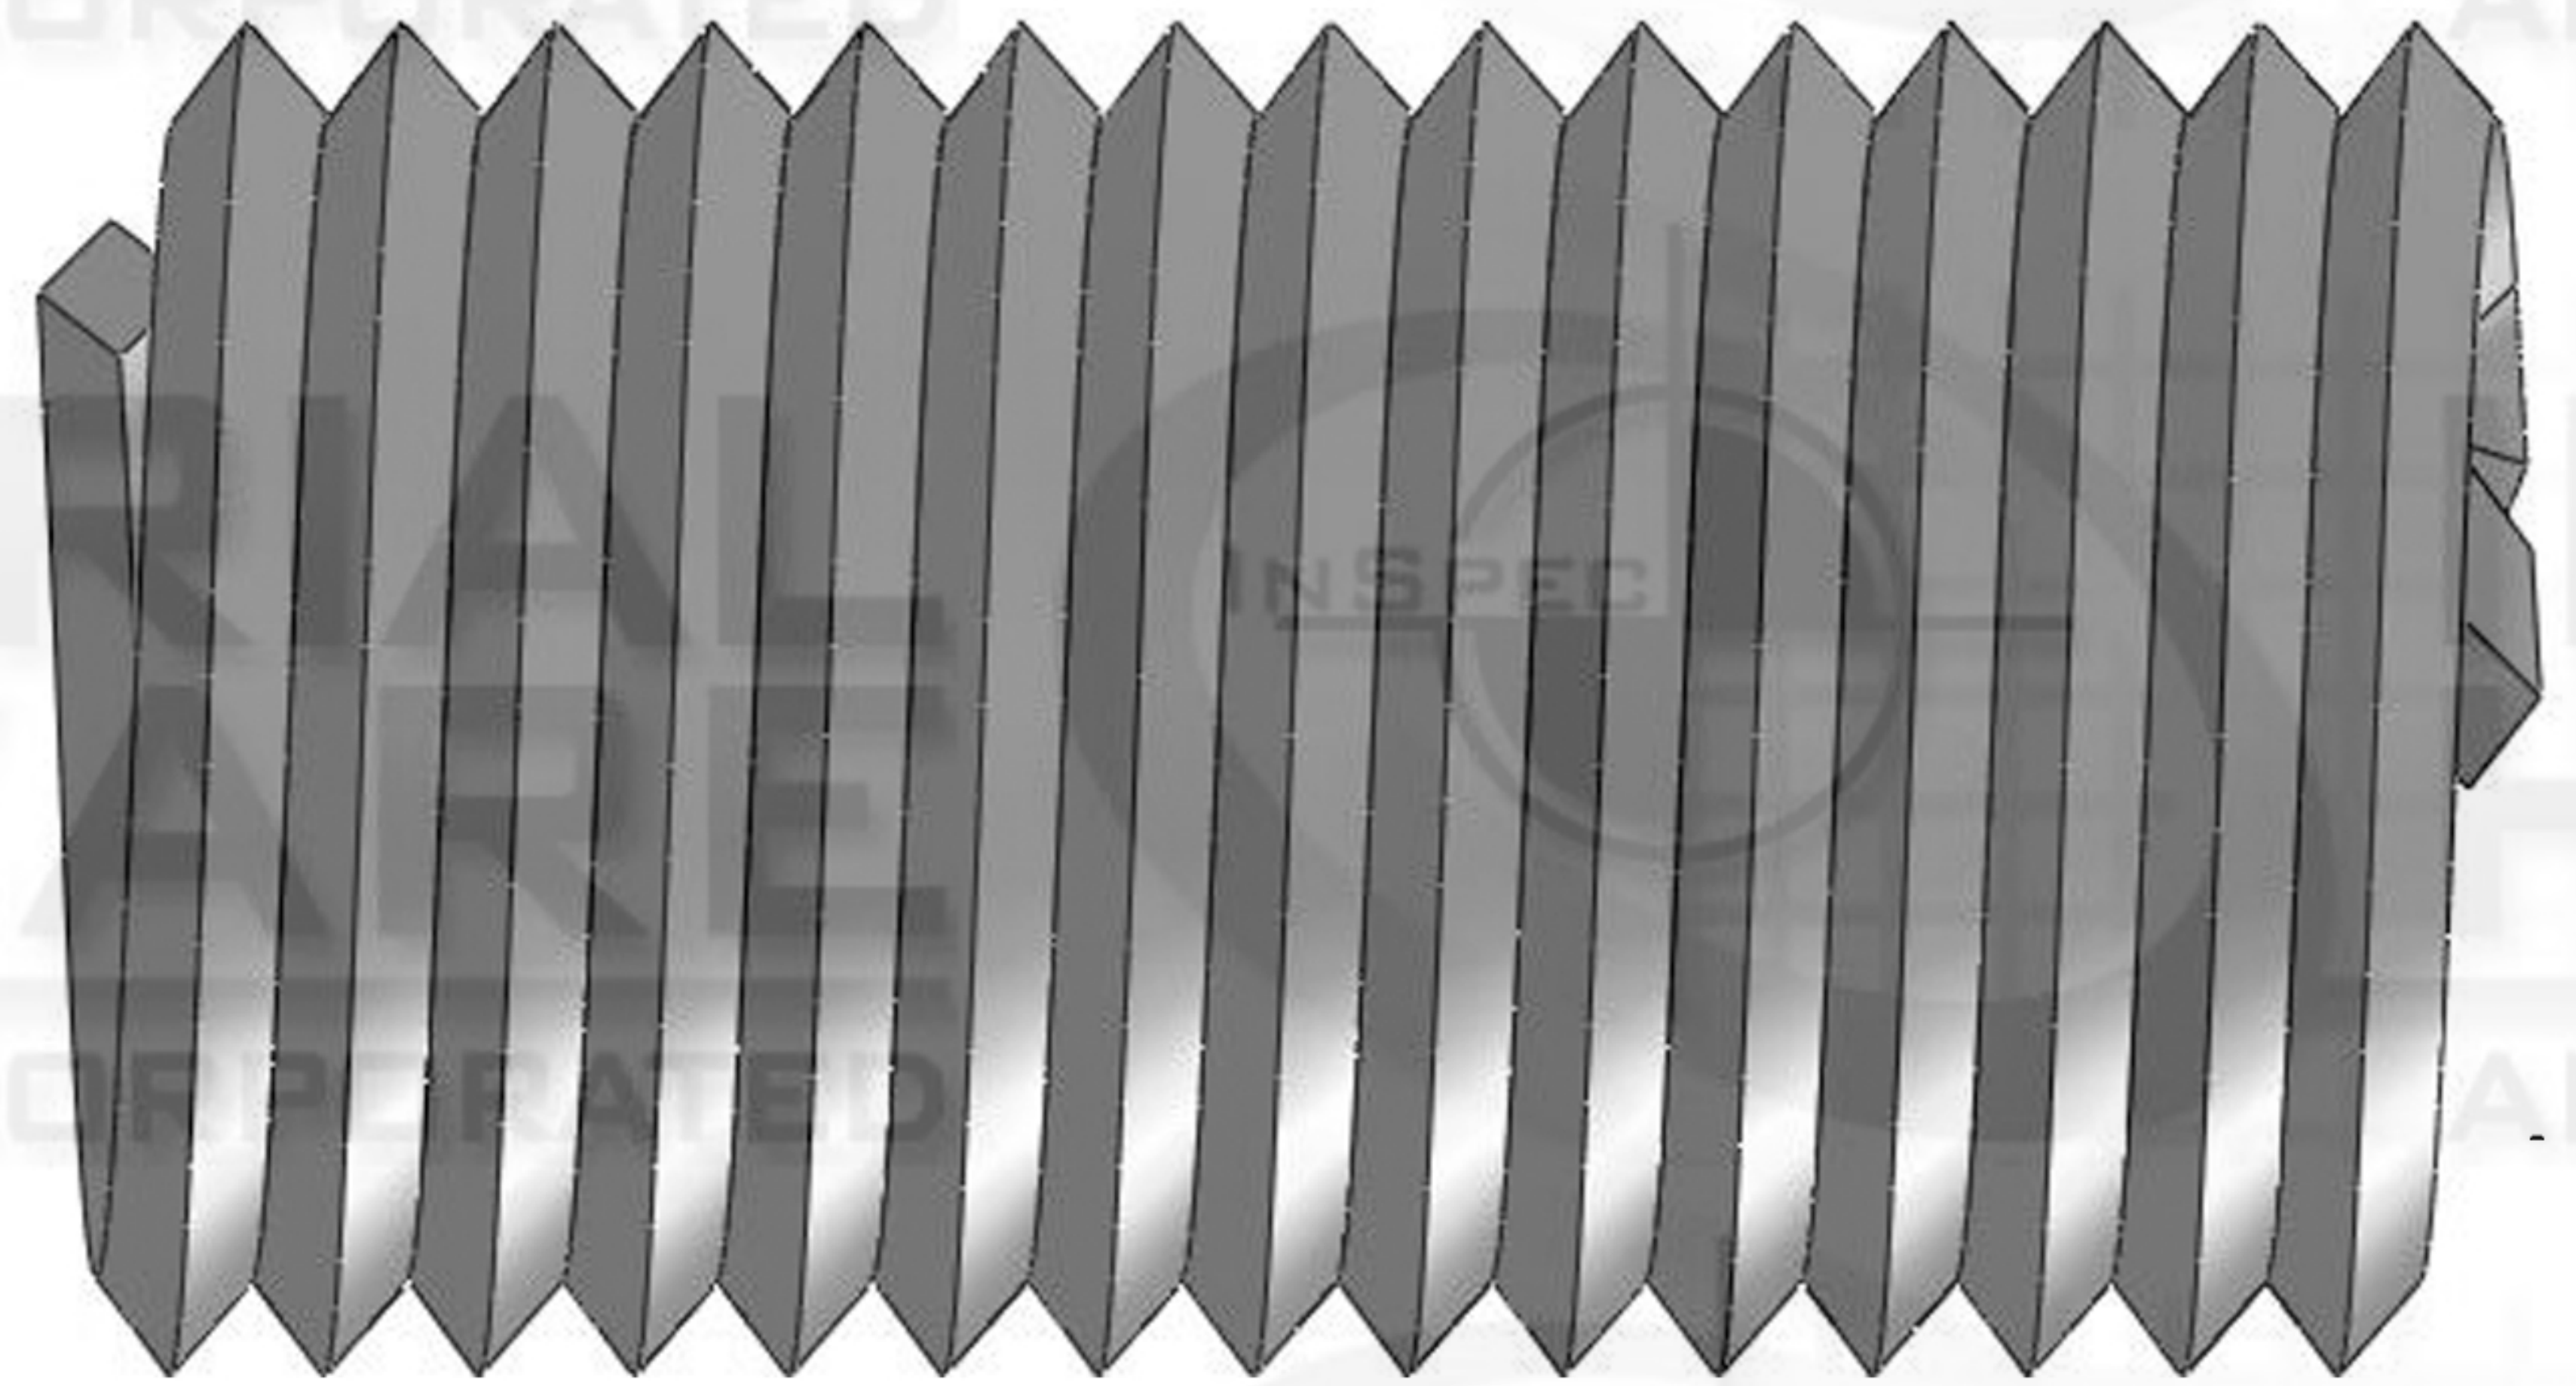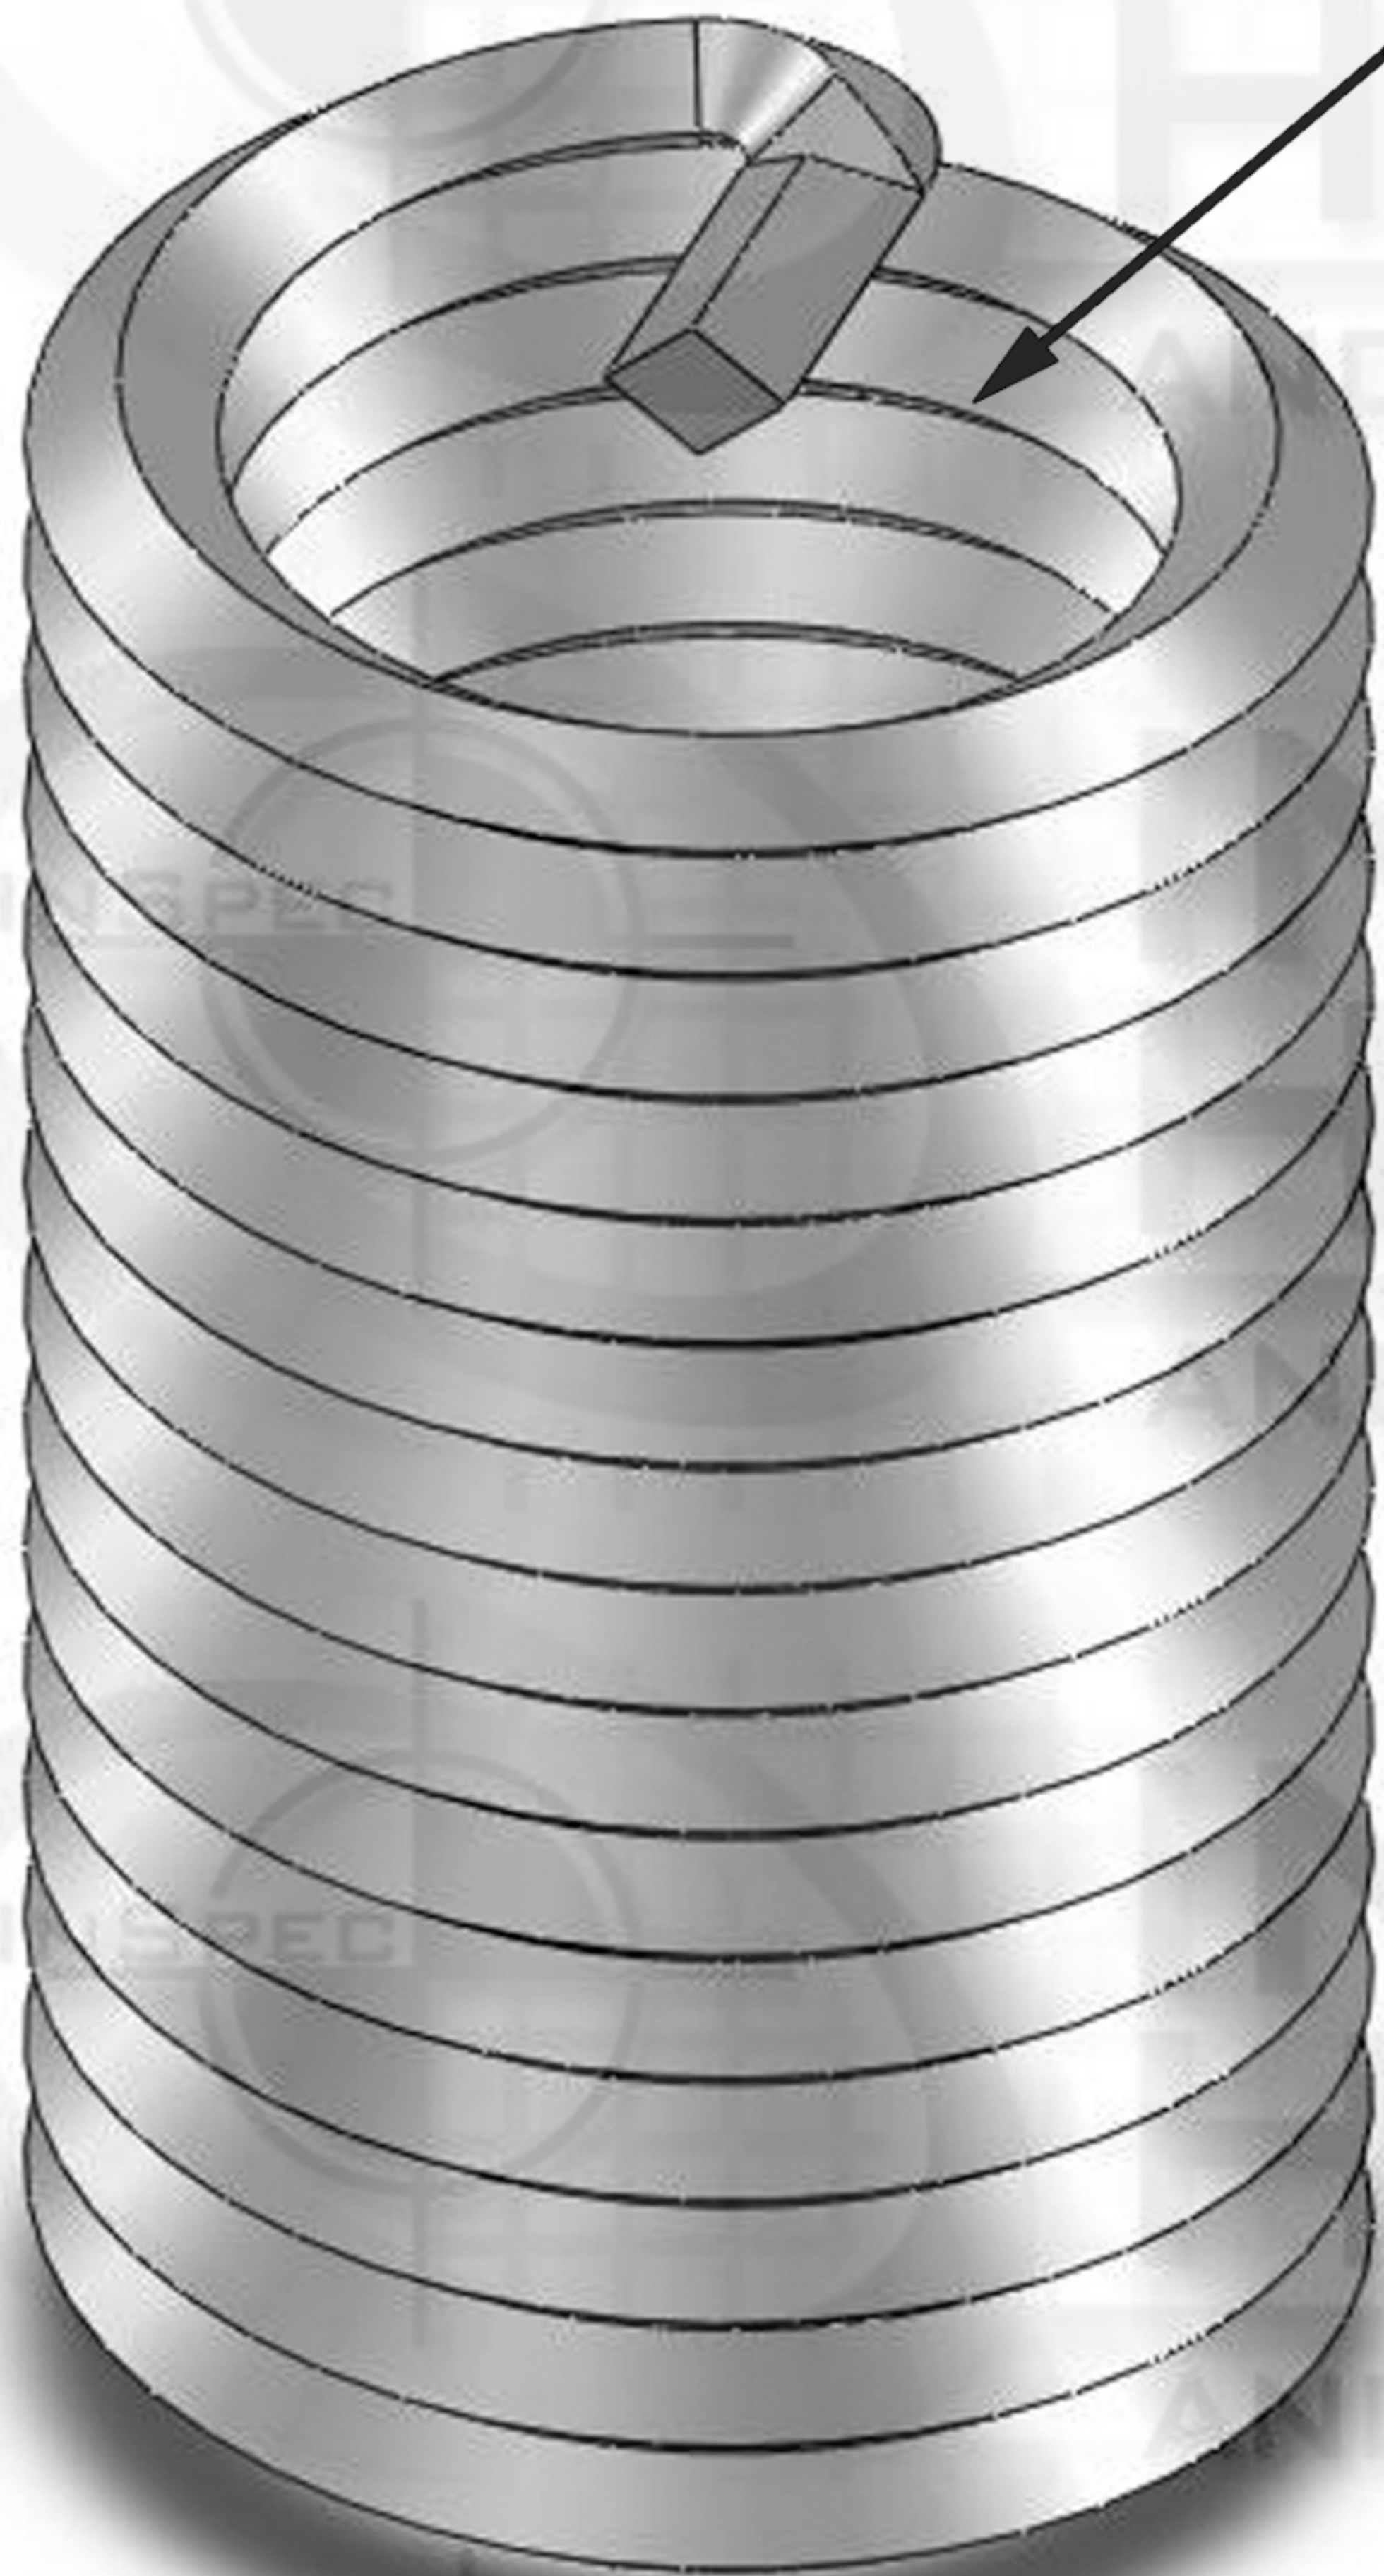

Suggested Drill Bit Size

1.5313 (1-17/32)



2.25

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

		MILITARY STANDARD MS21209-F2415	DRAWN	NAME	DATE
			CHECKED		
			ENG APPR.		
			MFG APPR.		
			Q.A.		
			COMMENTS:		
NEXT ASSY	USED ON	TH. STANDARD: ANSI/ASME ACRONYM: UNF ROTATION: Right-Hand MATERIAL FINISH Stainless Steel 18-8			
		PART NUMBER 35L7C-C8K4-15015-05			
APPLICATION		DO NOT SCALE DRAWING			



**17-B KENTUCKY AVENUE
PATERSON, NEW JERSEY 07503
TEL: 973-684-4010 FAX: 973-684-3095
email: TechSupport@industrialhardware.com
www.industrialhardware.com**

SIZE	DWG. NO.	REV.
A		
SCALE: 1:8	WEIGHT: 0.71	SHEET 1 OF 1