# WireSert Locking

| | | REVISIONS | | |
|---|---|---|---|---|
| ZONE | REV. | DESCRIPTION | DATE | APPROVED |
| | | | | |
| | | | | |

Diameter Thread Pitch

1-1/8-8

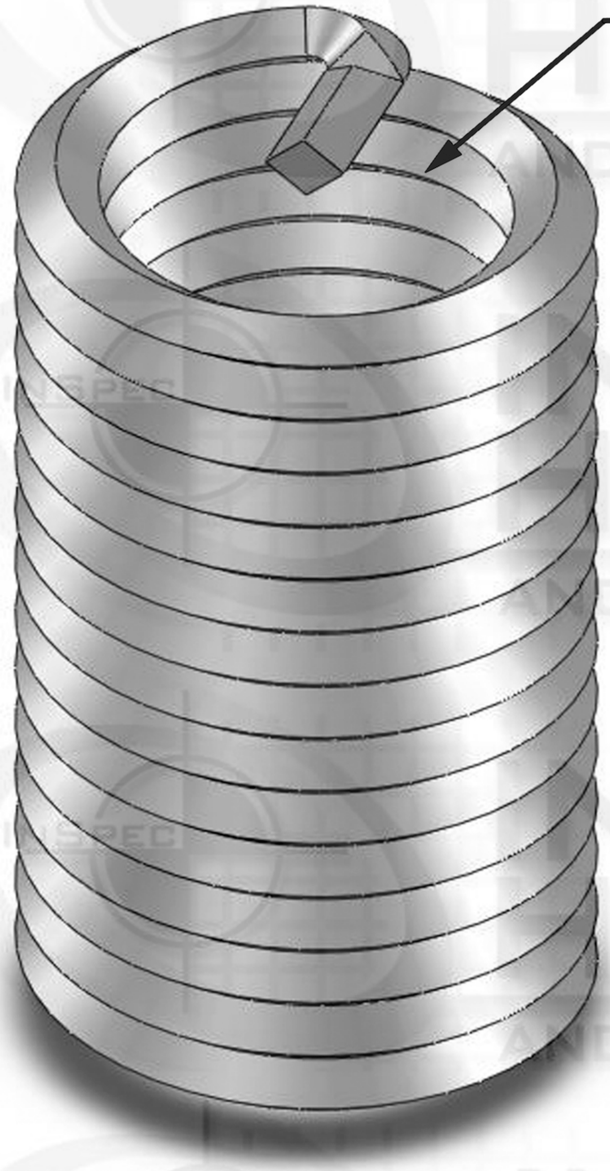

Tang

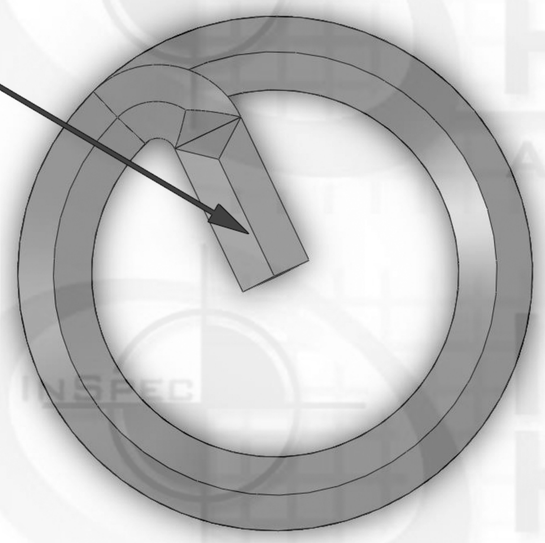

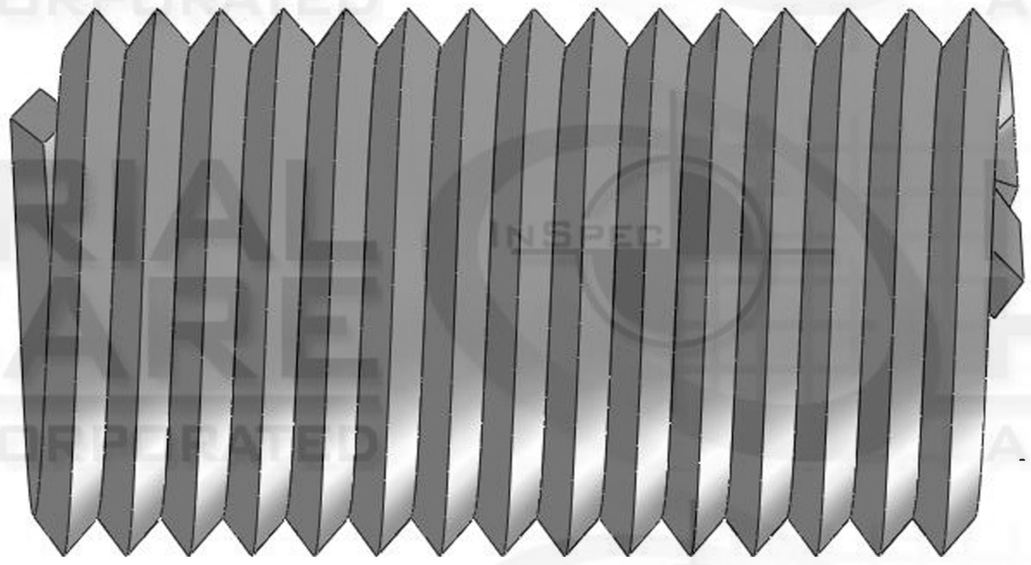

1.688

Suggested Drill Bit Size

1.1406 (1-9/64)

## PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

| | |
|---|---|
| NEXT ASSY | USED ON |
| APPLICATION | |

TH. STANDARD: ANSI/ASME
ACRONYM: 8UN
ROTATION: Right-Hand

MATERIAL FINISH
Stainless Steel 18-8

PART NUMBER
35L7C-C8KP-112

DO NOT SCALE DRAWING

| | NAME | DATE |
|---|---|---|
| DRAWN | | |
| CHECKED | | |
| ENG APPR. | | |
| MFG APPR. | | |
| Q.A. | | |

COMMENTS:

INDUSTRIAL HARDWARE AND SPECIALTIES INCORPORATED

**17-B KENTUCKY AVENUE**
**PATERSON, NEW JERSEY 07503**
**TEL: 973-684-4010 FAX: 973-684-3095**
**email: TechSupport@industrialhardware.com**
**www.industrialhardware.com**

| SIZE | DWG. NO. | REV. |
|---|---|---|
| A | | |

| SCALE:1:8 | WEIGHT: 0.1 | SHEET 1 OF 1 |
|---|---|---|