
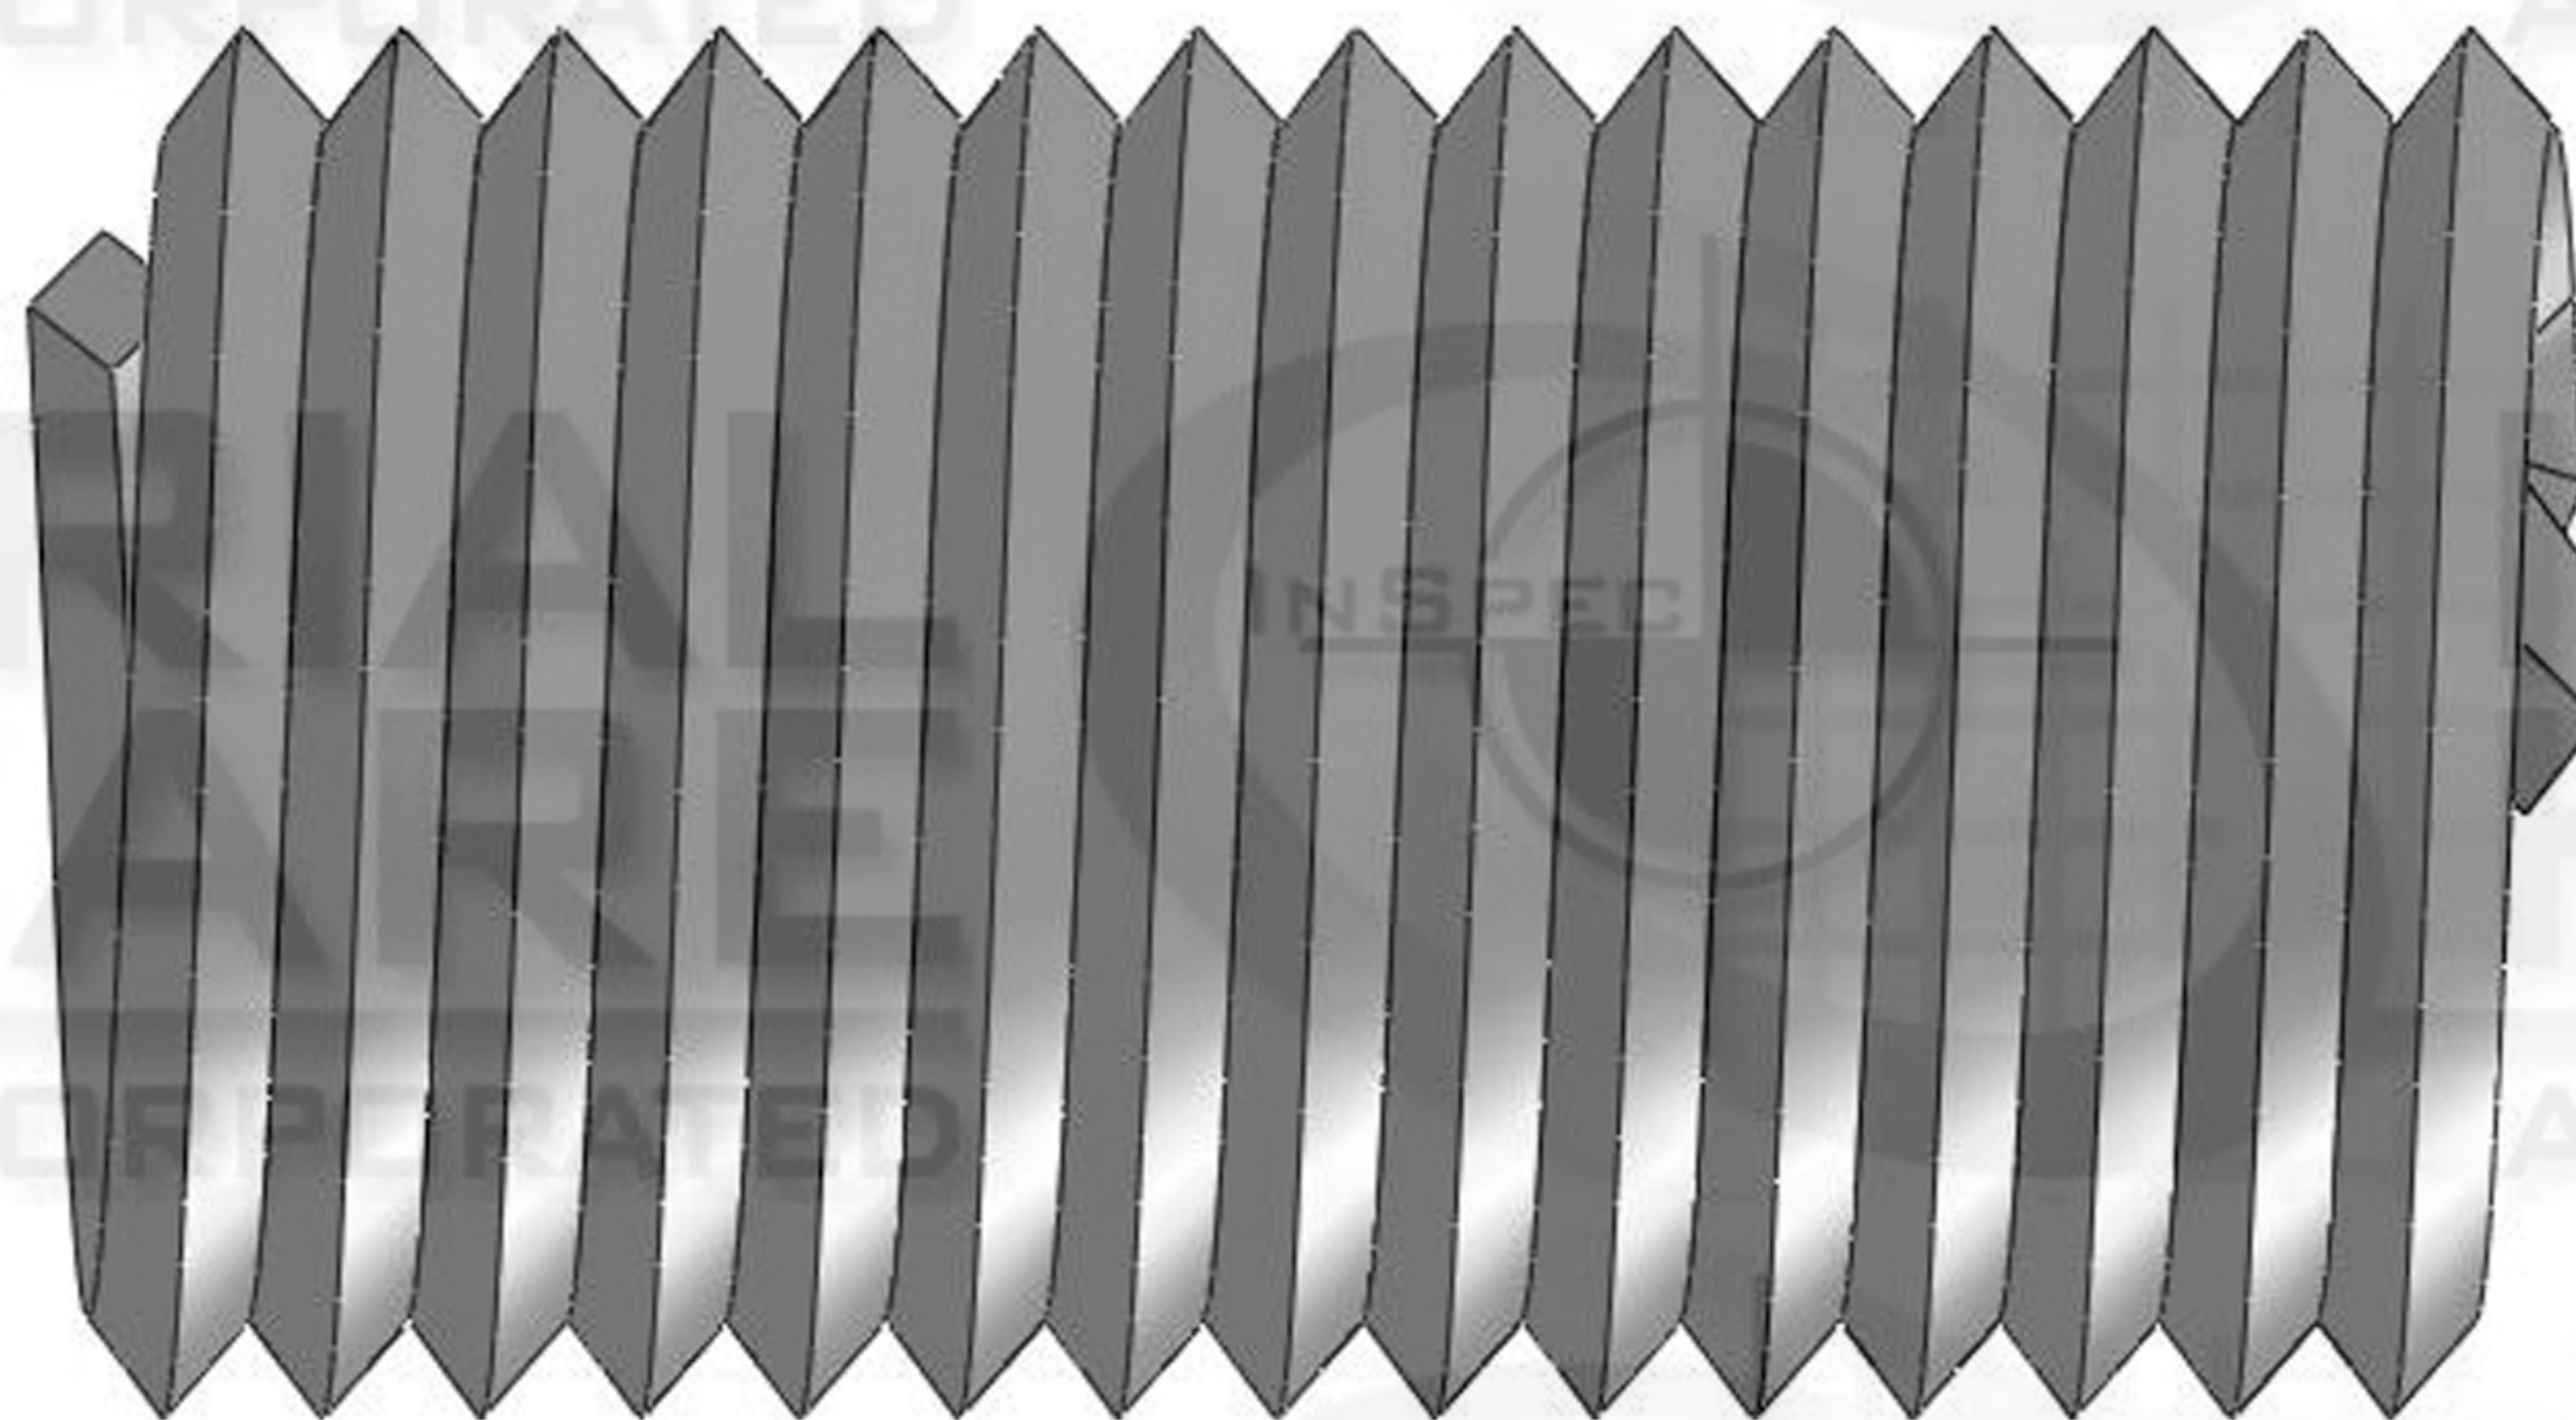
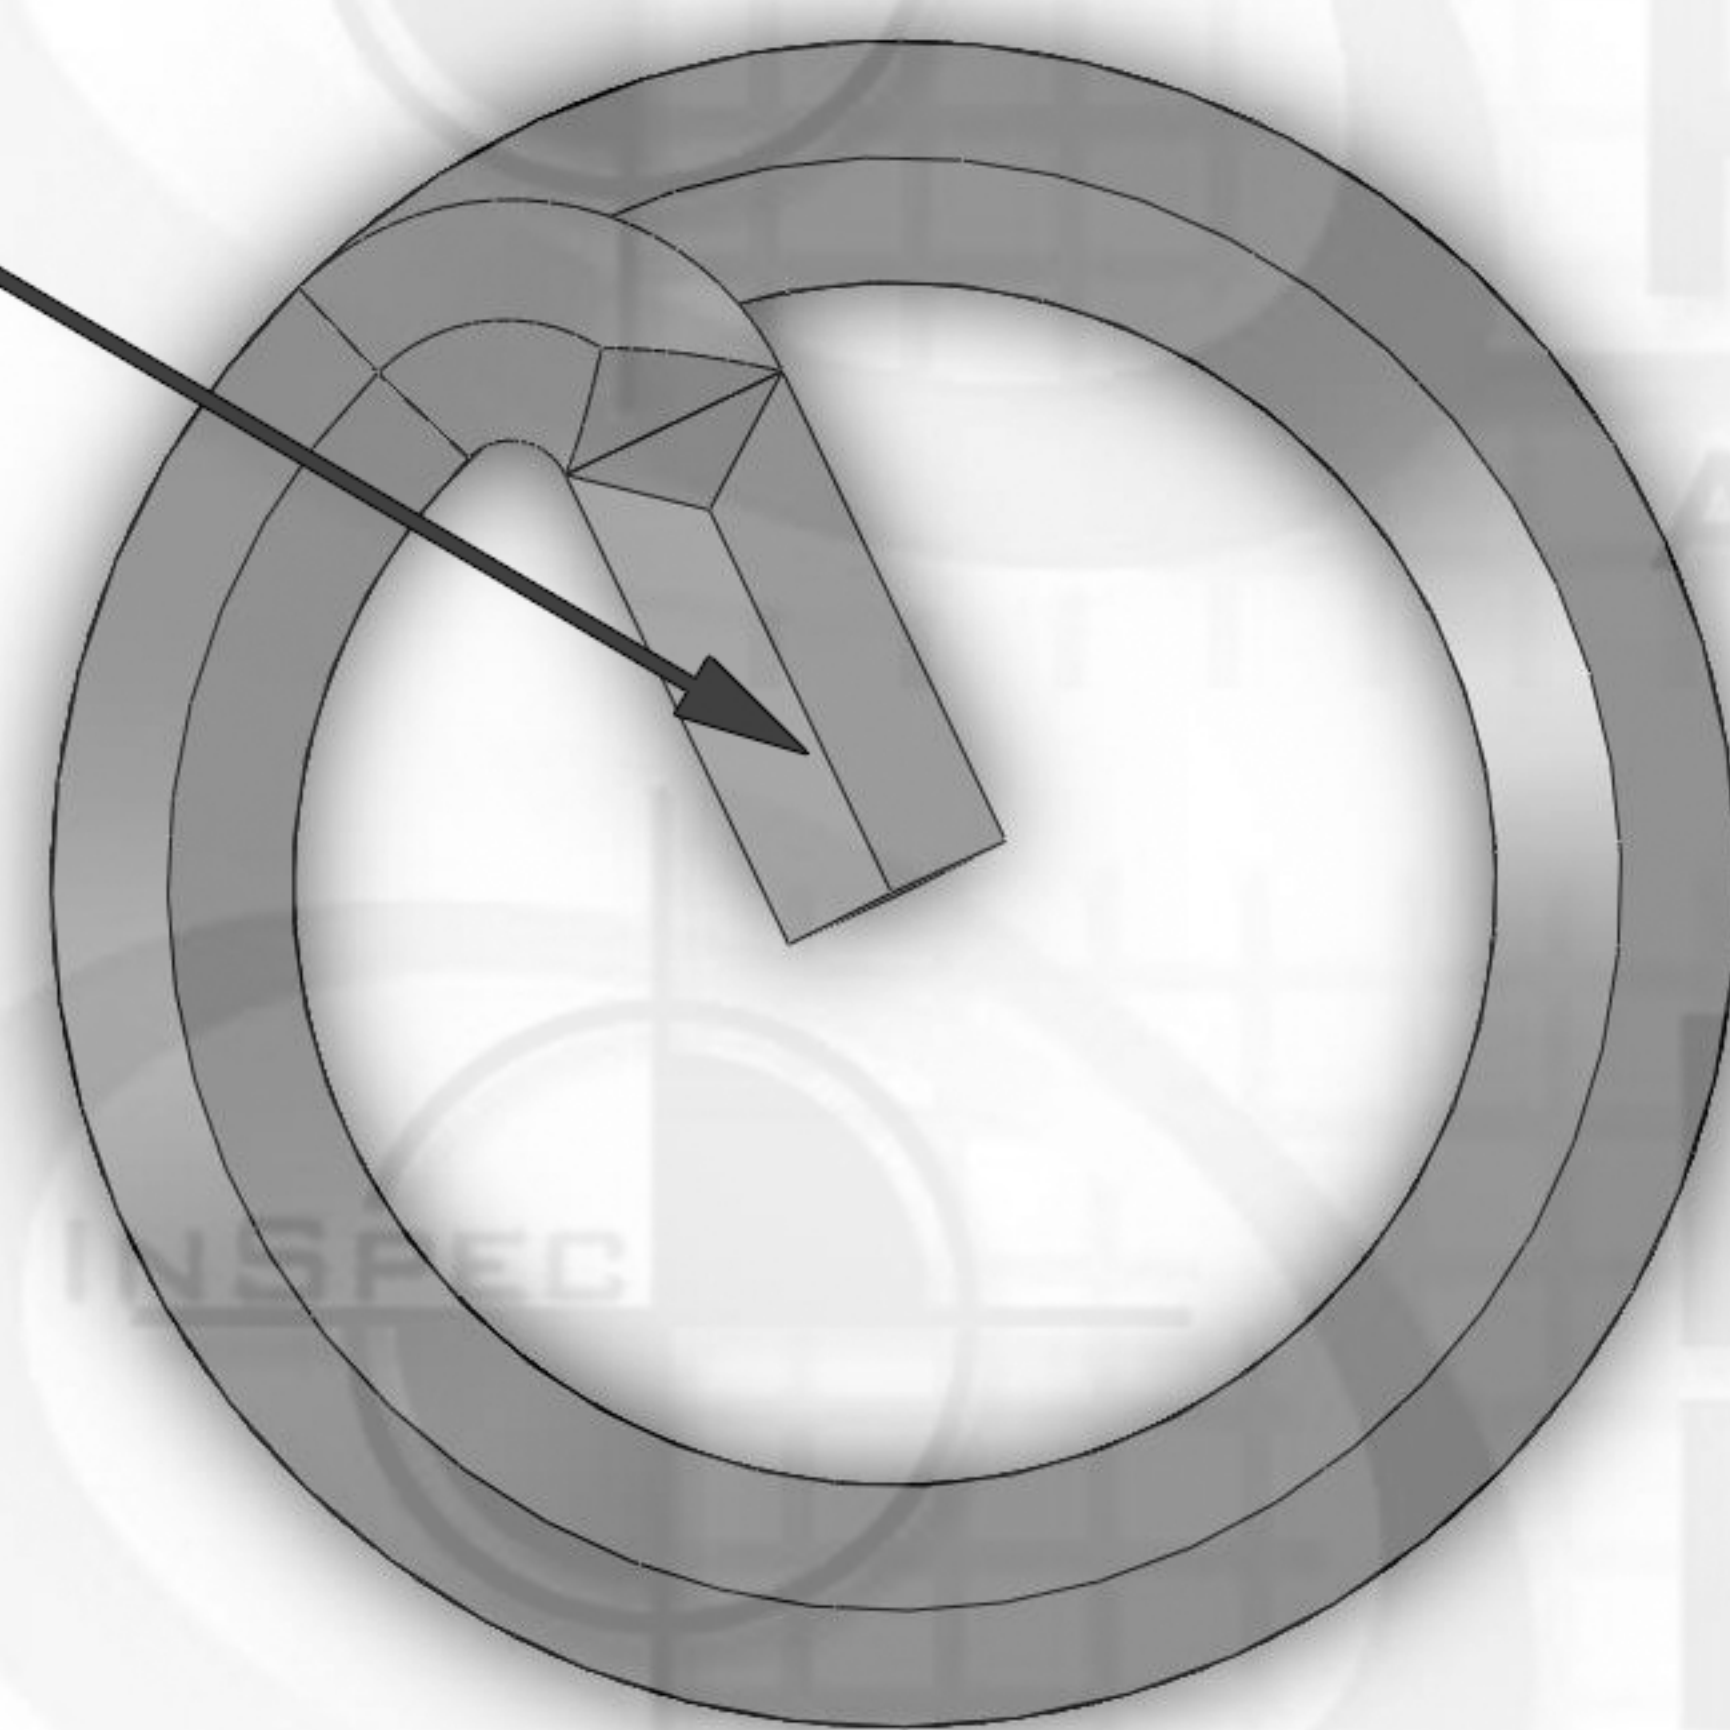


WireSert Locking

Diameter Thread Pitch

1-5/8-8

Tang

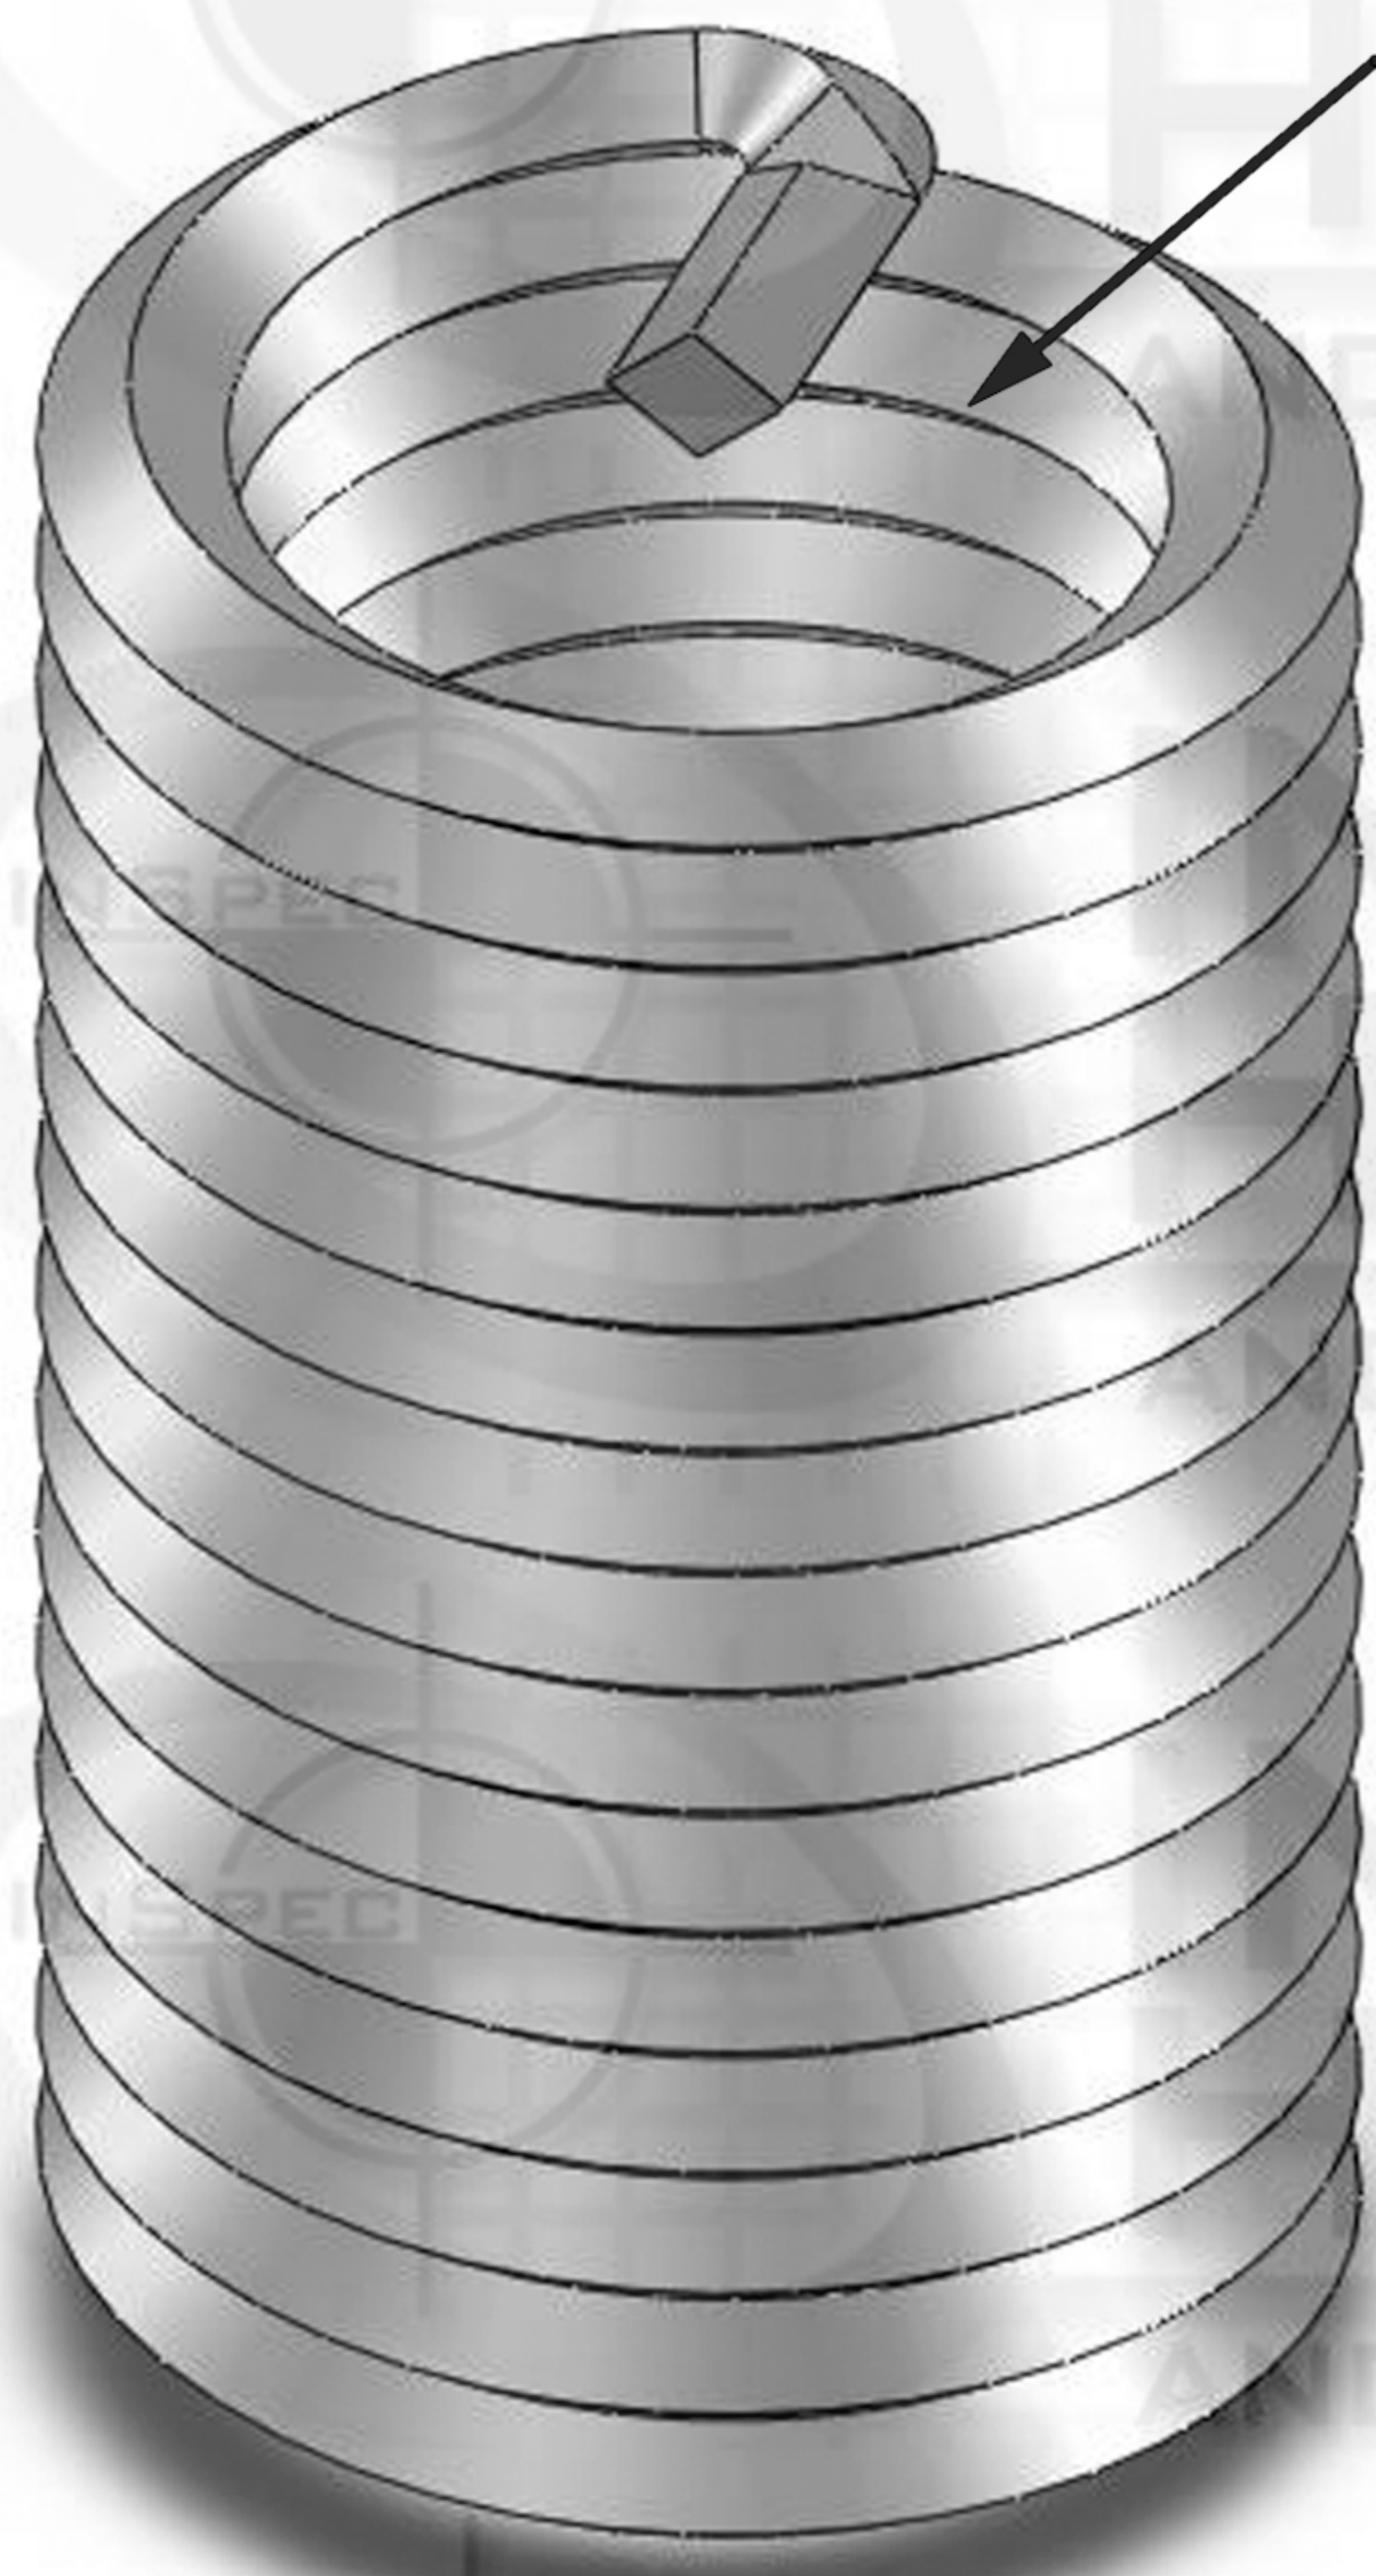

2.438

Suggested Drill Bit Size

1.6250 (1-5/8)



ZONE		REV.	REVISIONS DESCRIPTION	DATE	APPROVED

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES, INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES, INC. IS STRICTLY PROHIBITED.

				NAME	DATE
				DRAWN	
				CHECKED	
				ENG APPR.	
				MFG APPR.	
				Q.A.	
				COMMENTS:	
NEXT ASSY	USED ON	TH. STANDARD: ANSI/ASME ACRONYM: 8UN ROTATION: Right-Hand MATERIAL FINISH Stainless Steel 18-8	PART NUMBER 35L7C-C8KP-162		
APPLICATION	DO NOT SCALE DRAWING				



**17-B KENTUCKY AVENUE
PATERSON, NEW JERSEY 07503
TEL: 973-684-4010 FAX: 973-684-3095
email: TechSupport@industrialhardware.com
www.industrialhardware.com**

SIZE	DWG. NO.	REV.
A		
SCALE: 1:8	WEIGHT: 0.21	SHEET 1 OF 1