




# WireSert Locking

		REVISIONS			
ZONE	REV.	DESCRIPTION	DATE	APPROVED	

Diameter Thread Pitch

3"-8

Tang

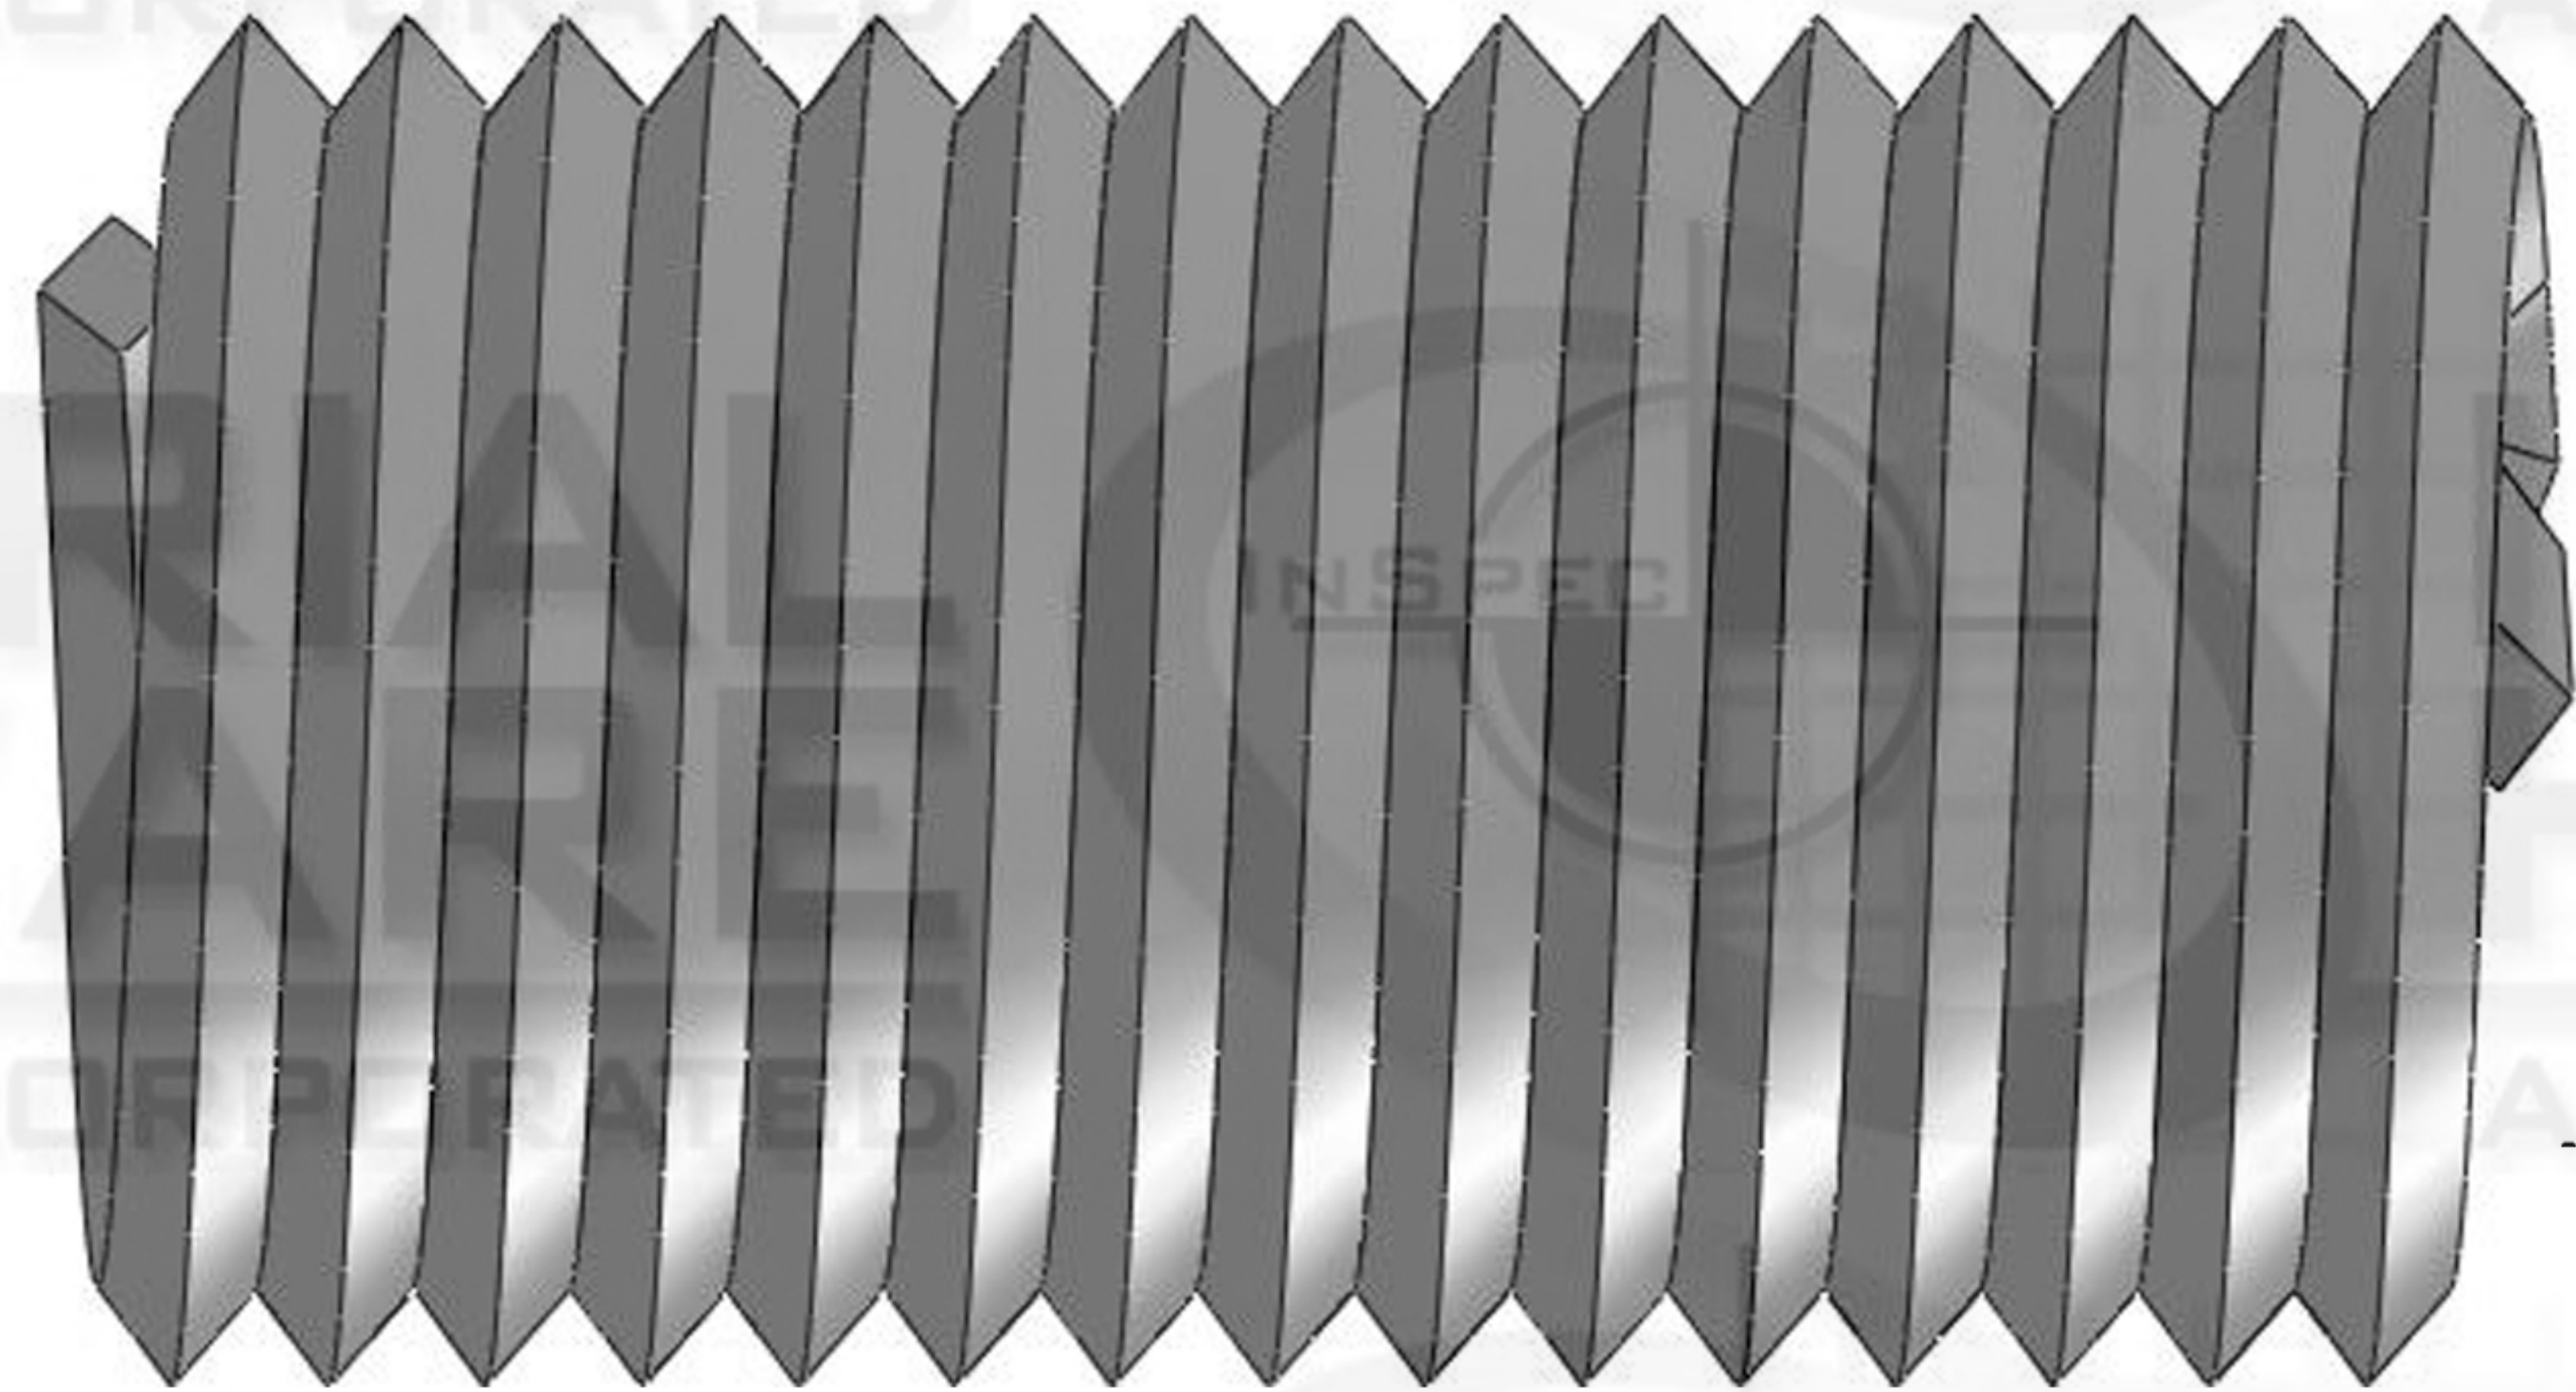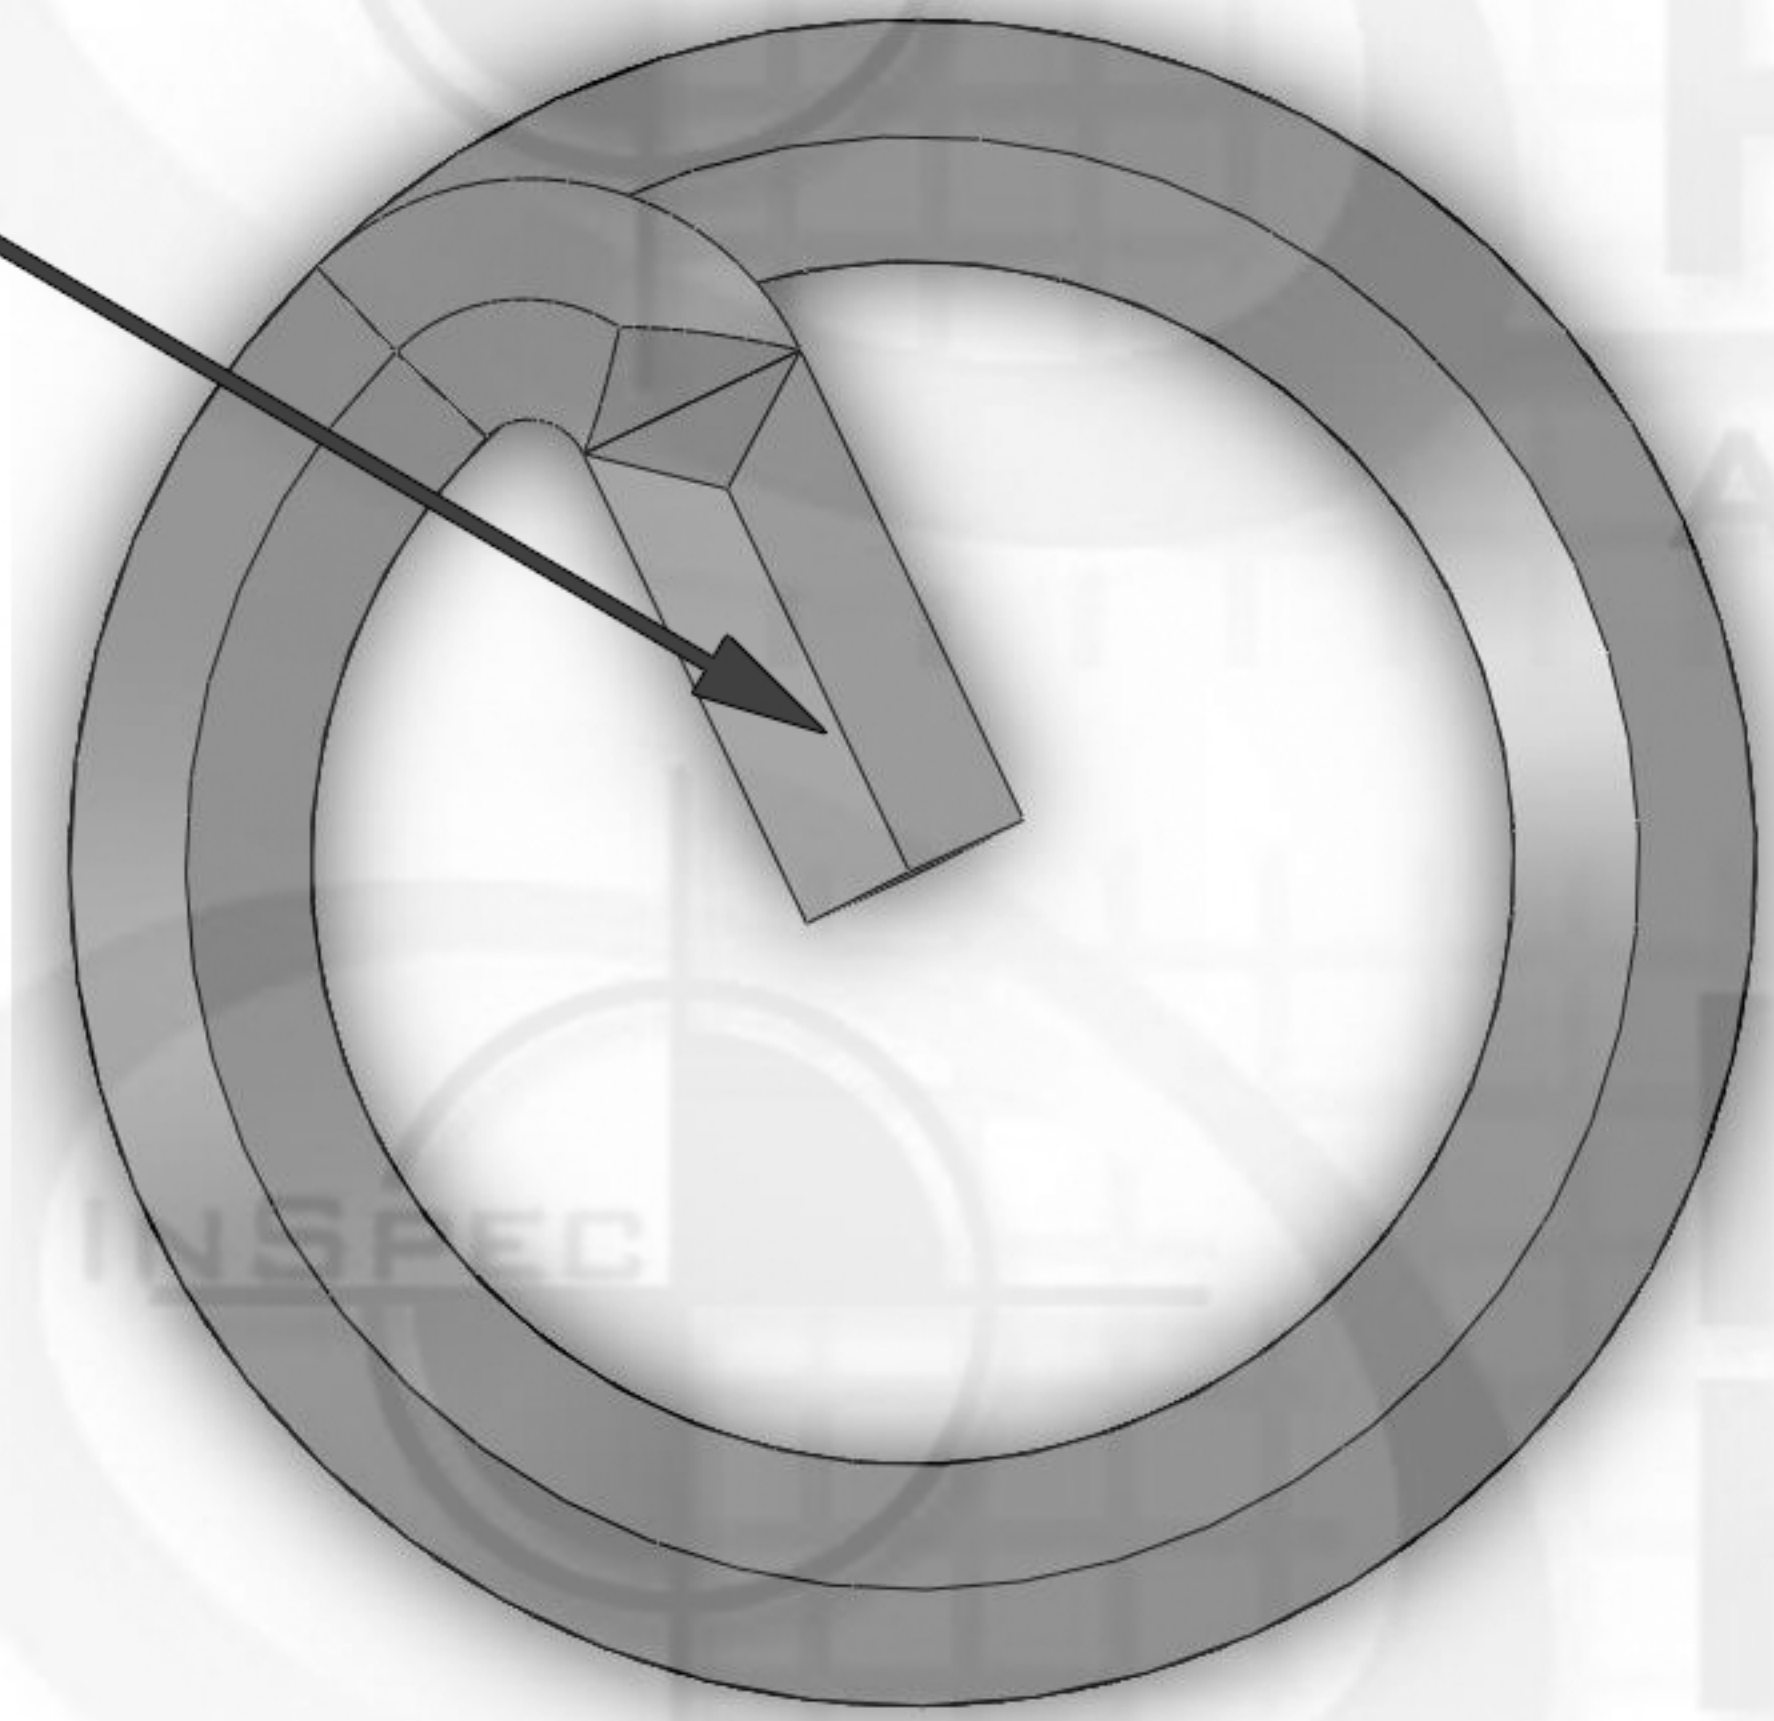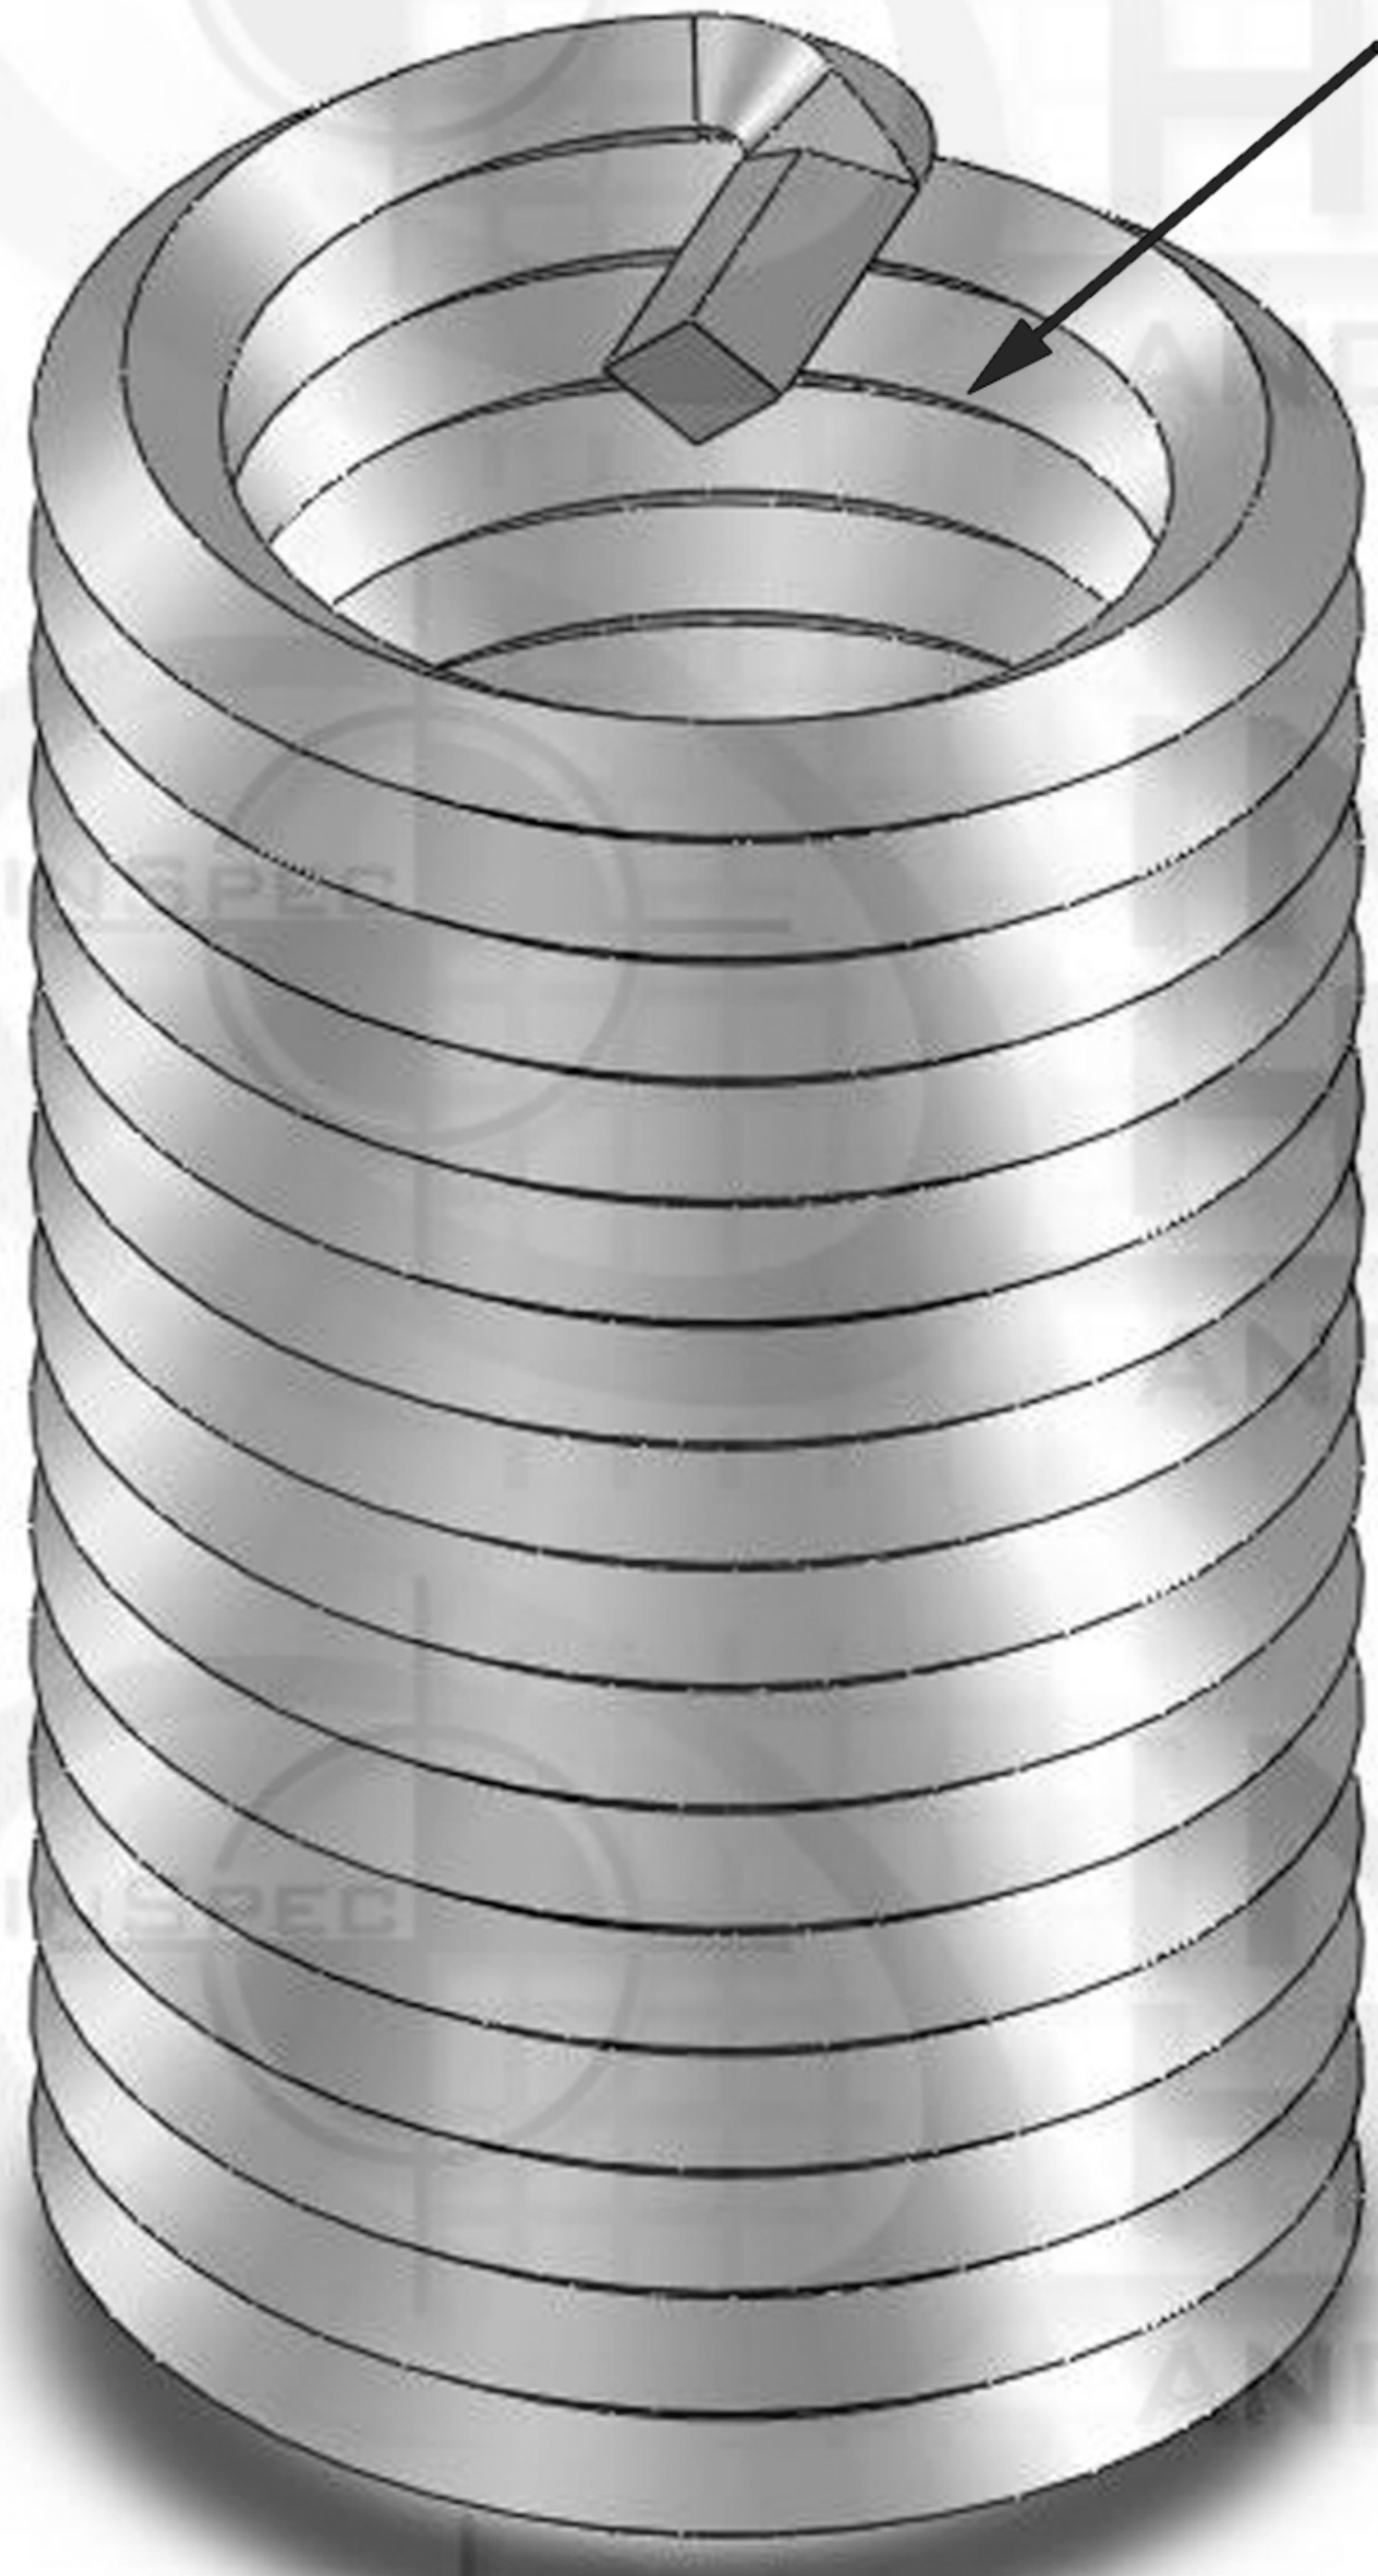

4.5

Suggested Drill Bit Size

3.0000 (3")



## PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

			NAME	DATE
			DRAWN	
			CHECKED	
			ENG APPR.	
			MFG APPR.	
			Q.A.	
			COMMENTS:	
NEXT ASSY	USED ON	TH. STANDARD: ANSI/ASME ACRONYM: 8UN ROTATION: Right-Hand MATERIAL FINISH Stainless Steel 18-8		
		PART NUMBER 35L7C-C8KP-300		
APPLICATION		DO NOT SCALE DRAWING		



**17-B KENTUCKY AVENUE  
PATERSON, NEW JERSEY 07503  
TEL: 973-684-4010 FAX: 973-684-3095  
email: TechSupport@industrialhardware.com  
www.industrialhardware.com**

SIZE	DWG. NO.	REV.
<b>A</b>		
SCALE: 1:8	WEIGHT: 0.69	SHEET 1 OF 1