
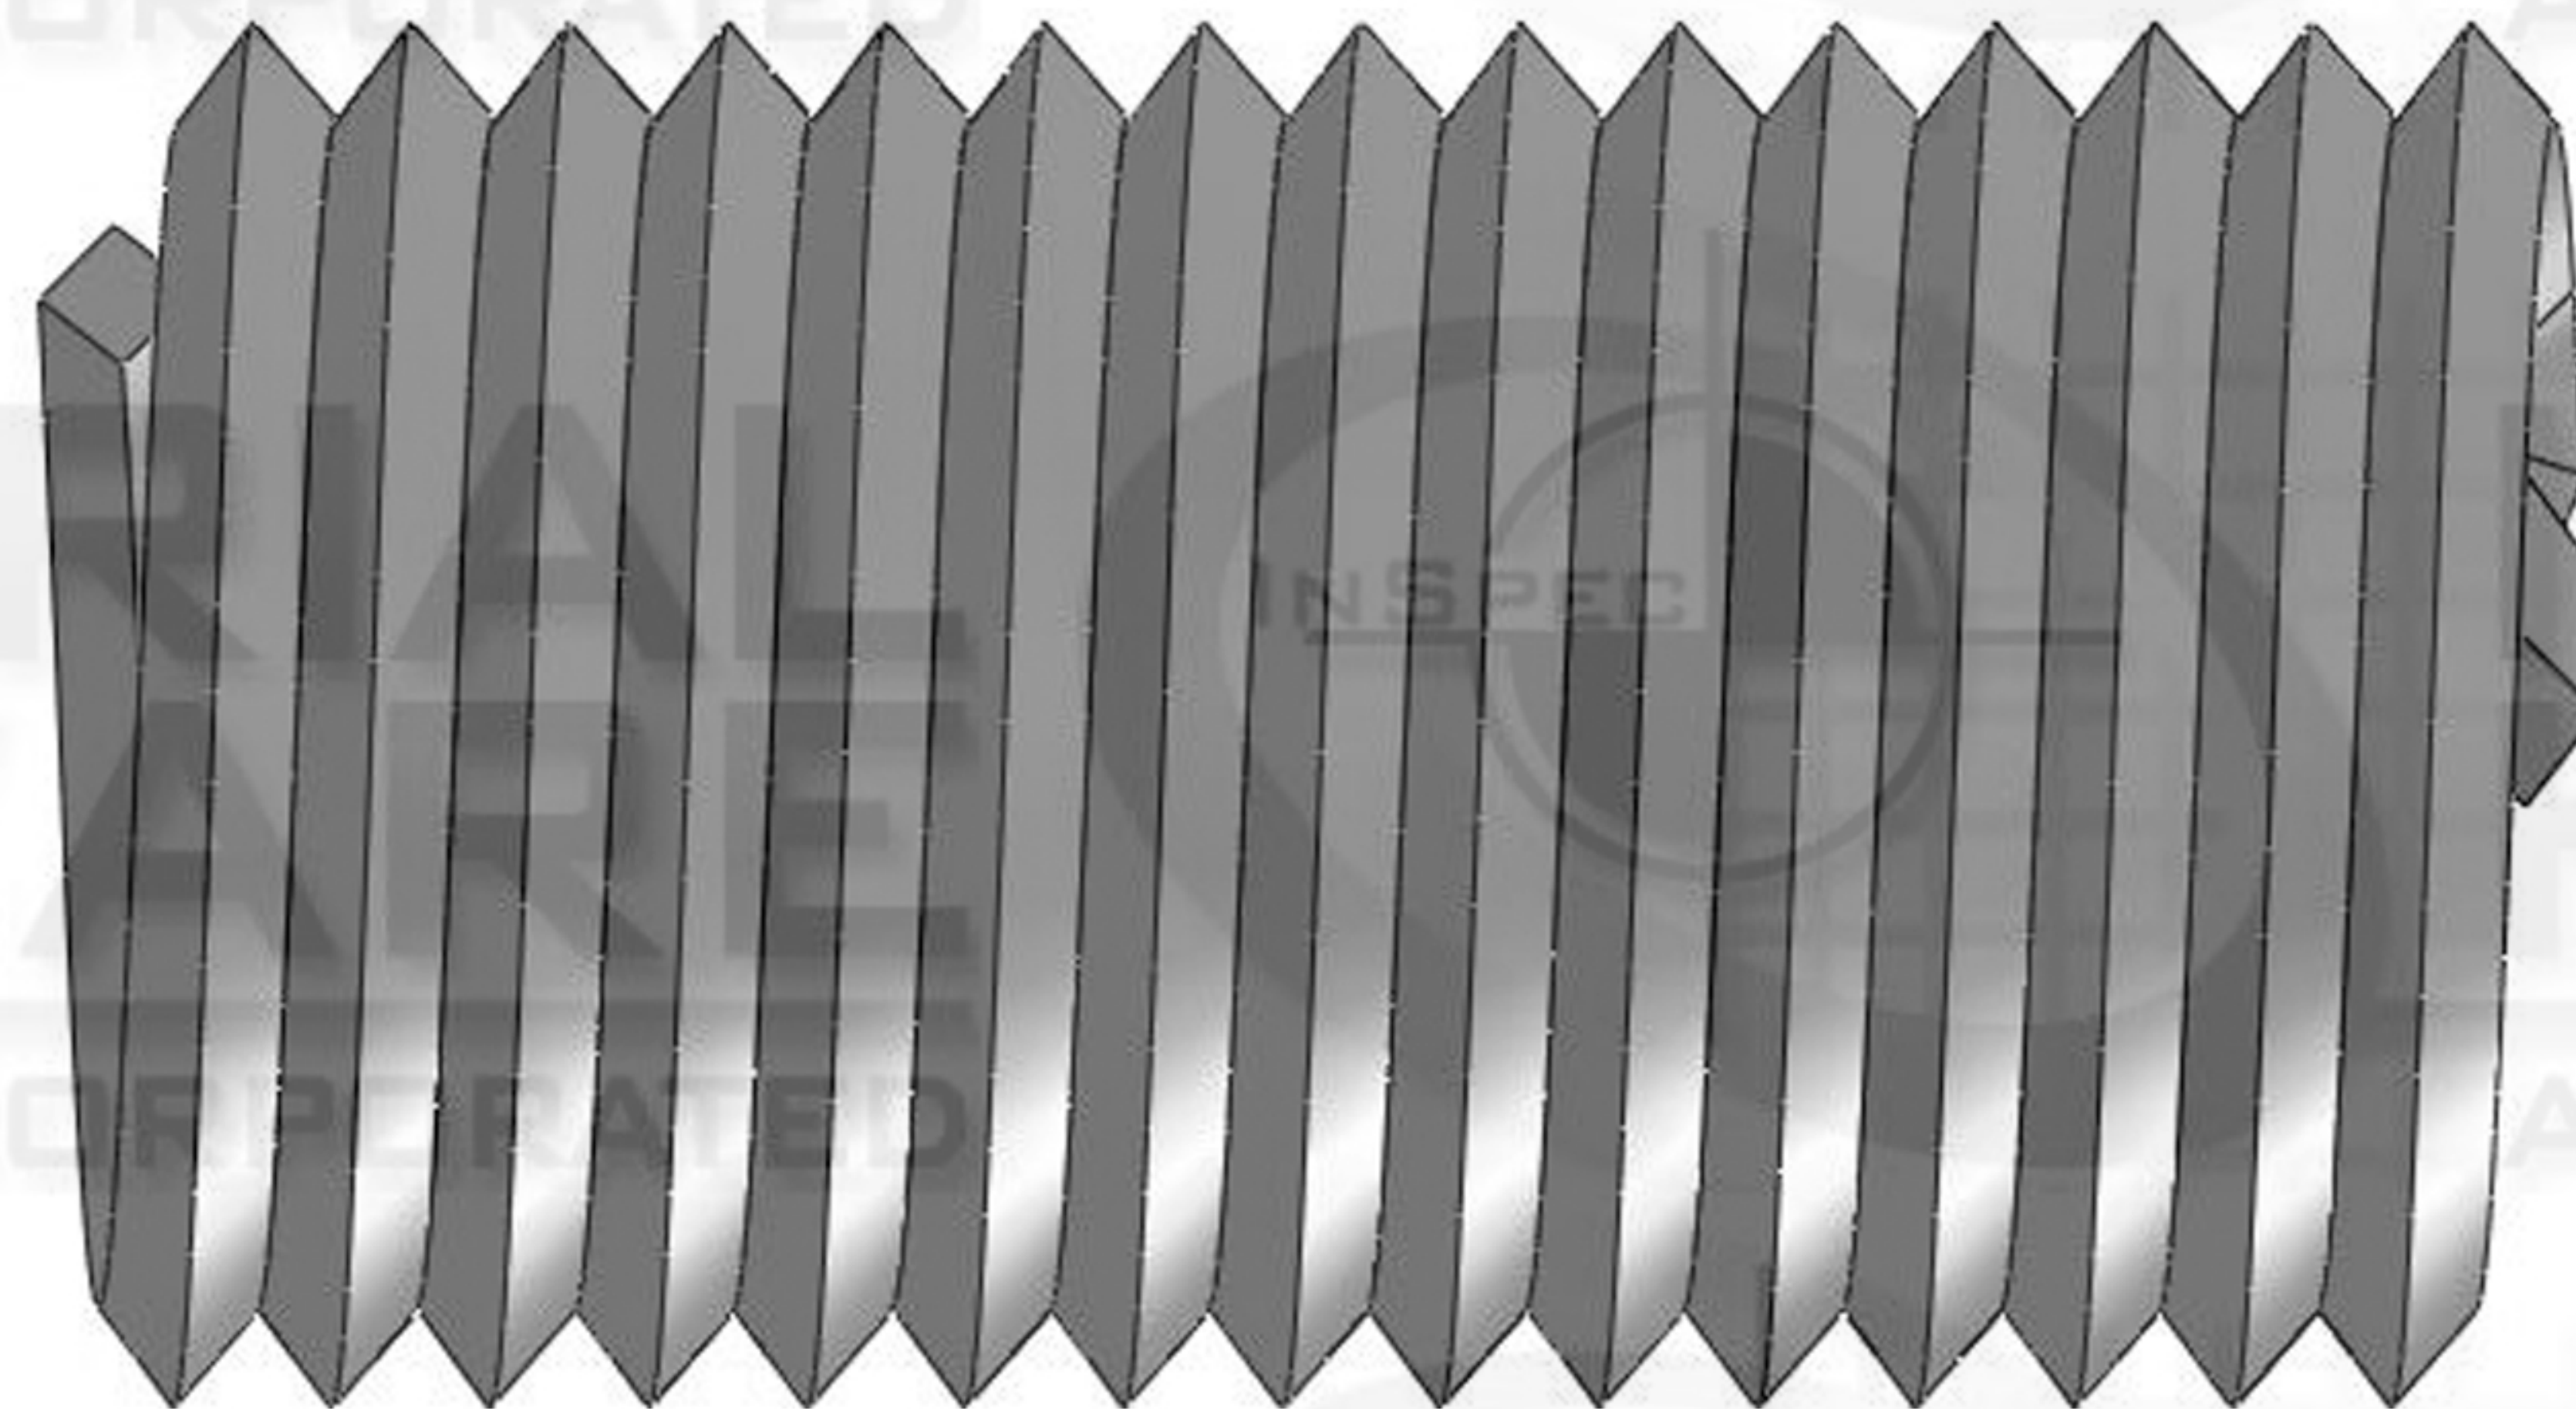
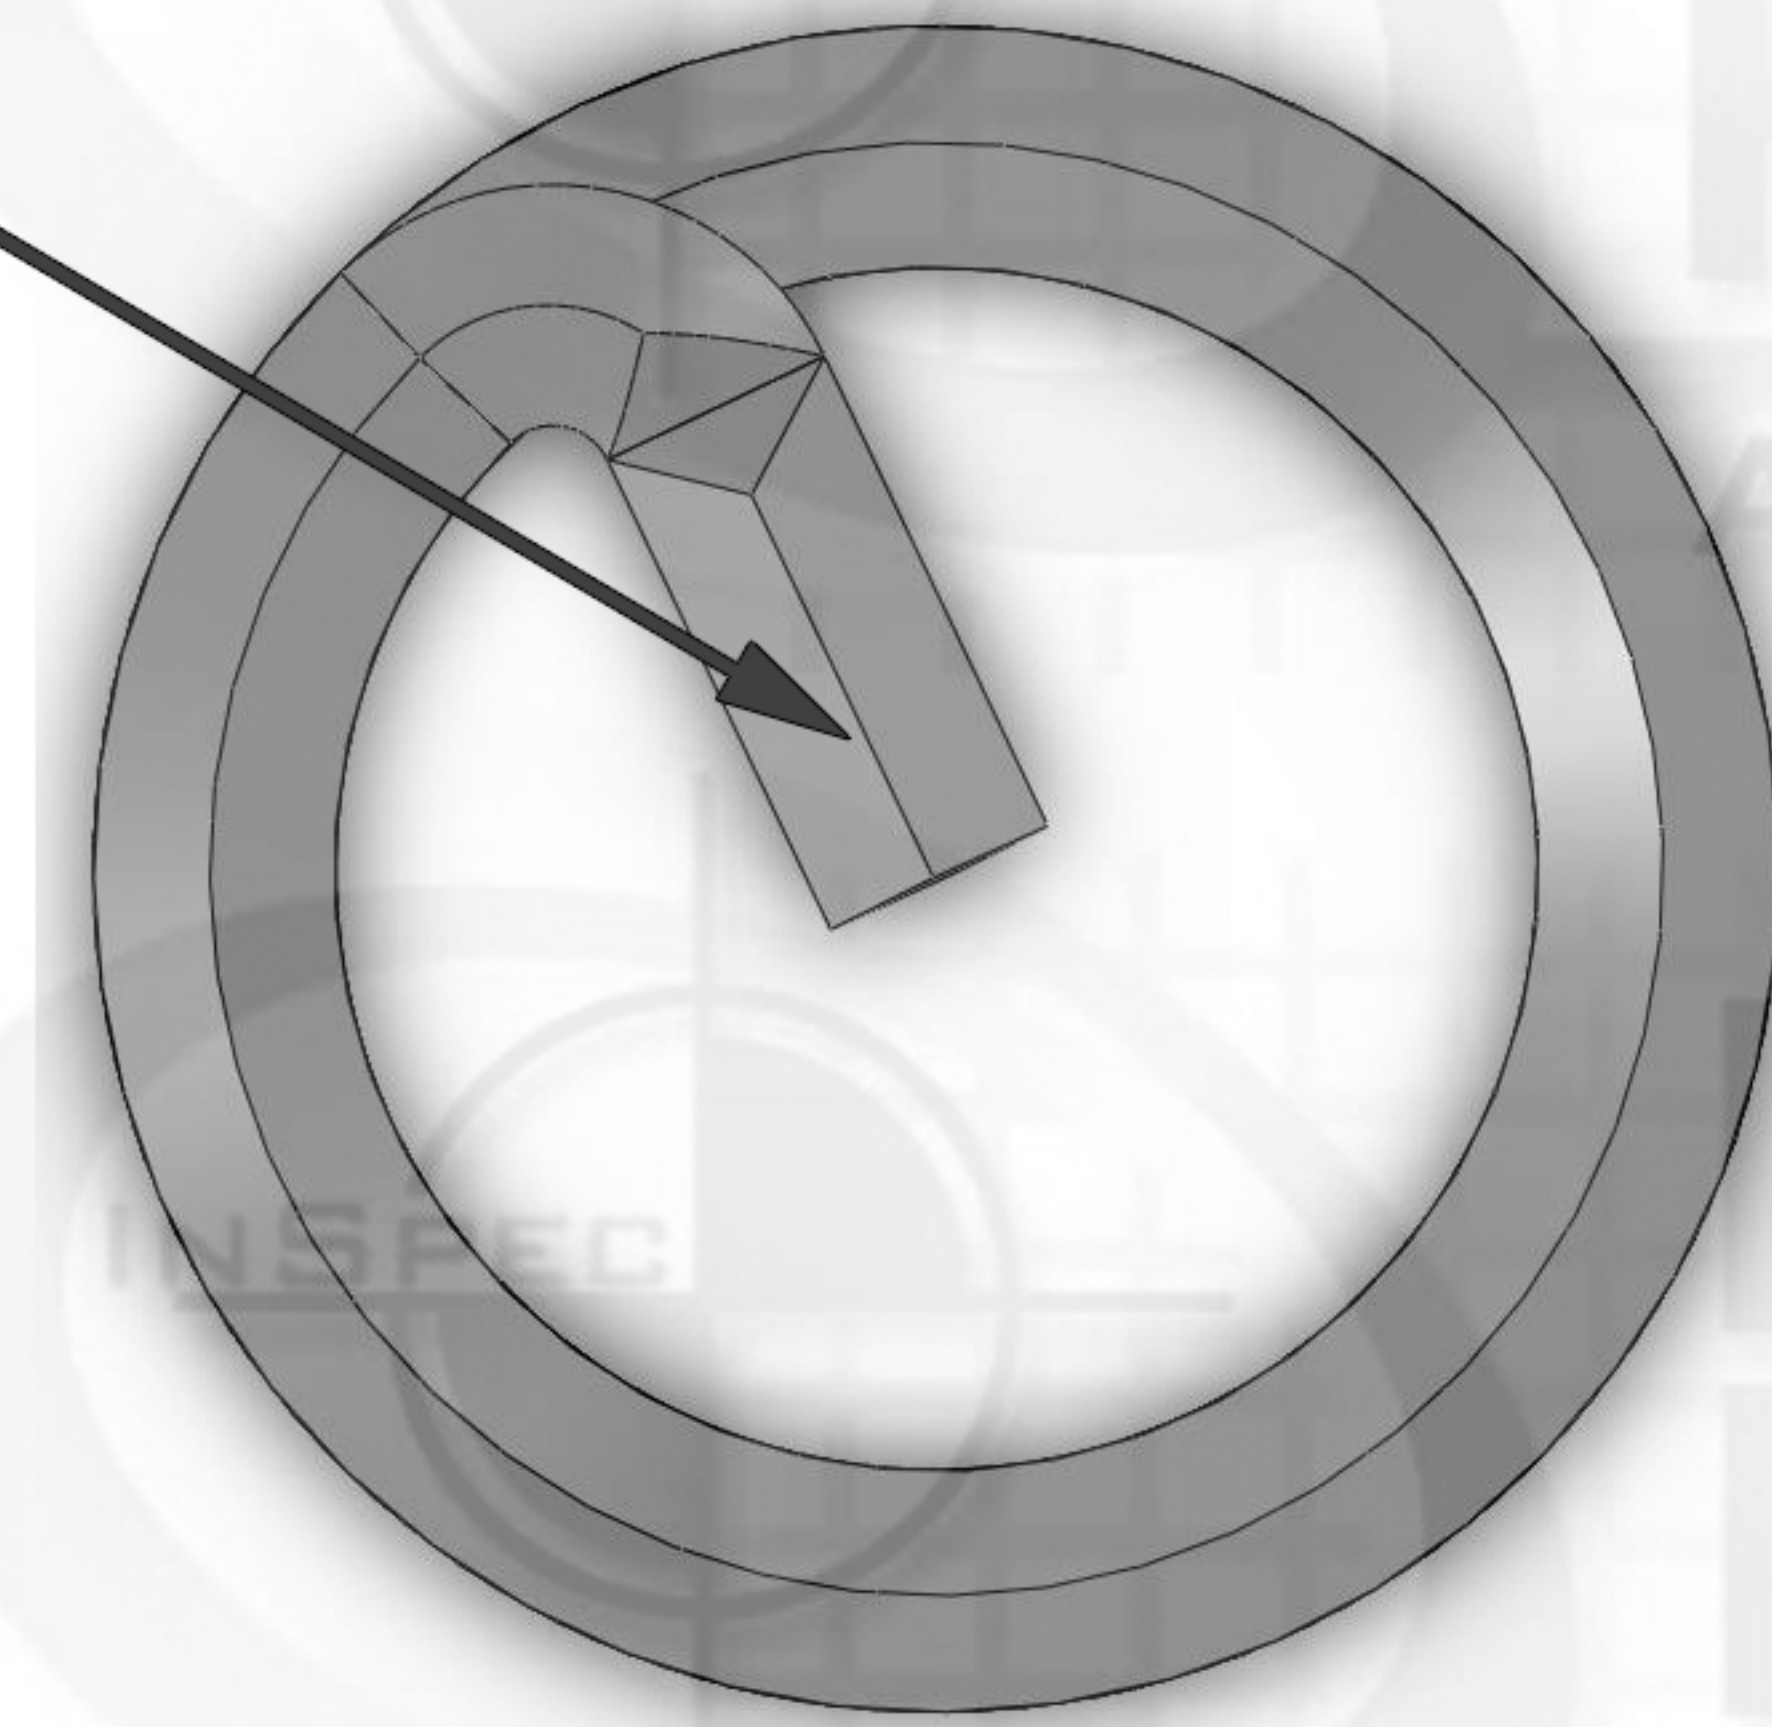


WireSert Locking

Diameter Thread Pitch

M16 x 2

Tang

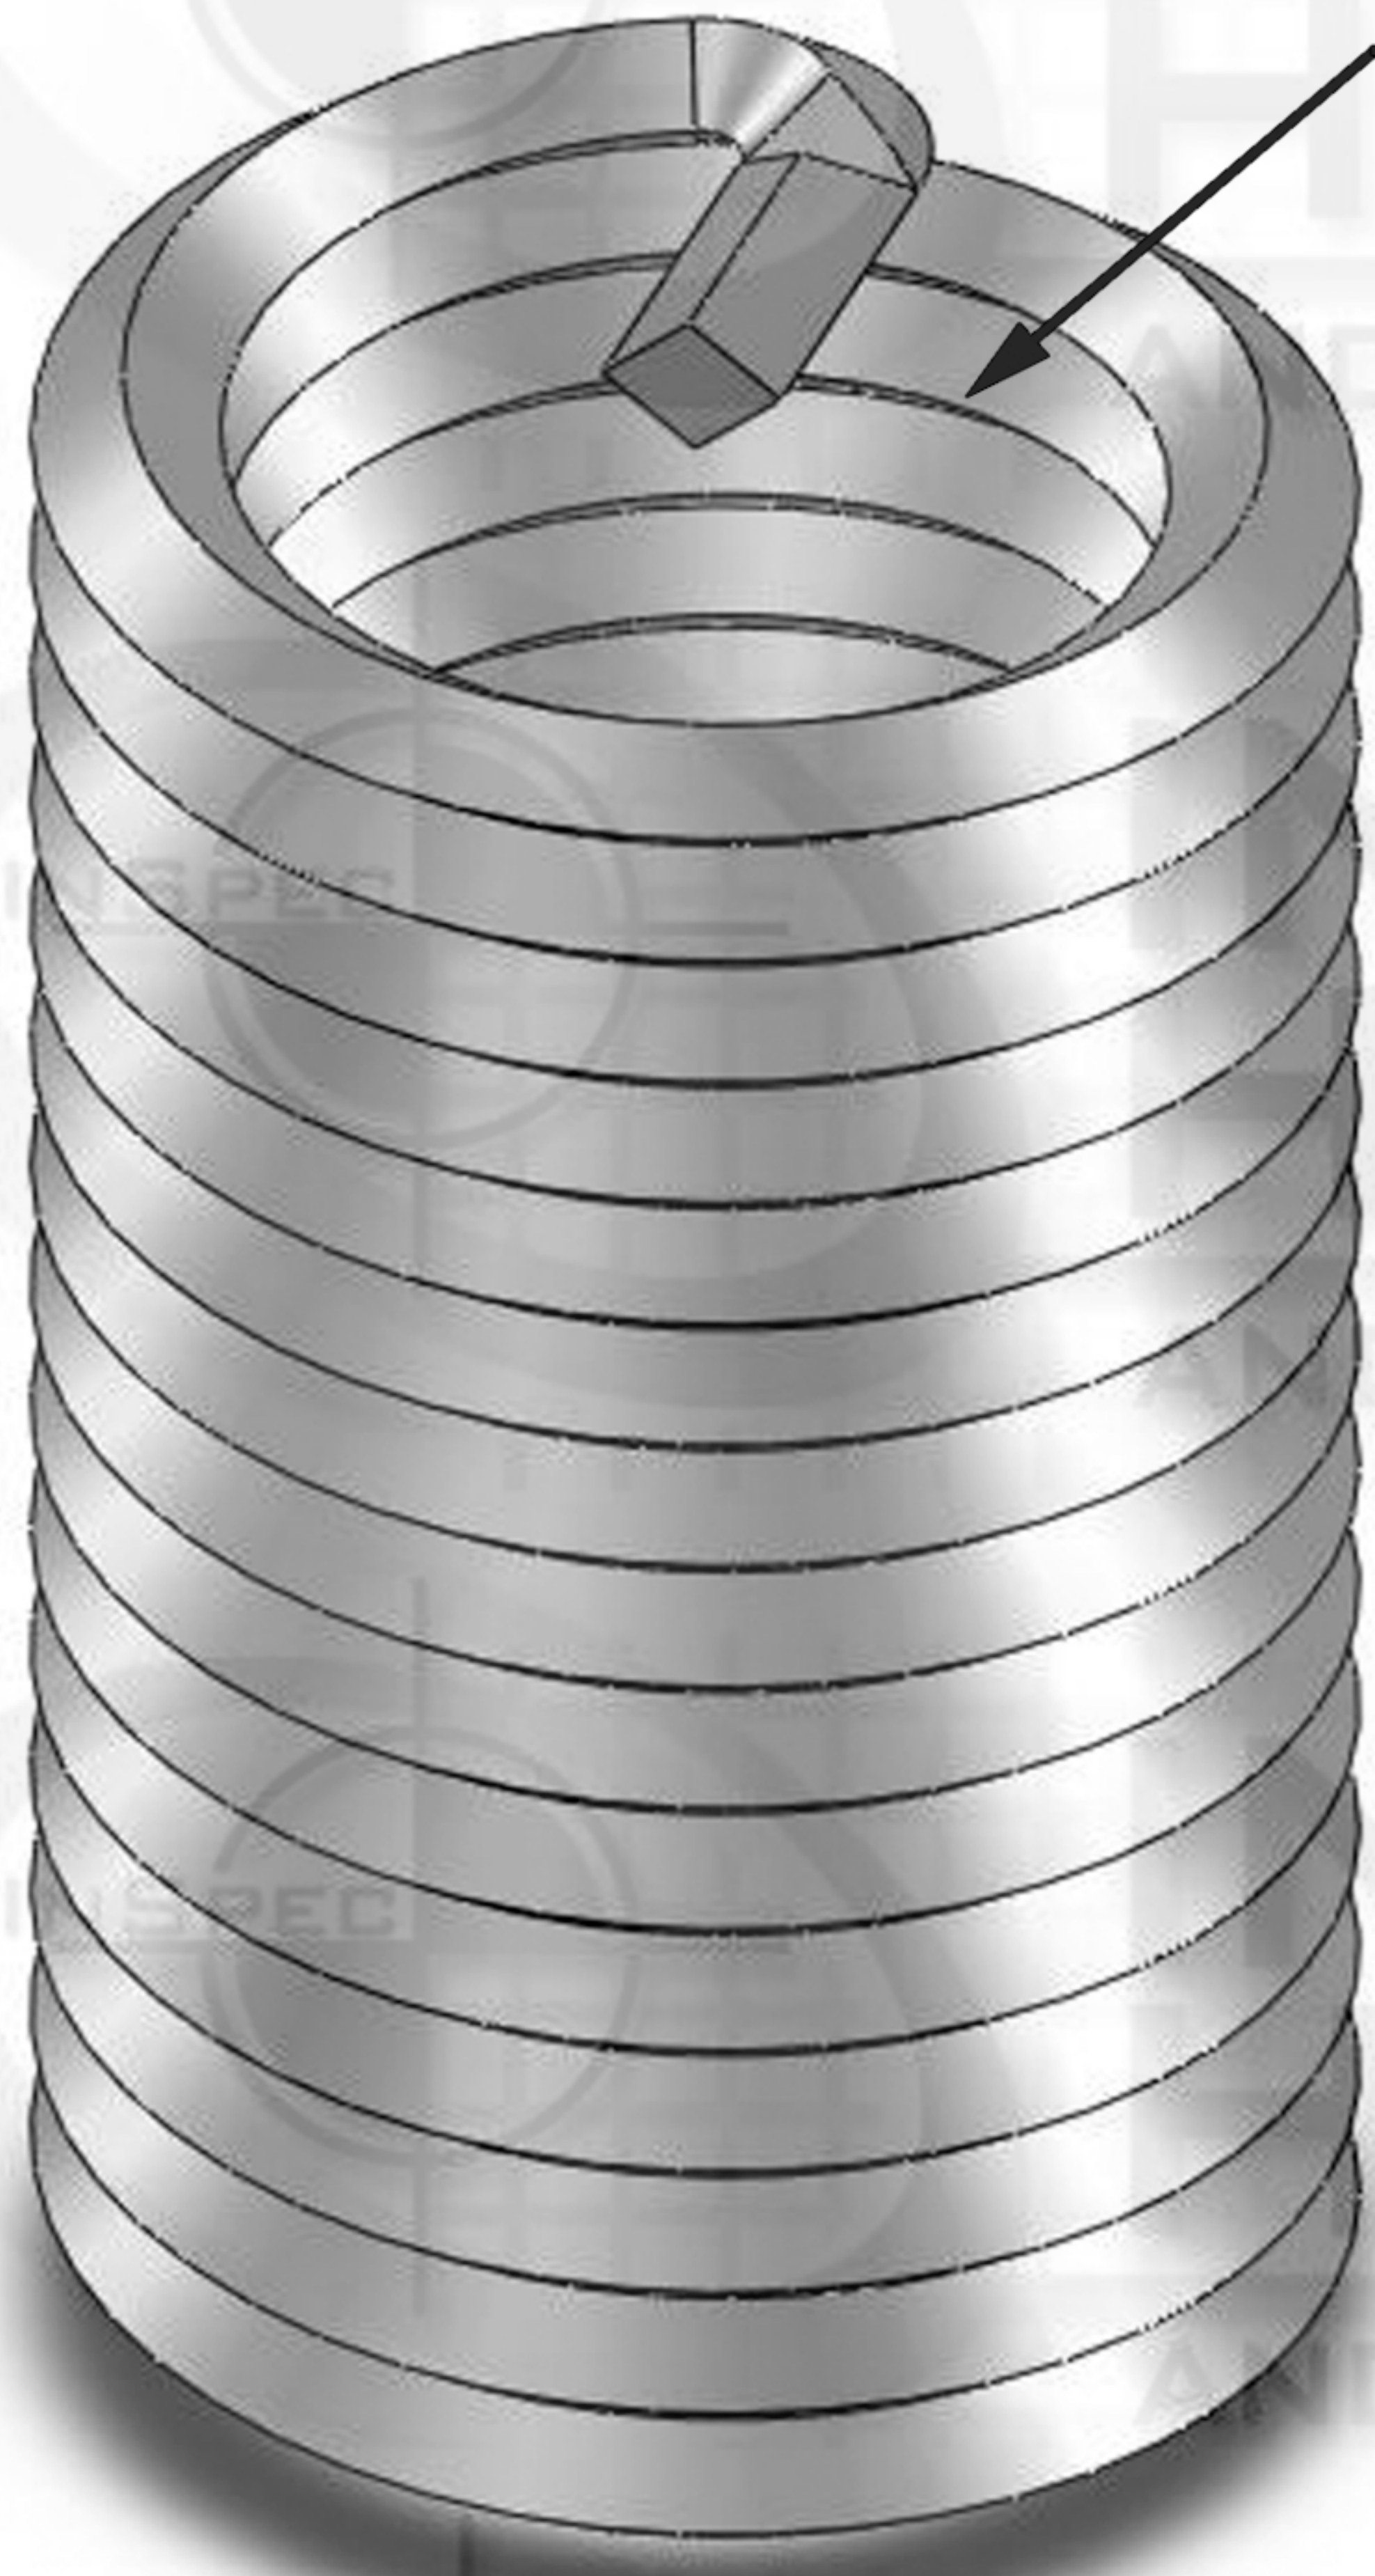

48mm

Suggested Drill Bit Size 0.6563 (21/32)



REVISIONS		DATE	APPROVED
ZONE	REV.	DESCRIPTION	

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

			NAME	DATE
			DRAWN	
			CHECKED	
			ENG APPR.	
			MFG APPR.	
			Q.A.	
			COMMENTS:	
NEXT ASSY	USED ON	AEROSPACE MA3329-318		
		TH. STANDARD: ISO Metric ACRONYM: ISO ROTATION: Right-Hand MATERIAL FINISH Stainless Steel 18-8		
		PART NUMBER 35L7C-C8M2-C16N30-1J		
APPLICATION		DO NOT SCALE DRAWING		



**17-B KENTUCKY AVENUE
PATERSON, NEW JERSEY 07503
TEL: 973-684-4010 FAX: 973-684-3095
email: TechSupport@industrialhardware.com
www.industrialhardware.com**

SIZE	DWG. NO.	REV.
A		
SCALE: 1:8	WEIGHT: 2.13	SHEET 1 OF 1