
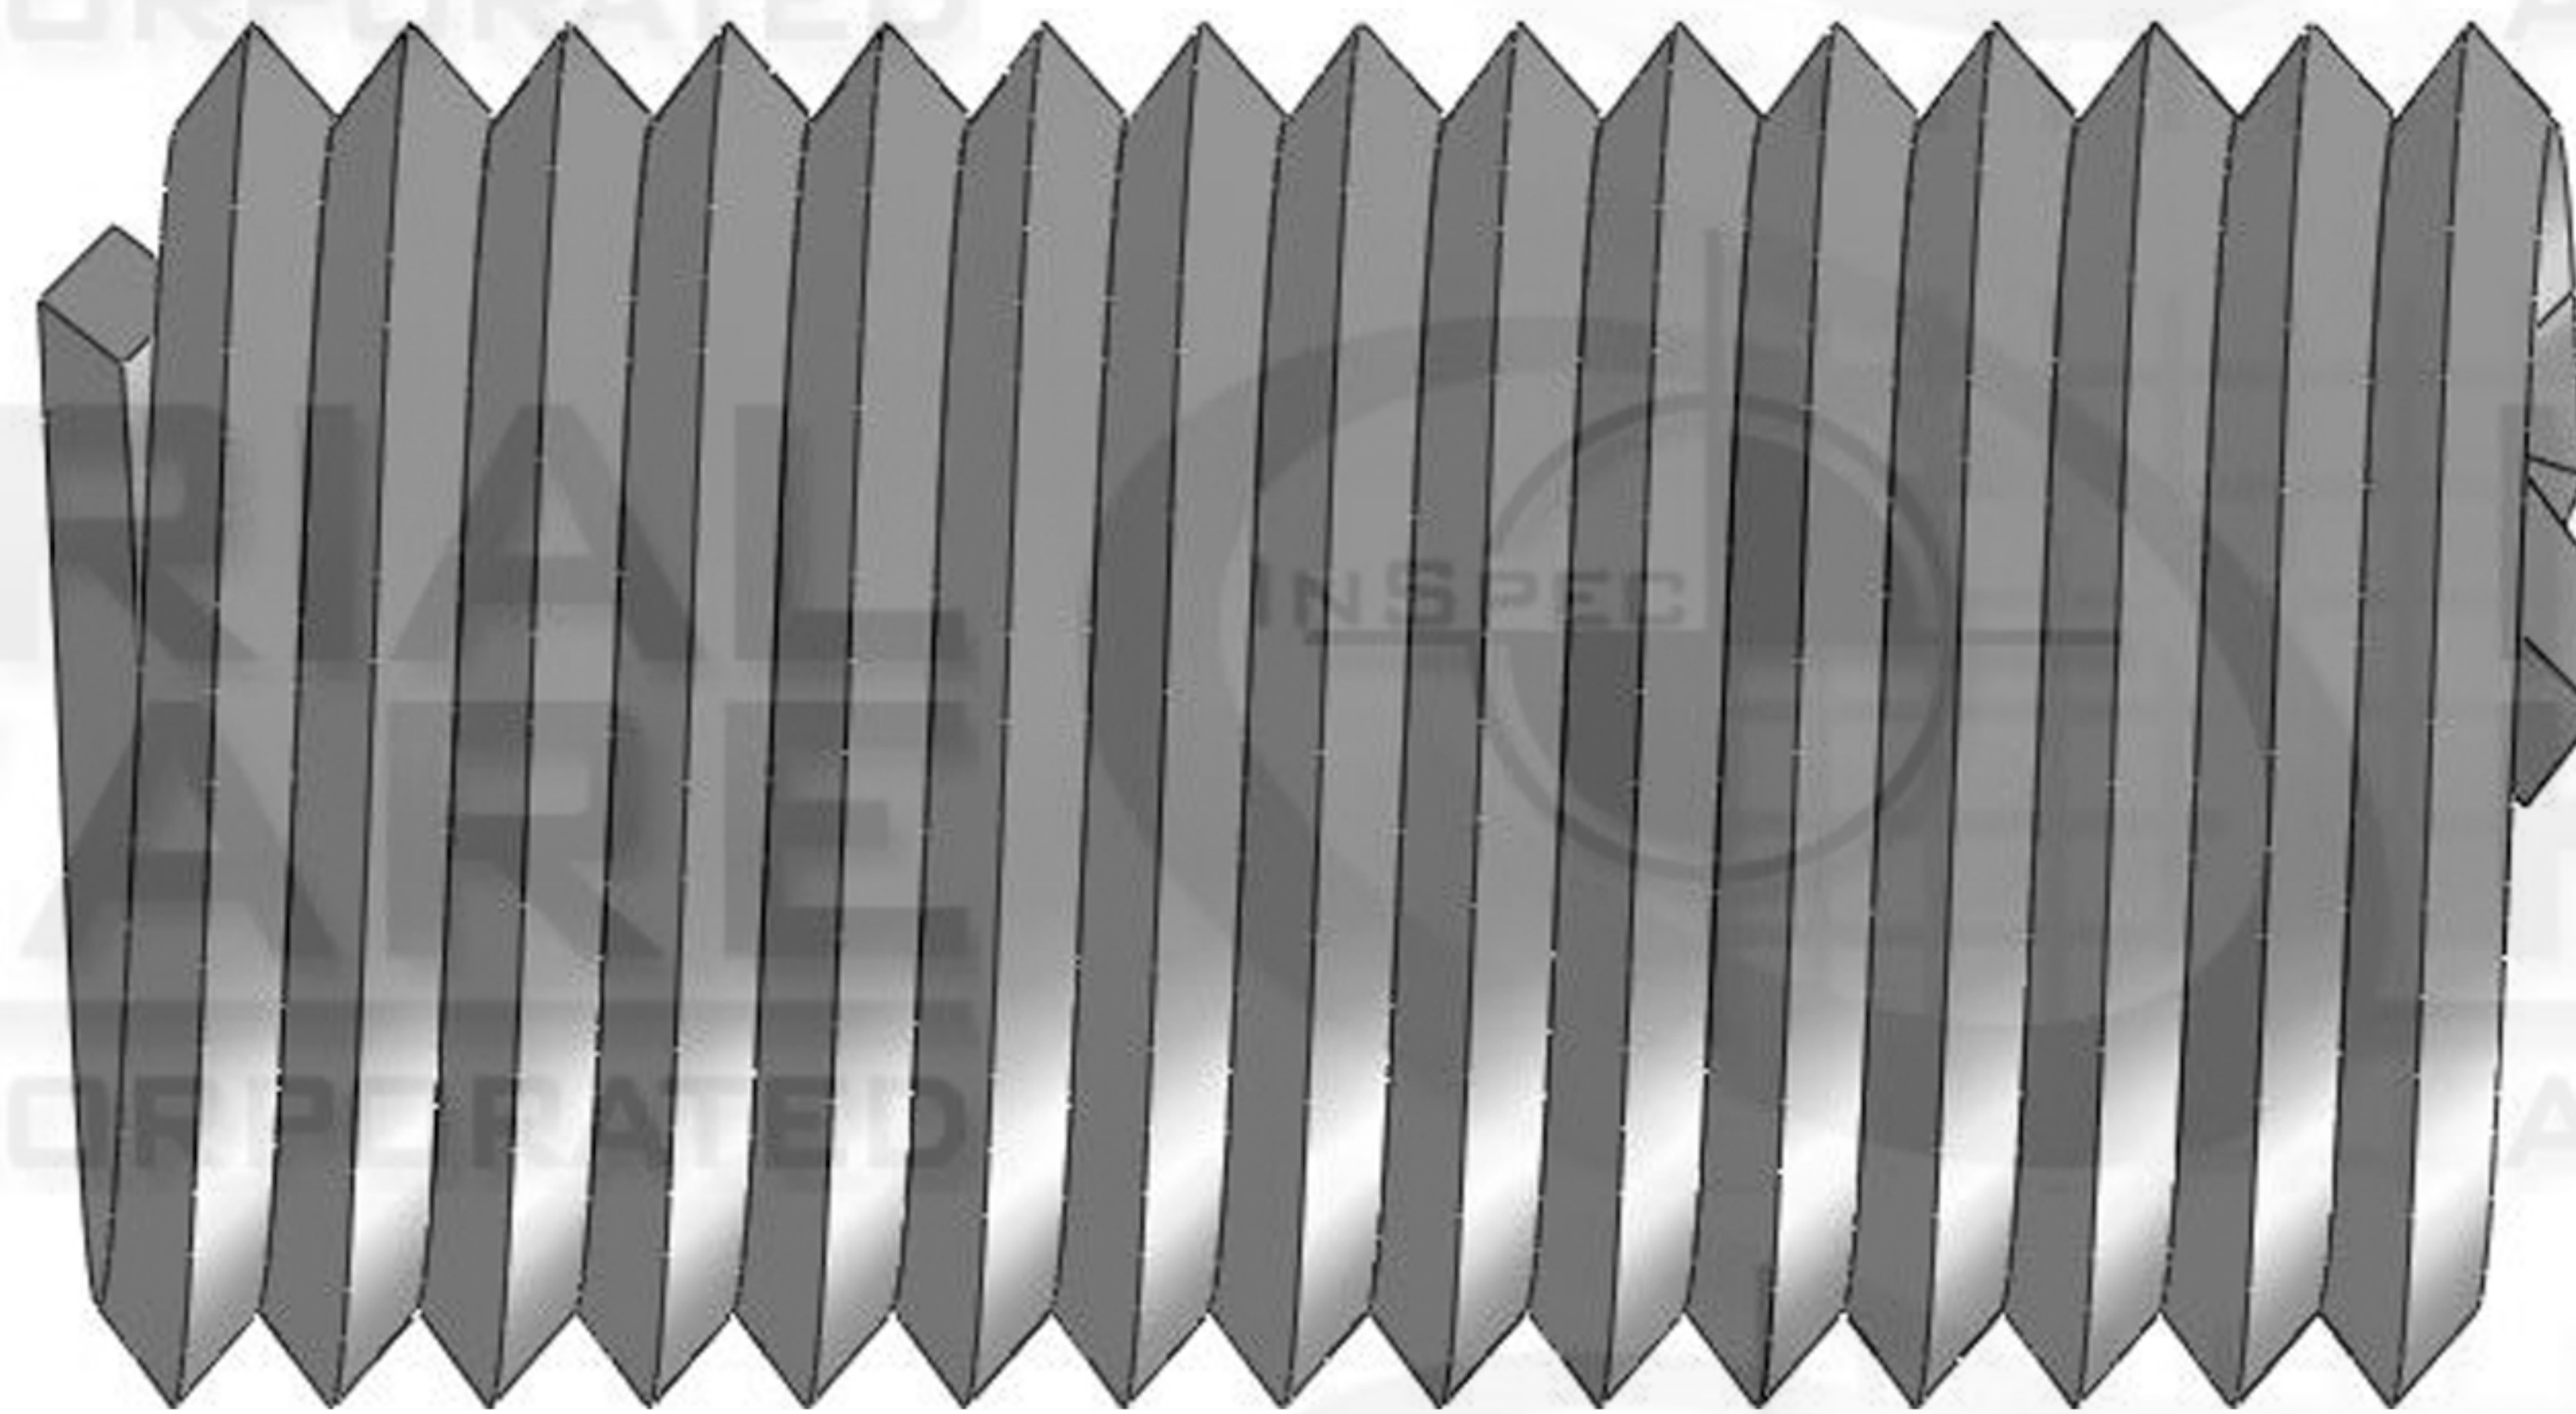
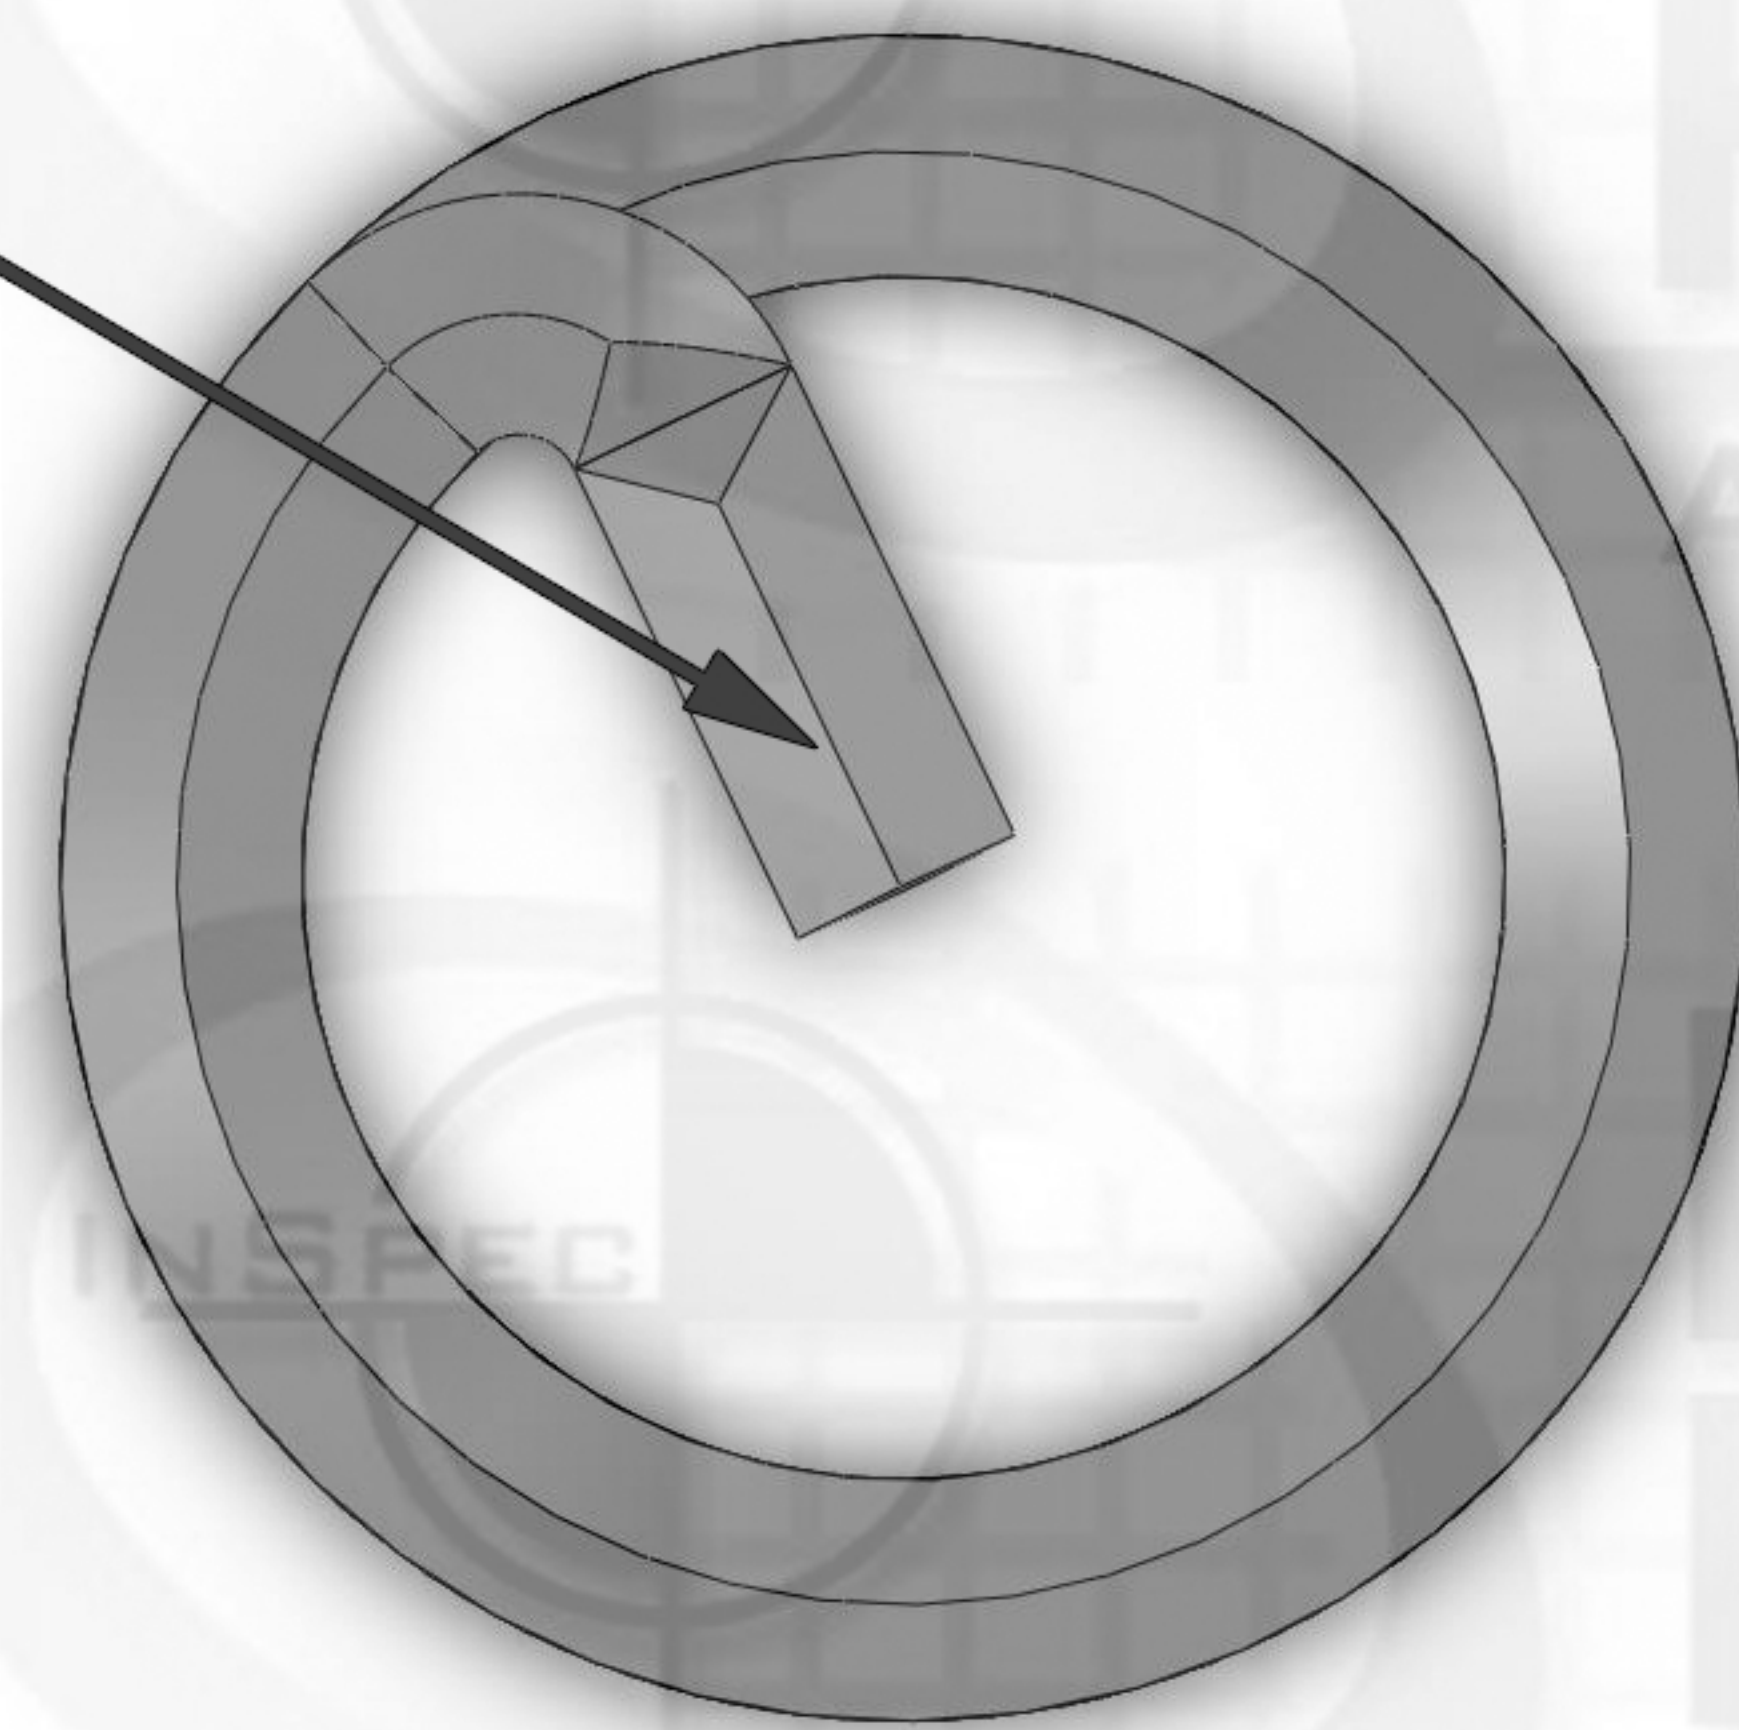


WireSert Locking

Diameter Thread Pitch

M20 x 2.5

Tang

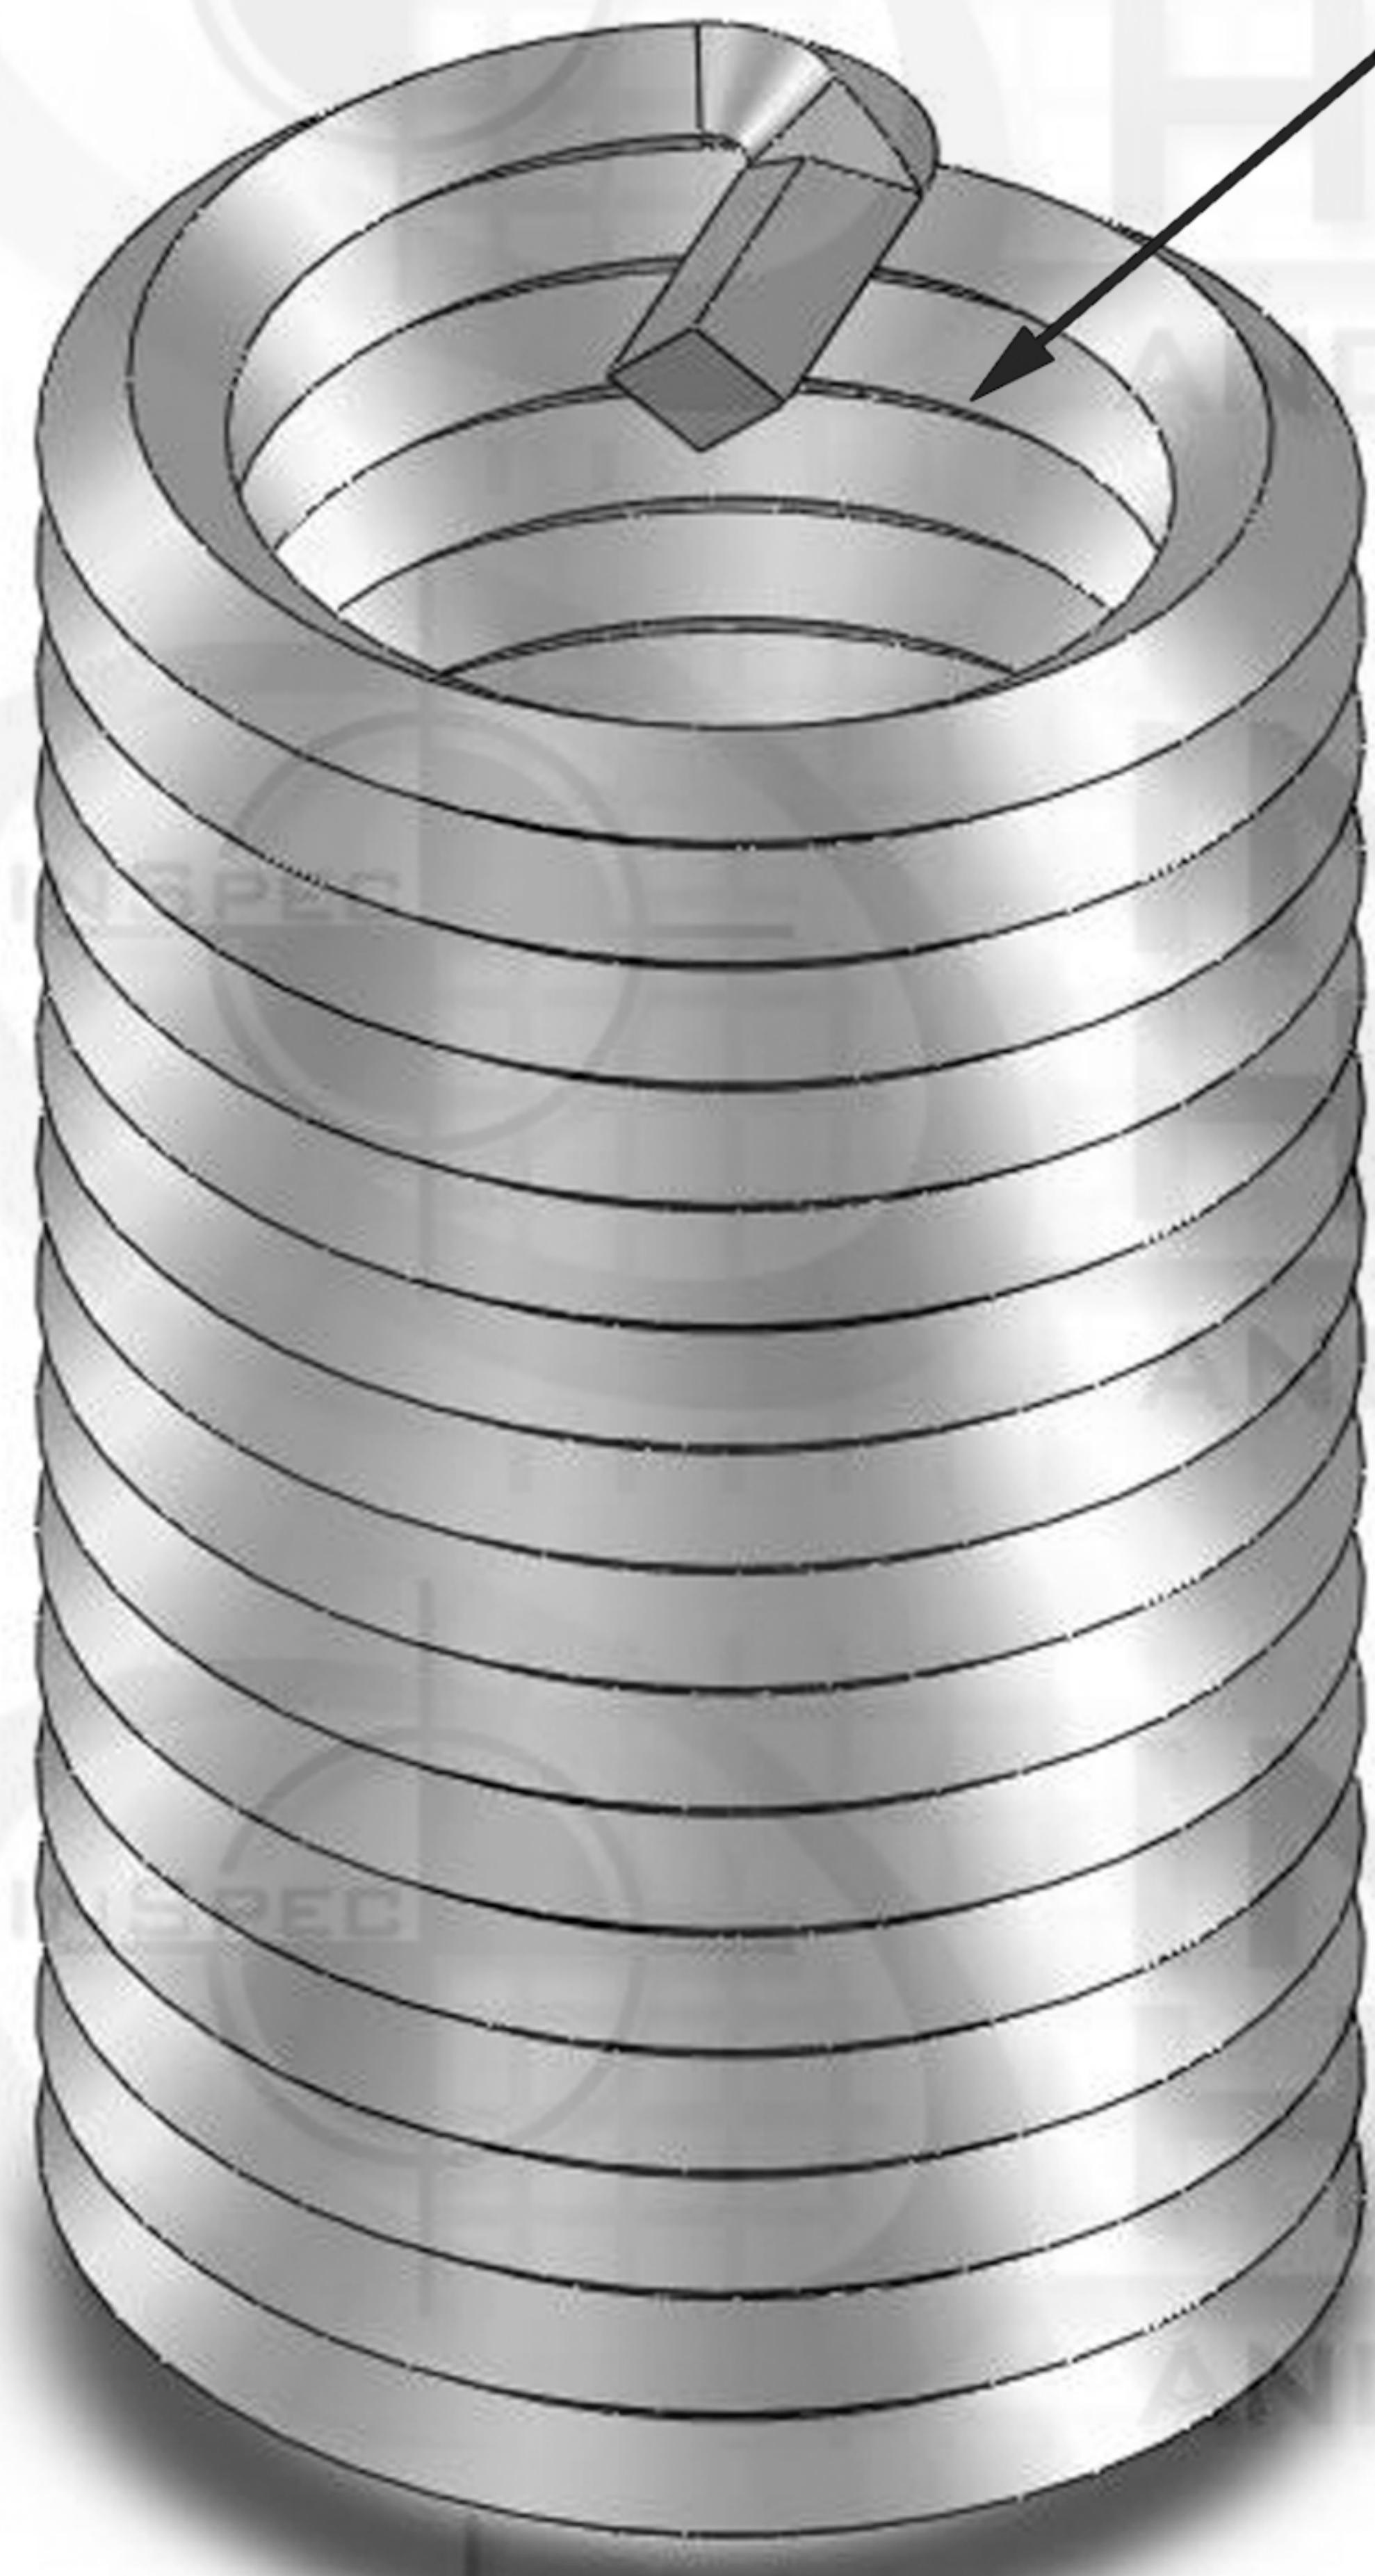


50mm

Suggested Drill Bit Size  0.8125 (13/16)

		REVISIONS			
ZONE	REV.	DESCRIPTION	DATE	APPROVED	

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND ITS CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES, INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES, INC. IS STRICTLY PROHIBITED.

				NAME	DATE	 <p>INDUSTRIAL HARDWARE AND SPECIALTIES INCORPORATED</p> <p>17-B KENTUCKY AVENUE PATERSON, NEW JERSEY 07503 TEL: 973-684-4010 FAX: 973-684-3095 email: TechSupport@industrialhardware.com www.industrialhardware.com</p>
				DRAWN		
				CHECKED		
				ENG APPR.		
				MFG APPR.		
				Q.A.		COMMENTS:
NEXT ASSY	USED ON	AEROSPACE MA3329-274	TH. STANDARD: ISO Metric ACRONYM: ISO ROTATION: Right-Hand MATERIAL FINISH Stainless Steel 18-8			
APPLICATION		PART NUMBER 35L7C-C8M2-C20P25-0F	DO NOT SCALE DRAWING			
		SIZE	DWG. NO.	REV.		
		A				
		SCALE: 1:8	WEIGHT: 1.12	SHEET 1 OF 1		