




# WireSert Locking

REV. NO.		REVISIONS	DATE	APPROVED
ZONE	REV.	DESCRIPTION		

Diameter Thread Pitch

M48 x 5

Tang

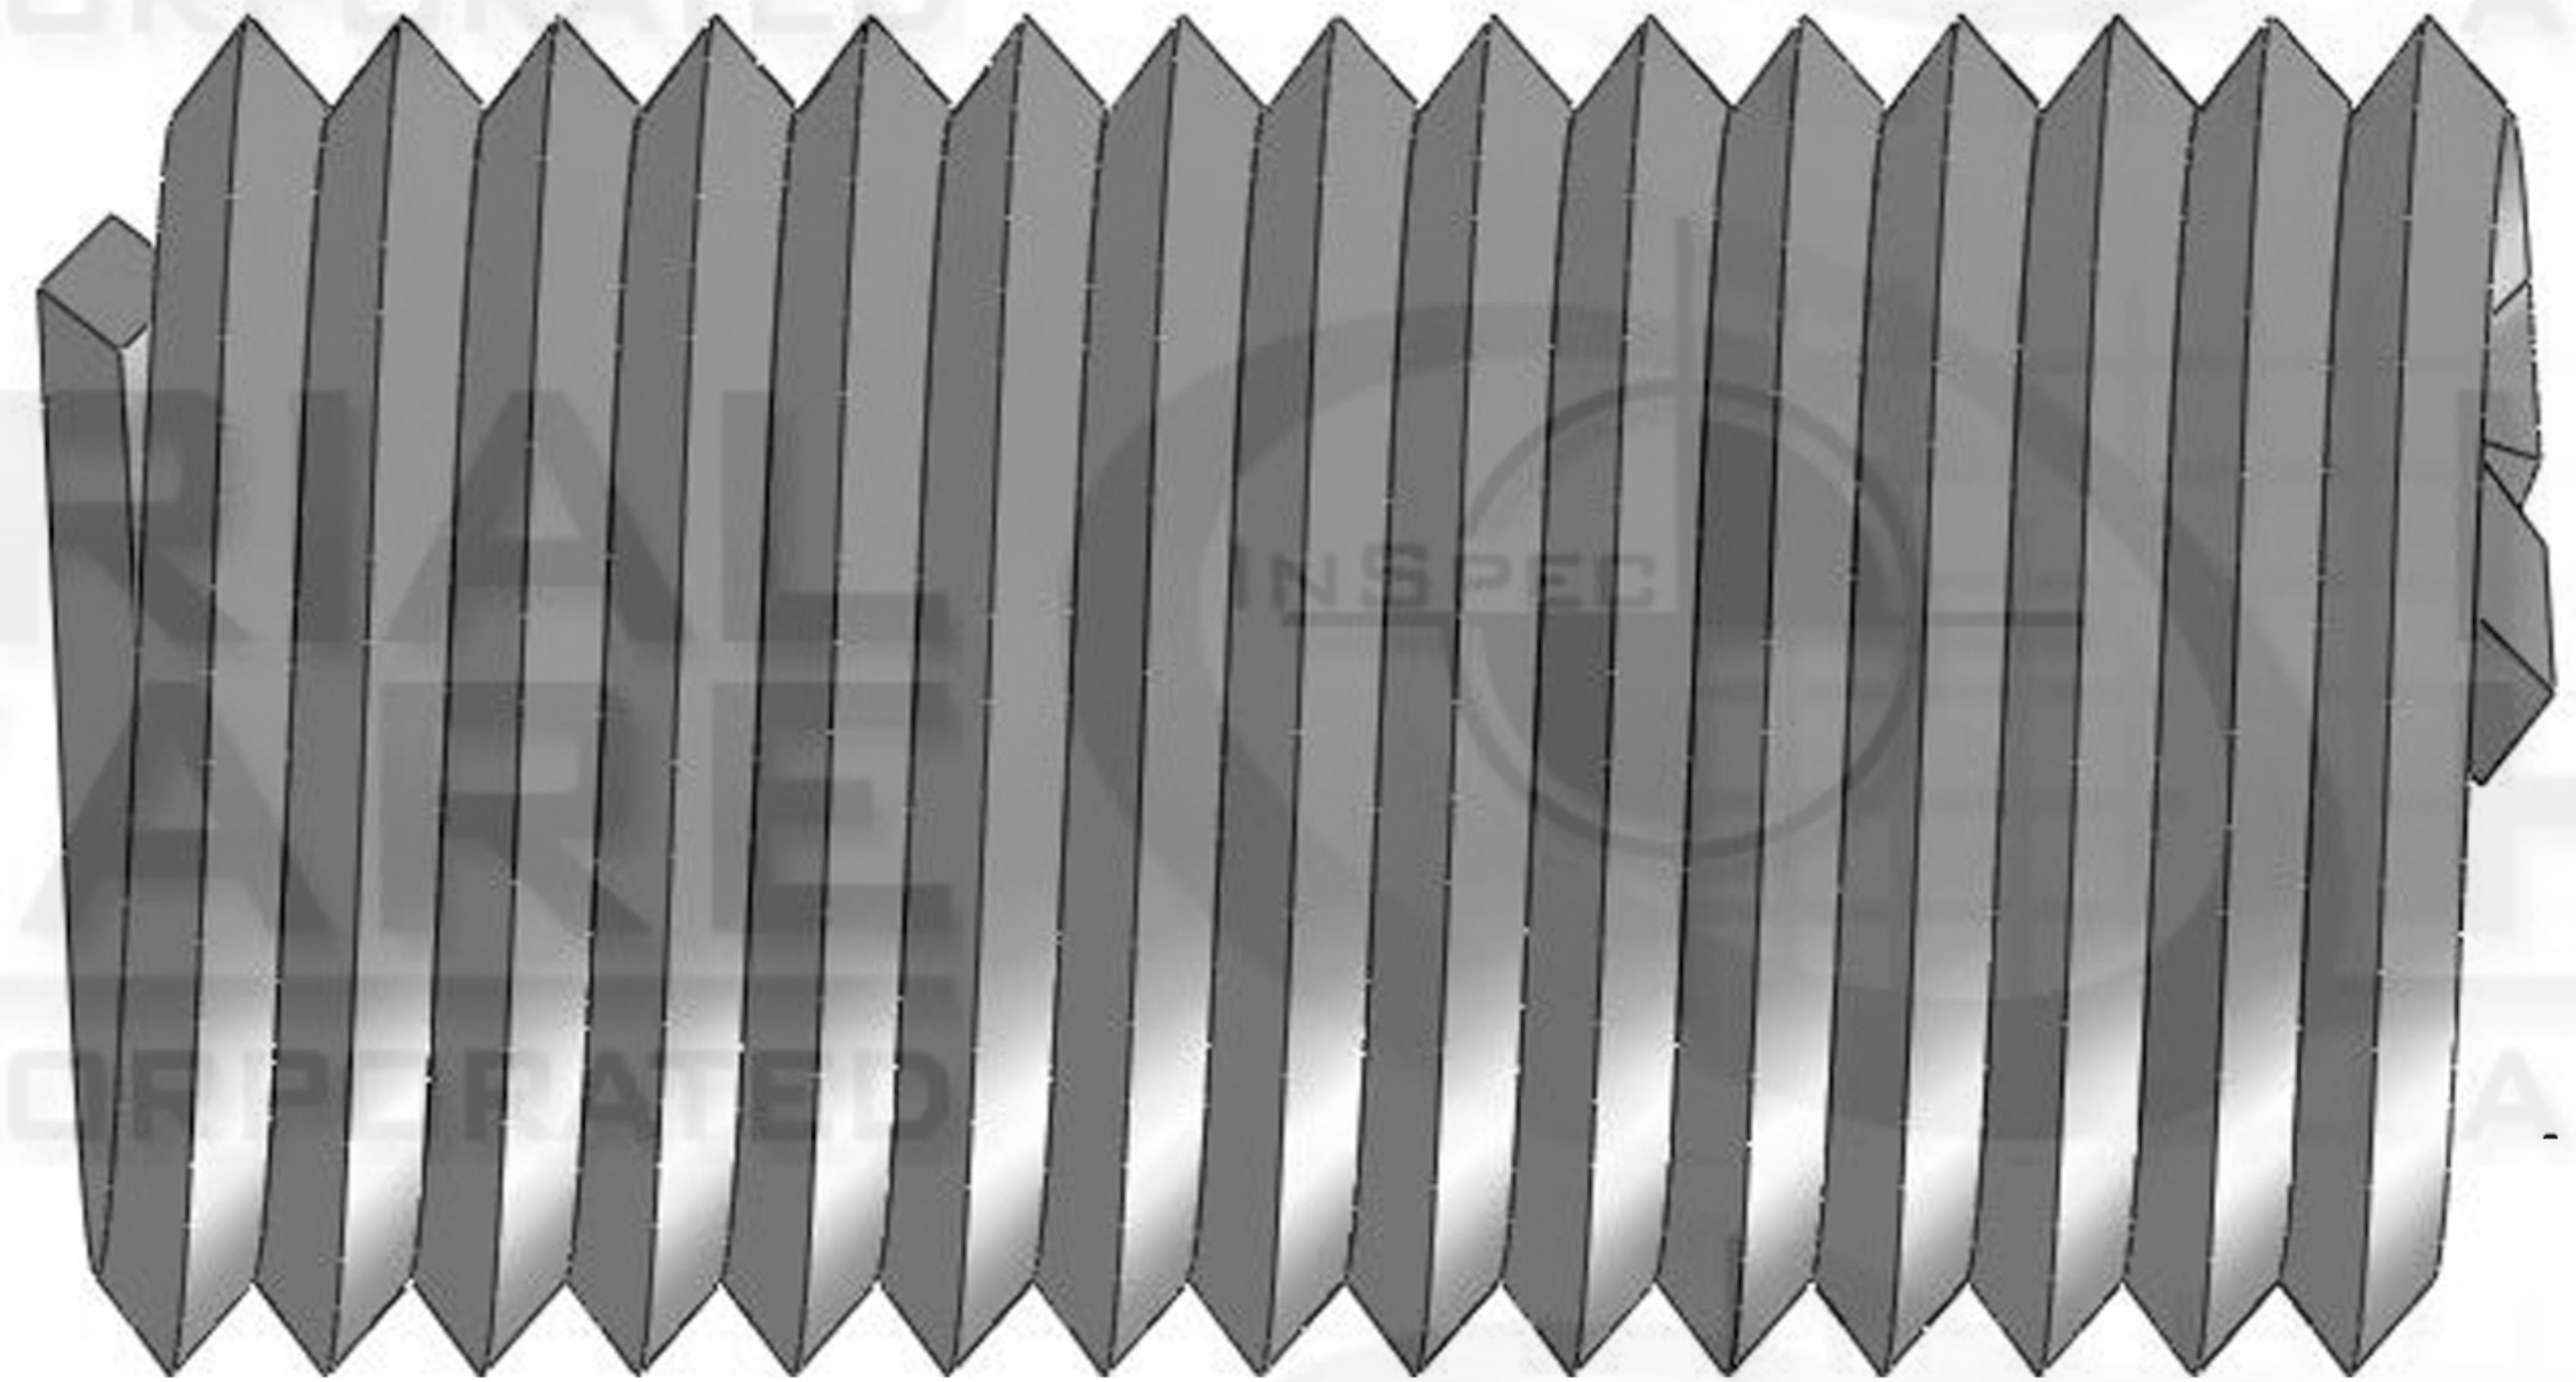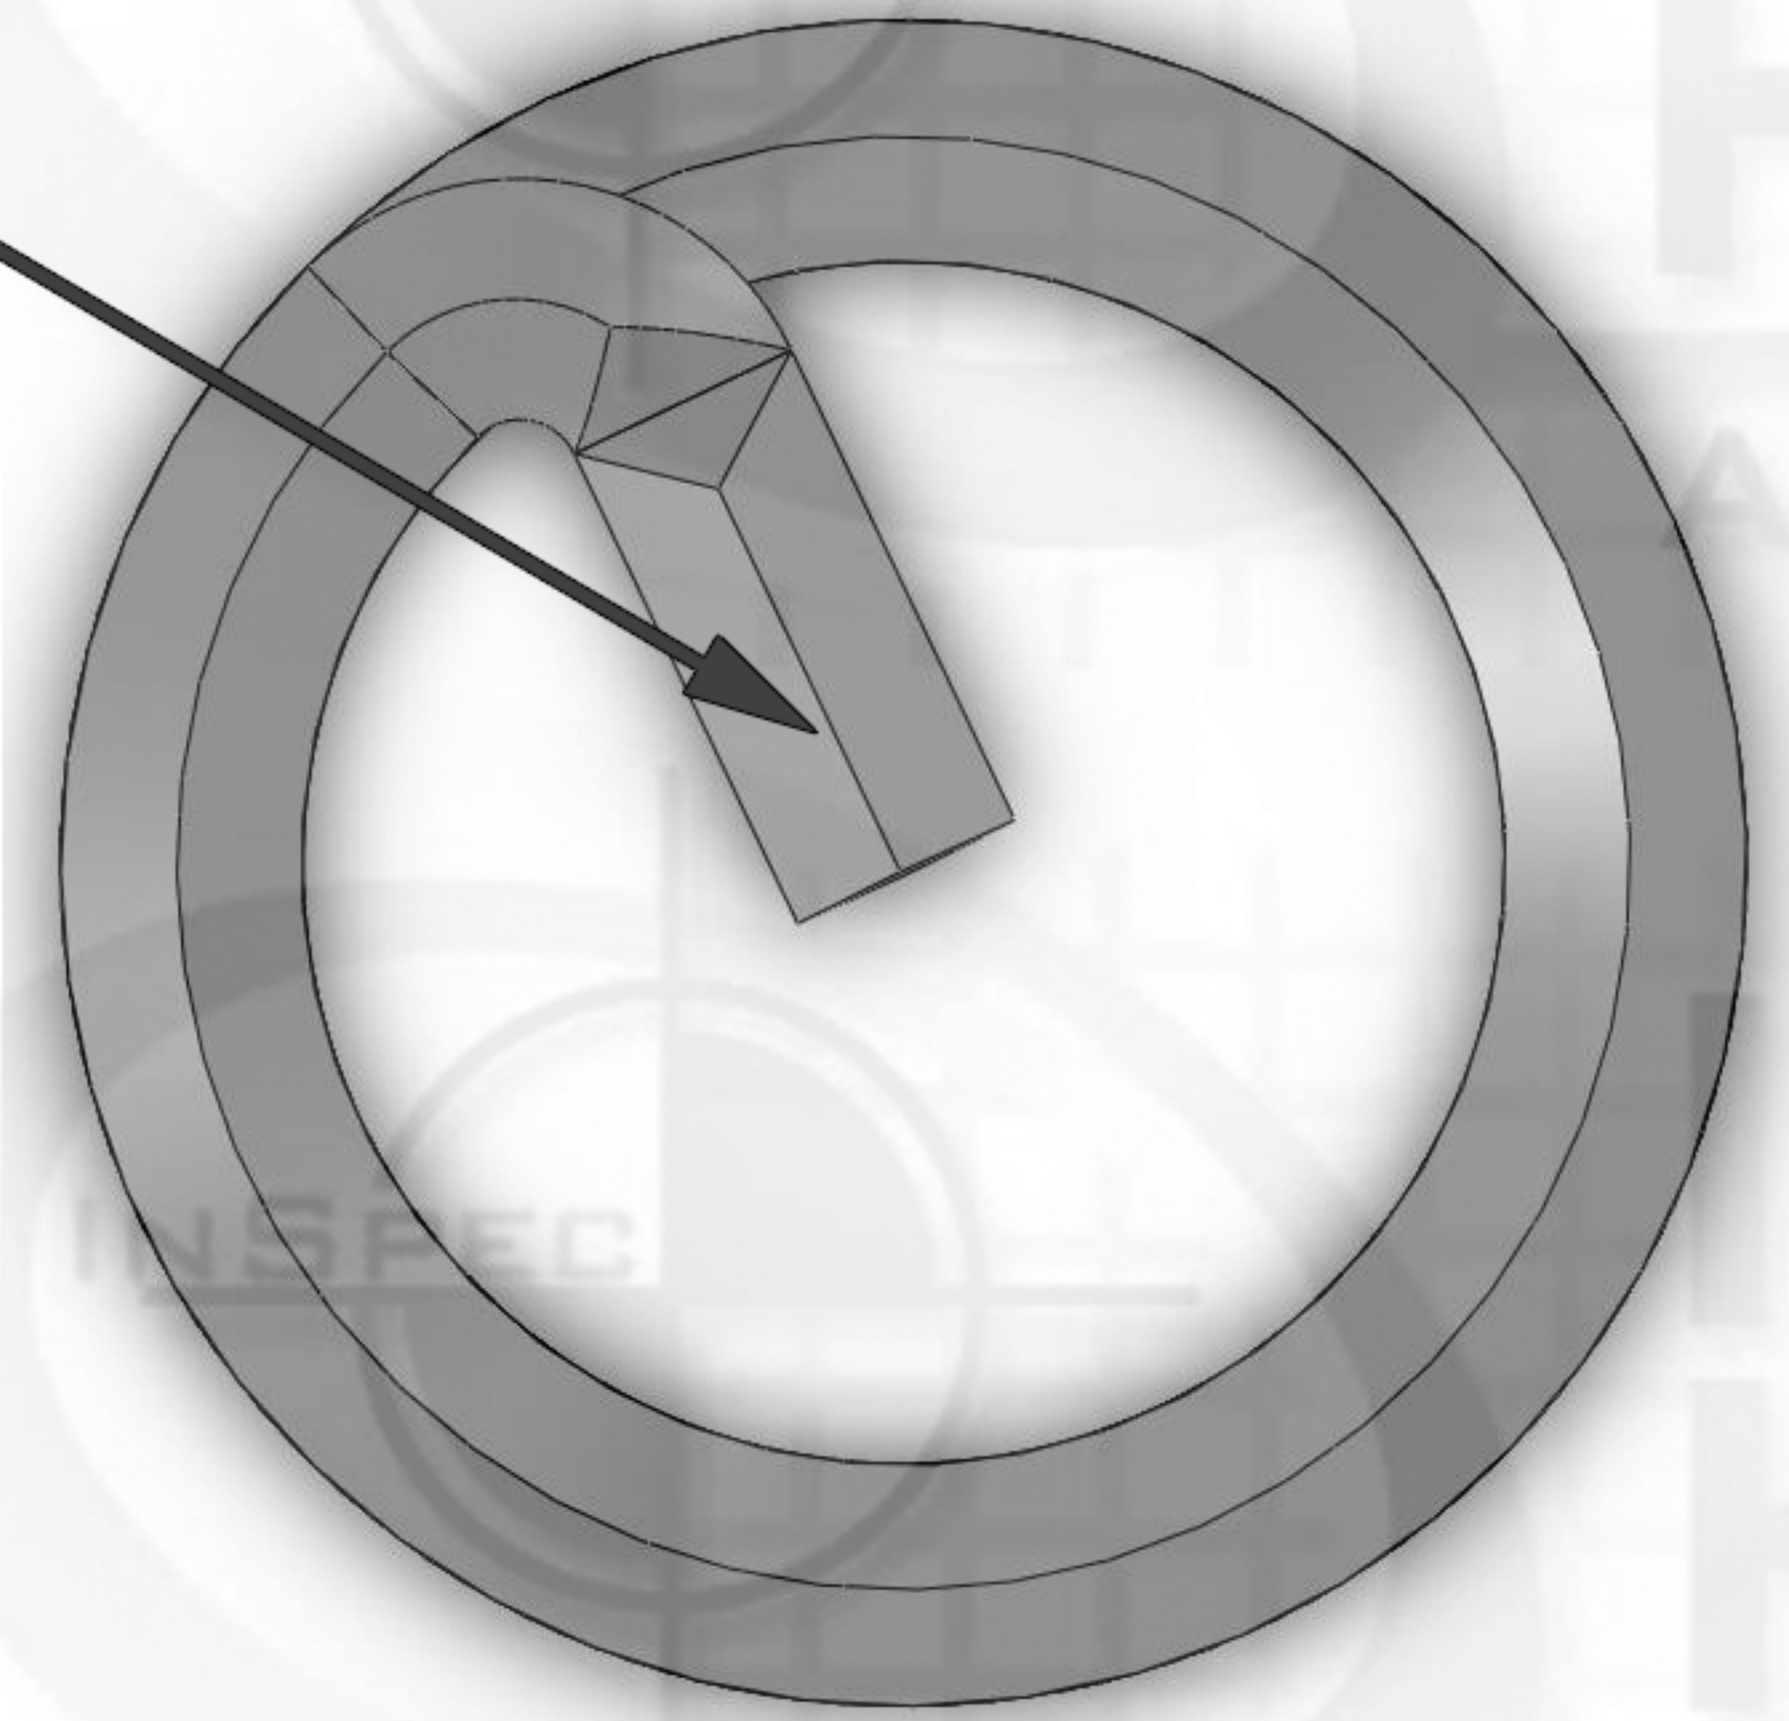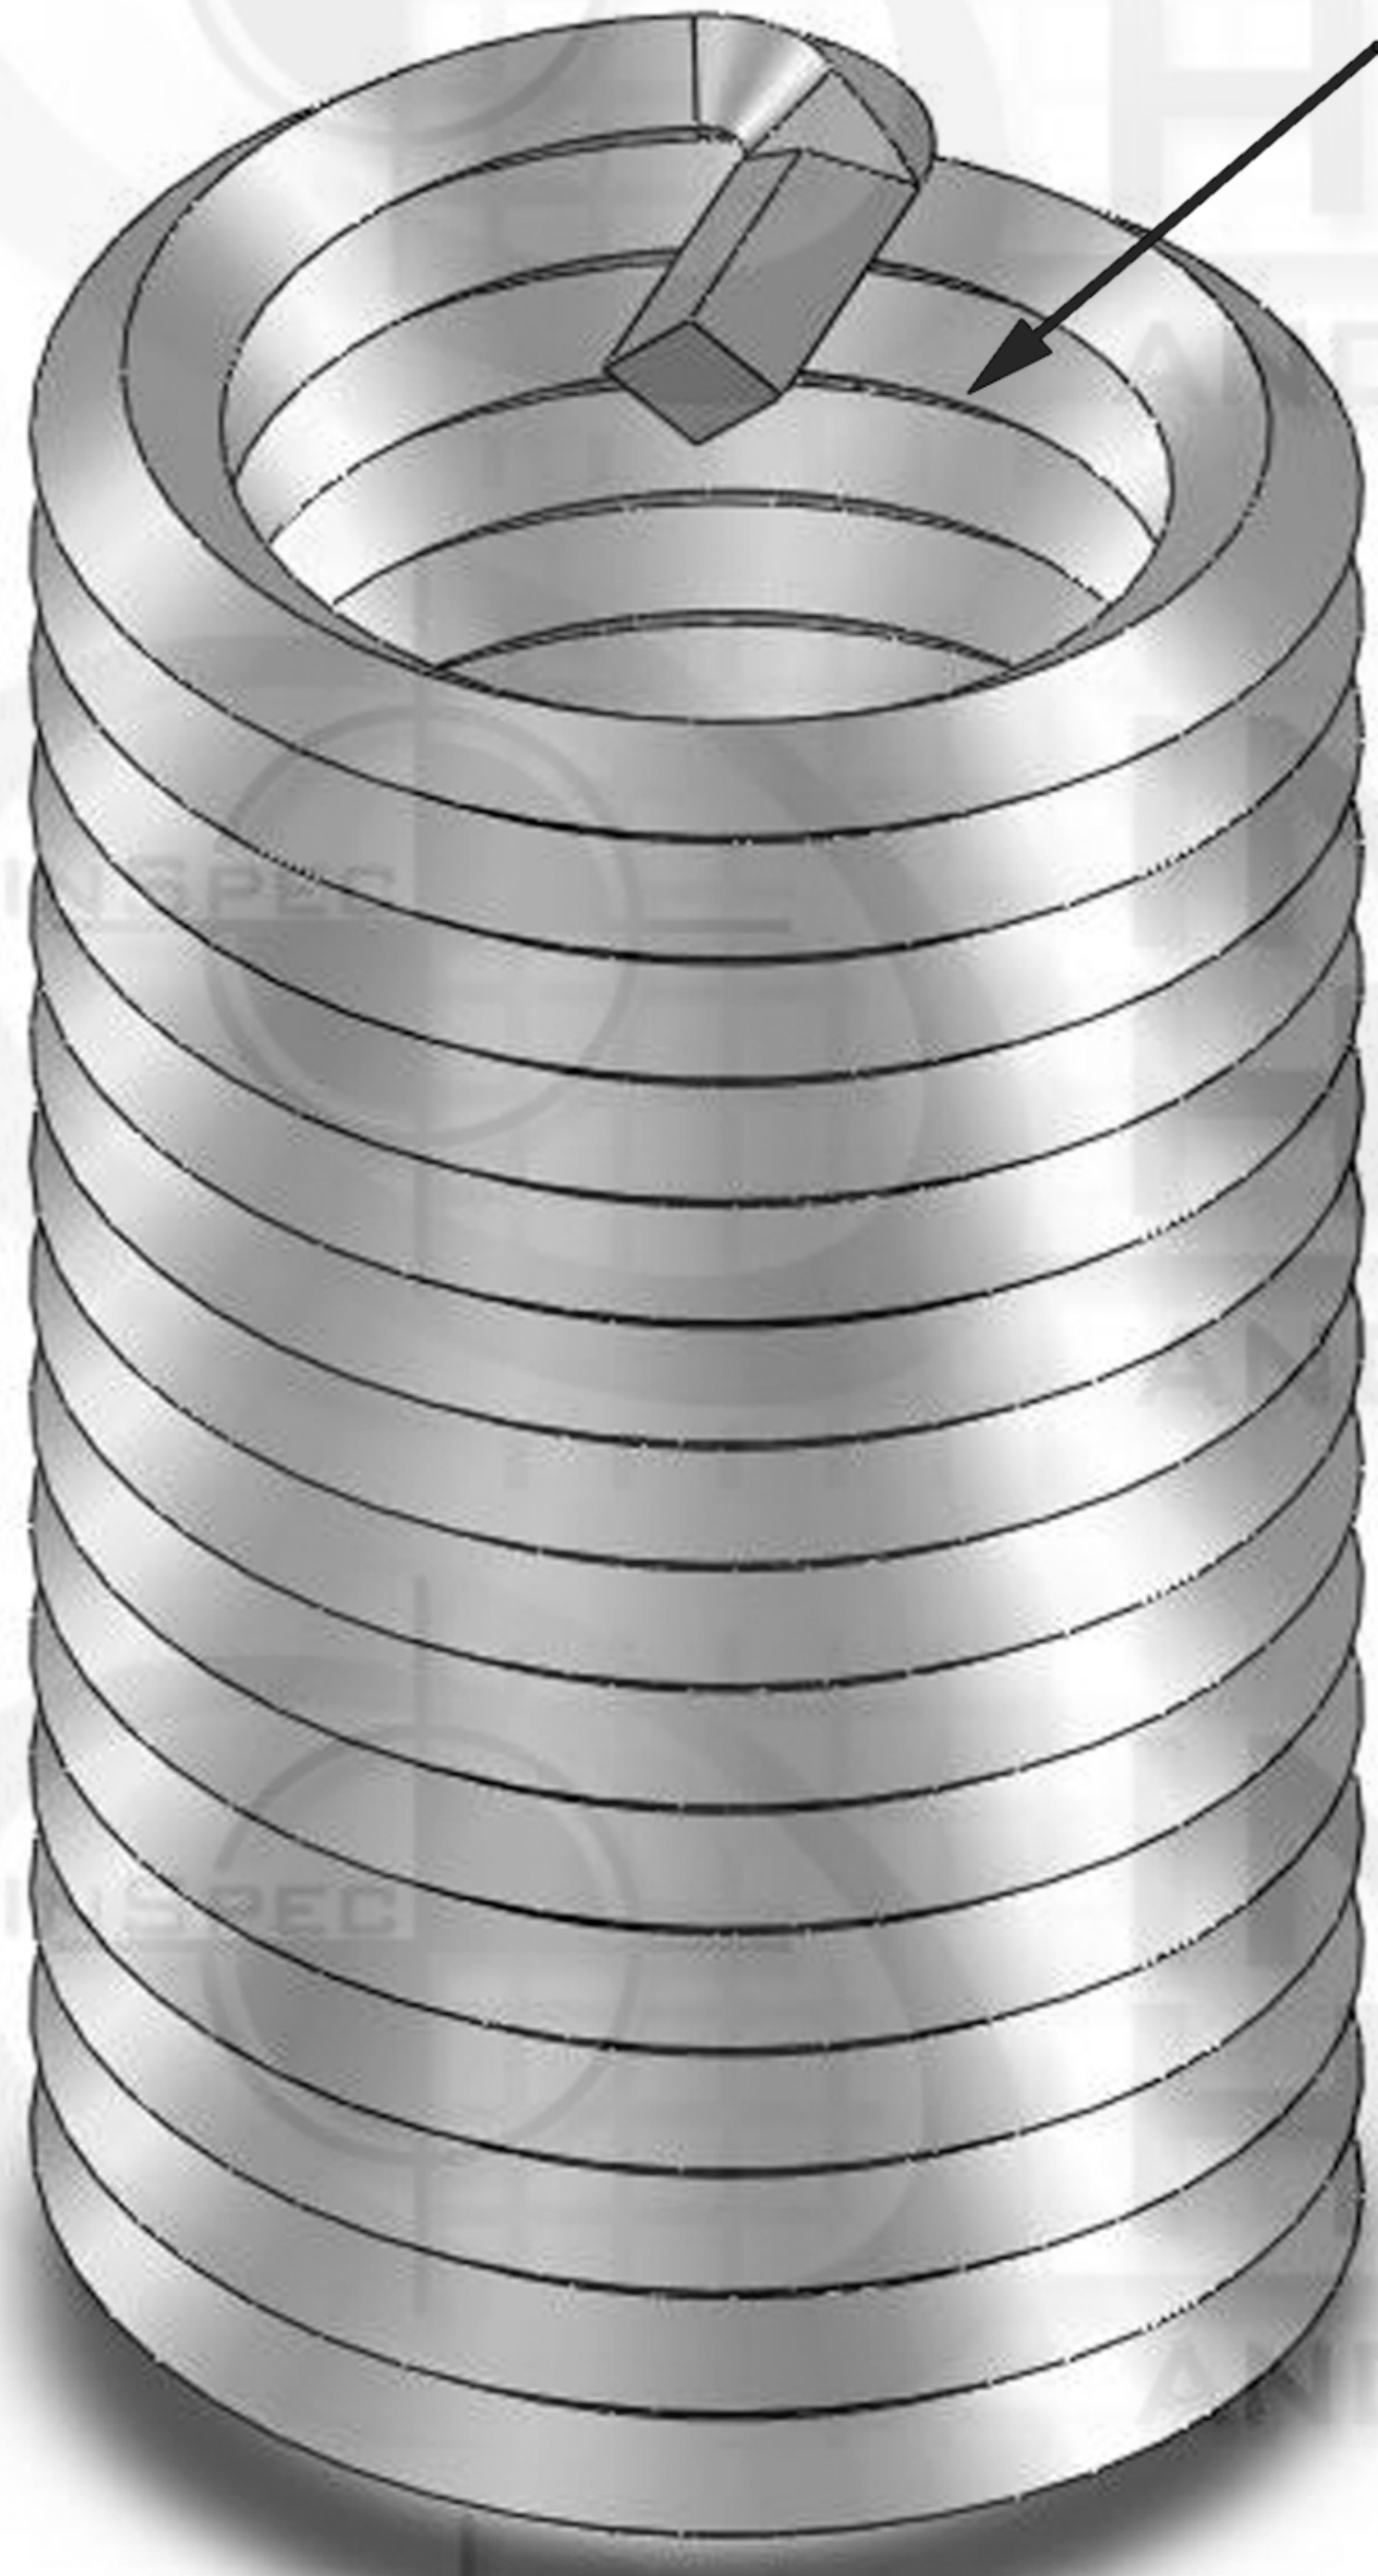


72mm

Suggested Drill Bit Size 1.9488 (49.5mm)

## PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND ITS CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES, INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES, INC. IS STRICTLY PROHIBITED.

TH. STANDARD: ISO Metric	NAME	DATE
ACRONYM: ISO	DRAWN	
ROTATION: Right-Hand	CHECKED	
MATERIAL FINISH	ENG APPR.	
Stainless Steel 18-8	MFG APPR.	
PART NUMBER	Q.A.	
35L7C-C8M2-C48V	COMMENTS:	
NEXT ASSY	USED ON	
APPLICATION	DO NOT SCALE DRAWING	



**INDUSTRIAL  
HARDWARE**  
AND SPECIALTIES INCORPORATED

17-B KENTUCKY AVENUE  
PATERSON, NEW JERSEY 07503  
TEL: 973-684-4010 FAX: 973-684-3095  
email: TechSupport@industrialhardware.com  
www.industrialhardware.com

SIZE	DWG. NO.	REV.
<b>A</b>		
SCALE: 1:8	WEIGHT: 0.32	SHEET 1 OF 1