


SwiftSert Free-Running Slotted

ZONE		REV.	REVISIONS	DATE	APPROVED
			DESCRIPTION		



7.5mm

External Thread Pitch
M8 x 1.25

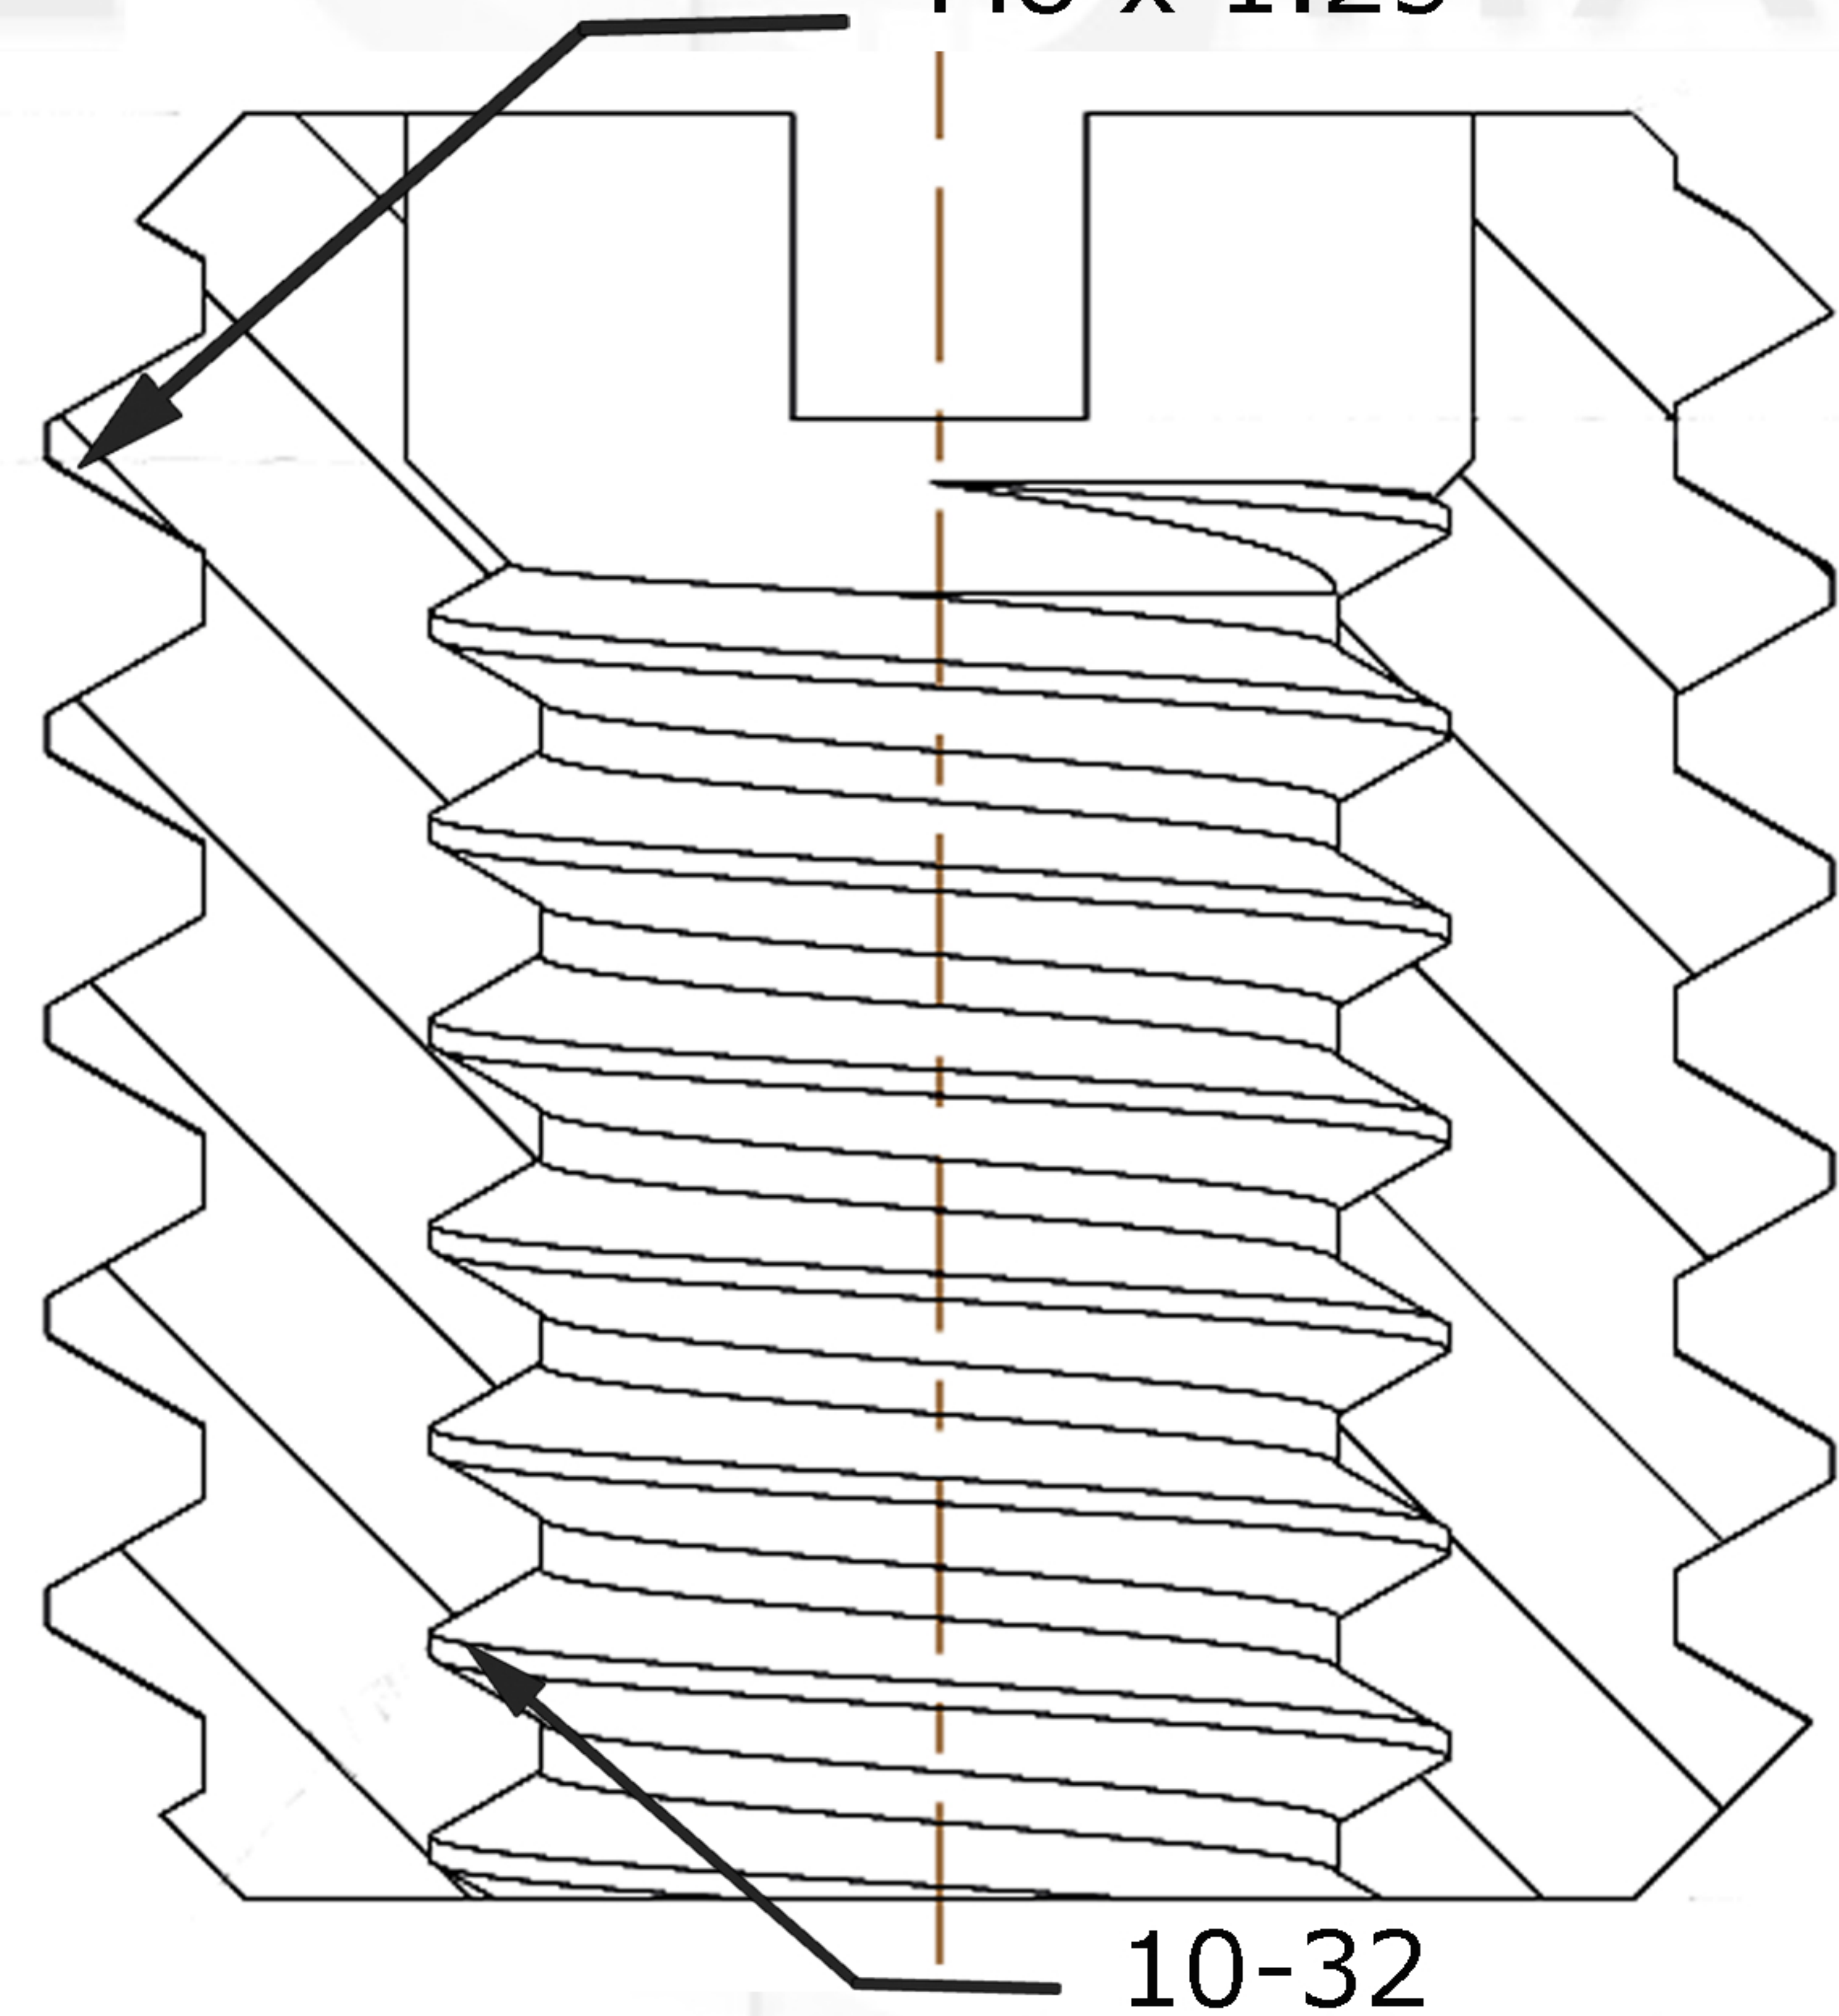

10-32

Internal Thread Pitch

Suggested Drill Bit Size



0.2720 (Letter I)

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

		Internal	NAME	DATE
		TH. STANDARD : ANSI/ASME	DRAWN	
		ACRONYM: UNF	CHECKED	
		ROTATION: Right-Hand	ENG APPR.	
		External	MFG APPR.	
		TH. STANDARD : ISO Metric	Q.A.	
		ACRONYM: ISO		
		ROTATION: Right-Hand	COMMENTS:	
		MATERIAL FINISH		
		Carbon Steel 12L14		
NEXT ASSY	USED ON	PART NUMBER		
		35L9C-98X0-10-0A		
APPLICATION		DO NOT SCALE DRAWING		



**17-B KENTUCKY AVENUE
PATERSON, NEW JERSEY 07503
TEL: 973-684-4010 FAX: 973-684-3095
email: TechSupport@industrialhardware.com
www.industrialhardware.com**

SIZE	DWG. NO.	REV.
A		
SCALE:1:8	WEIGHT:	SHEET 1 OF 1