


# SwiftSert Free-Running Slotted

REVISIONS		DATE	APPROVED
ZONE	REV.	DESCRIPTION	



0.515

External Thread Pitch  
9/16-12

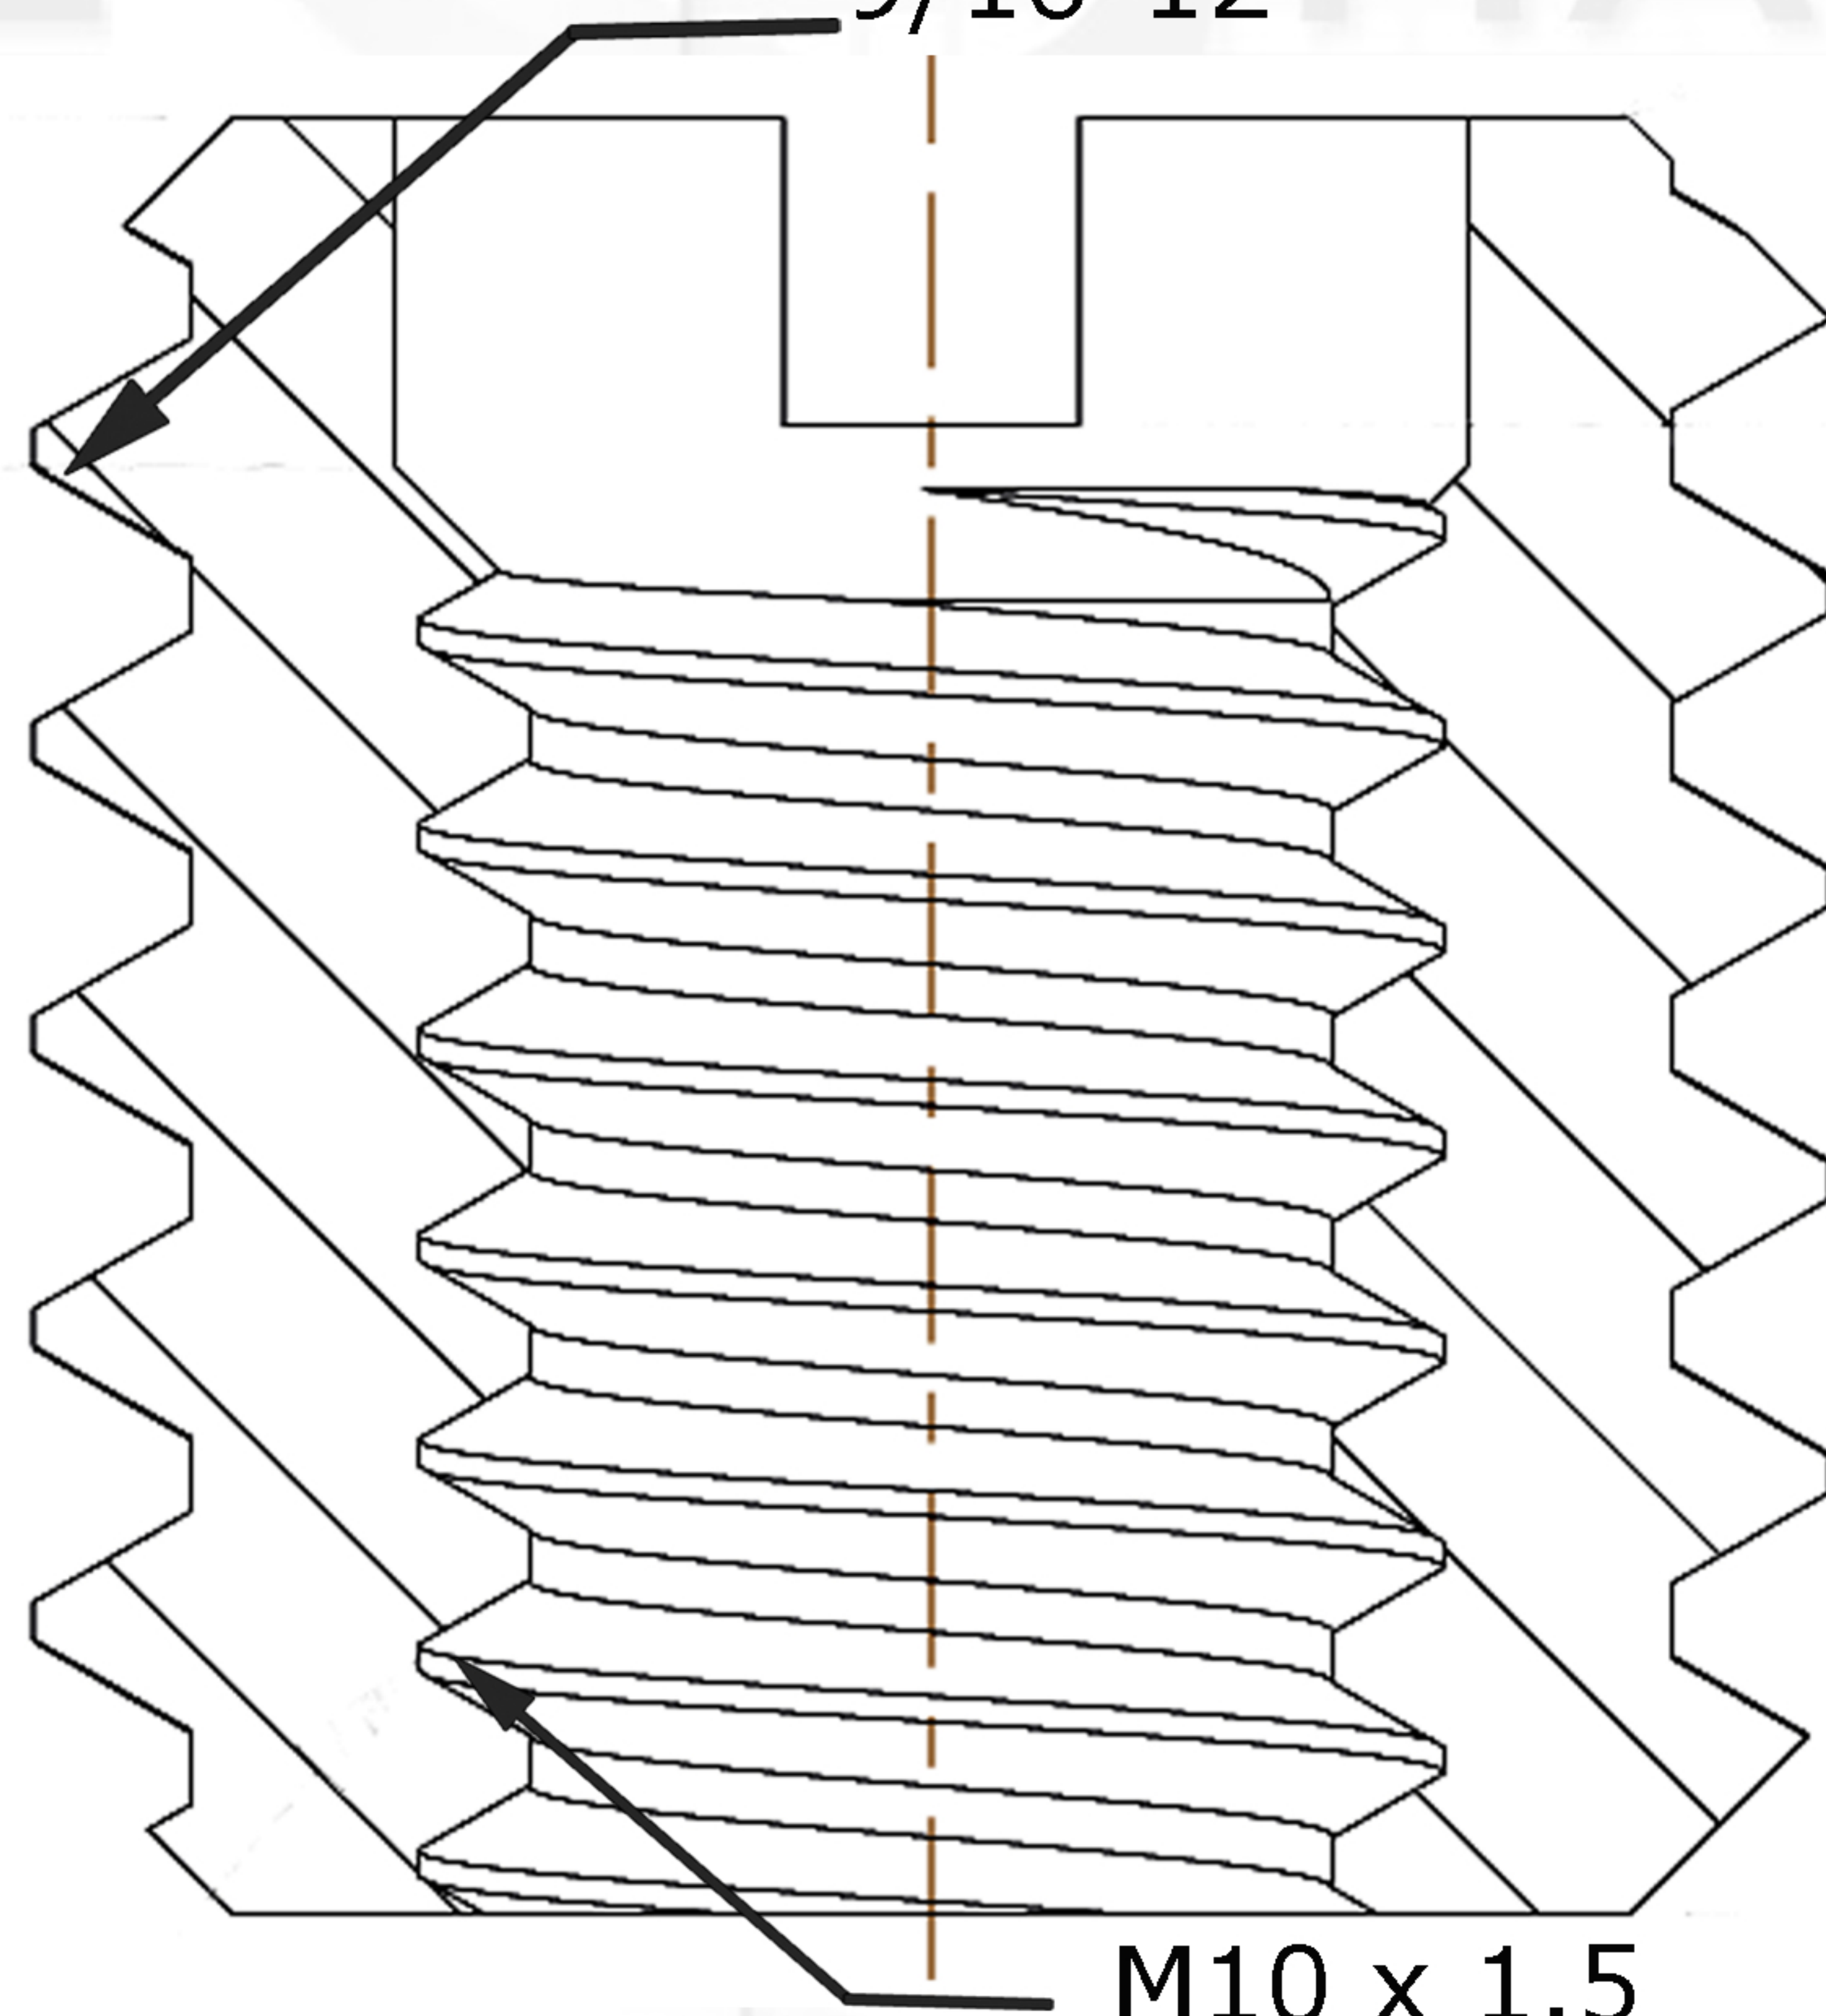

M10 x 1.5

Internal Thread Pitch

Suggested Drill Bit Size



0.4844 (31/64)

## PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

		<b>Internal</b> TH. STANDARD : ISO Metric ACRONYM: ISO ROTATION: Right-Hand	NAME	DATE
		<b>External</b> TH. STANDARD : ANSI/ASME ACRONYM: UNC ROTATION: Right-Hand	DRAWN	
		MATERIAL FINISH Carbon Steel 12L14	CHECKED	
		PART NUMBER 35L9C-98XG-C10J-0A	ENG APPR.	
NEXT ASSY	USED ON		MFG APPR.	
			Q.A.	
			COMMENTS:	
APPLICATION		DO NOT SCALE DRAWING		



17-B KENTUCKY AVENUE  
PATERSON, NEW JERSEY 07503  
TEL: 973-684-4010 FAX: 973-684-3095  
email: TechSupport@industrialhardware.com  
www.industrialhardware.com

SIZE <b>A</b>	DWG. NO.	REV.
SCALE:1:8	WEIGHT:	SHEET 1 OF 1