


# SwiftSert Free-Running Slotted

ZONE		REV.	REVISIONS	DATE	APPROVED
			DESCRIPTION		



0.406

External Thread Pitch  
3/8-16

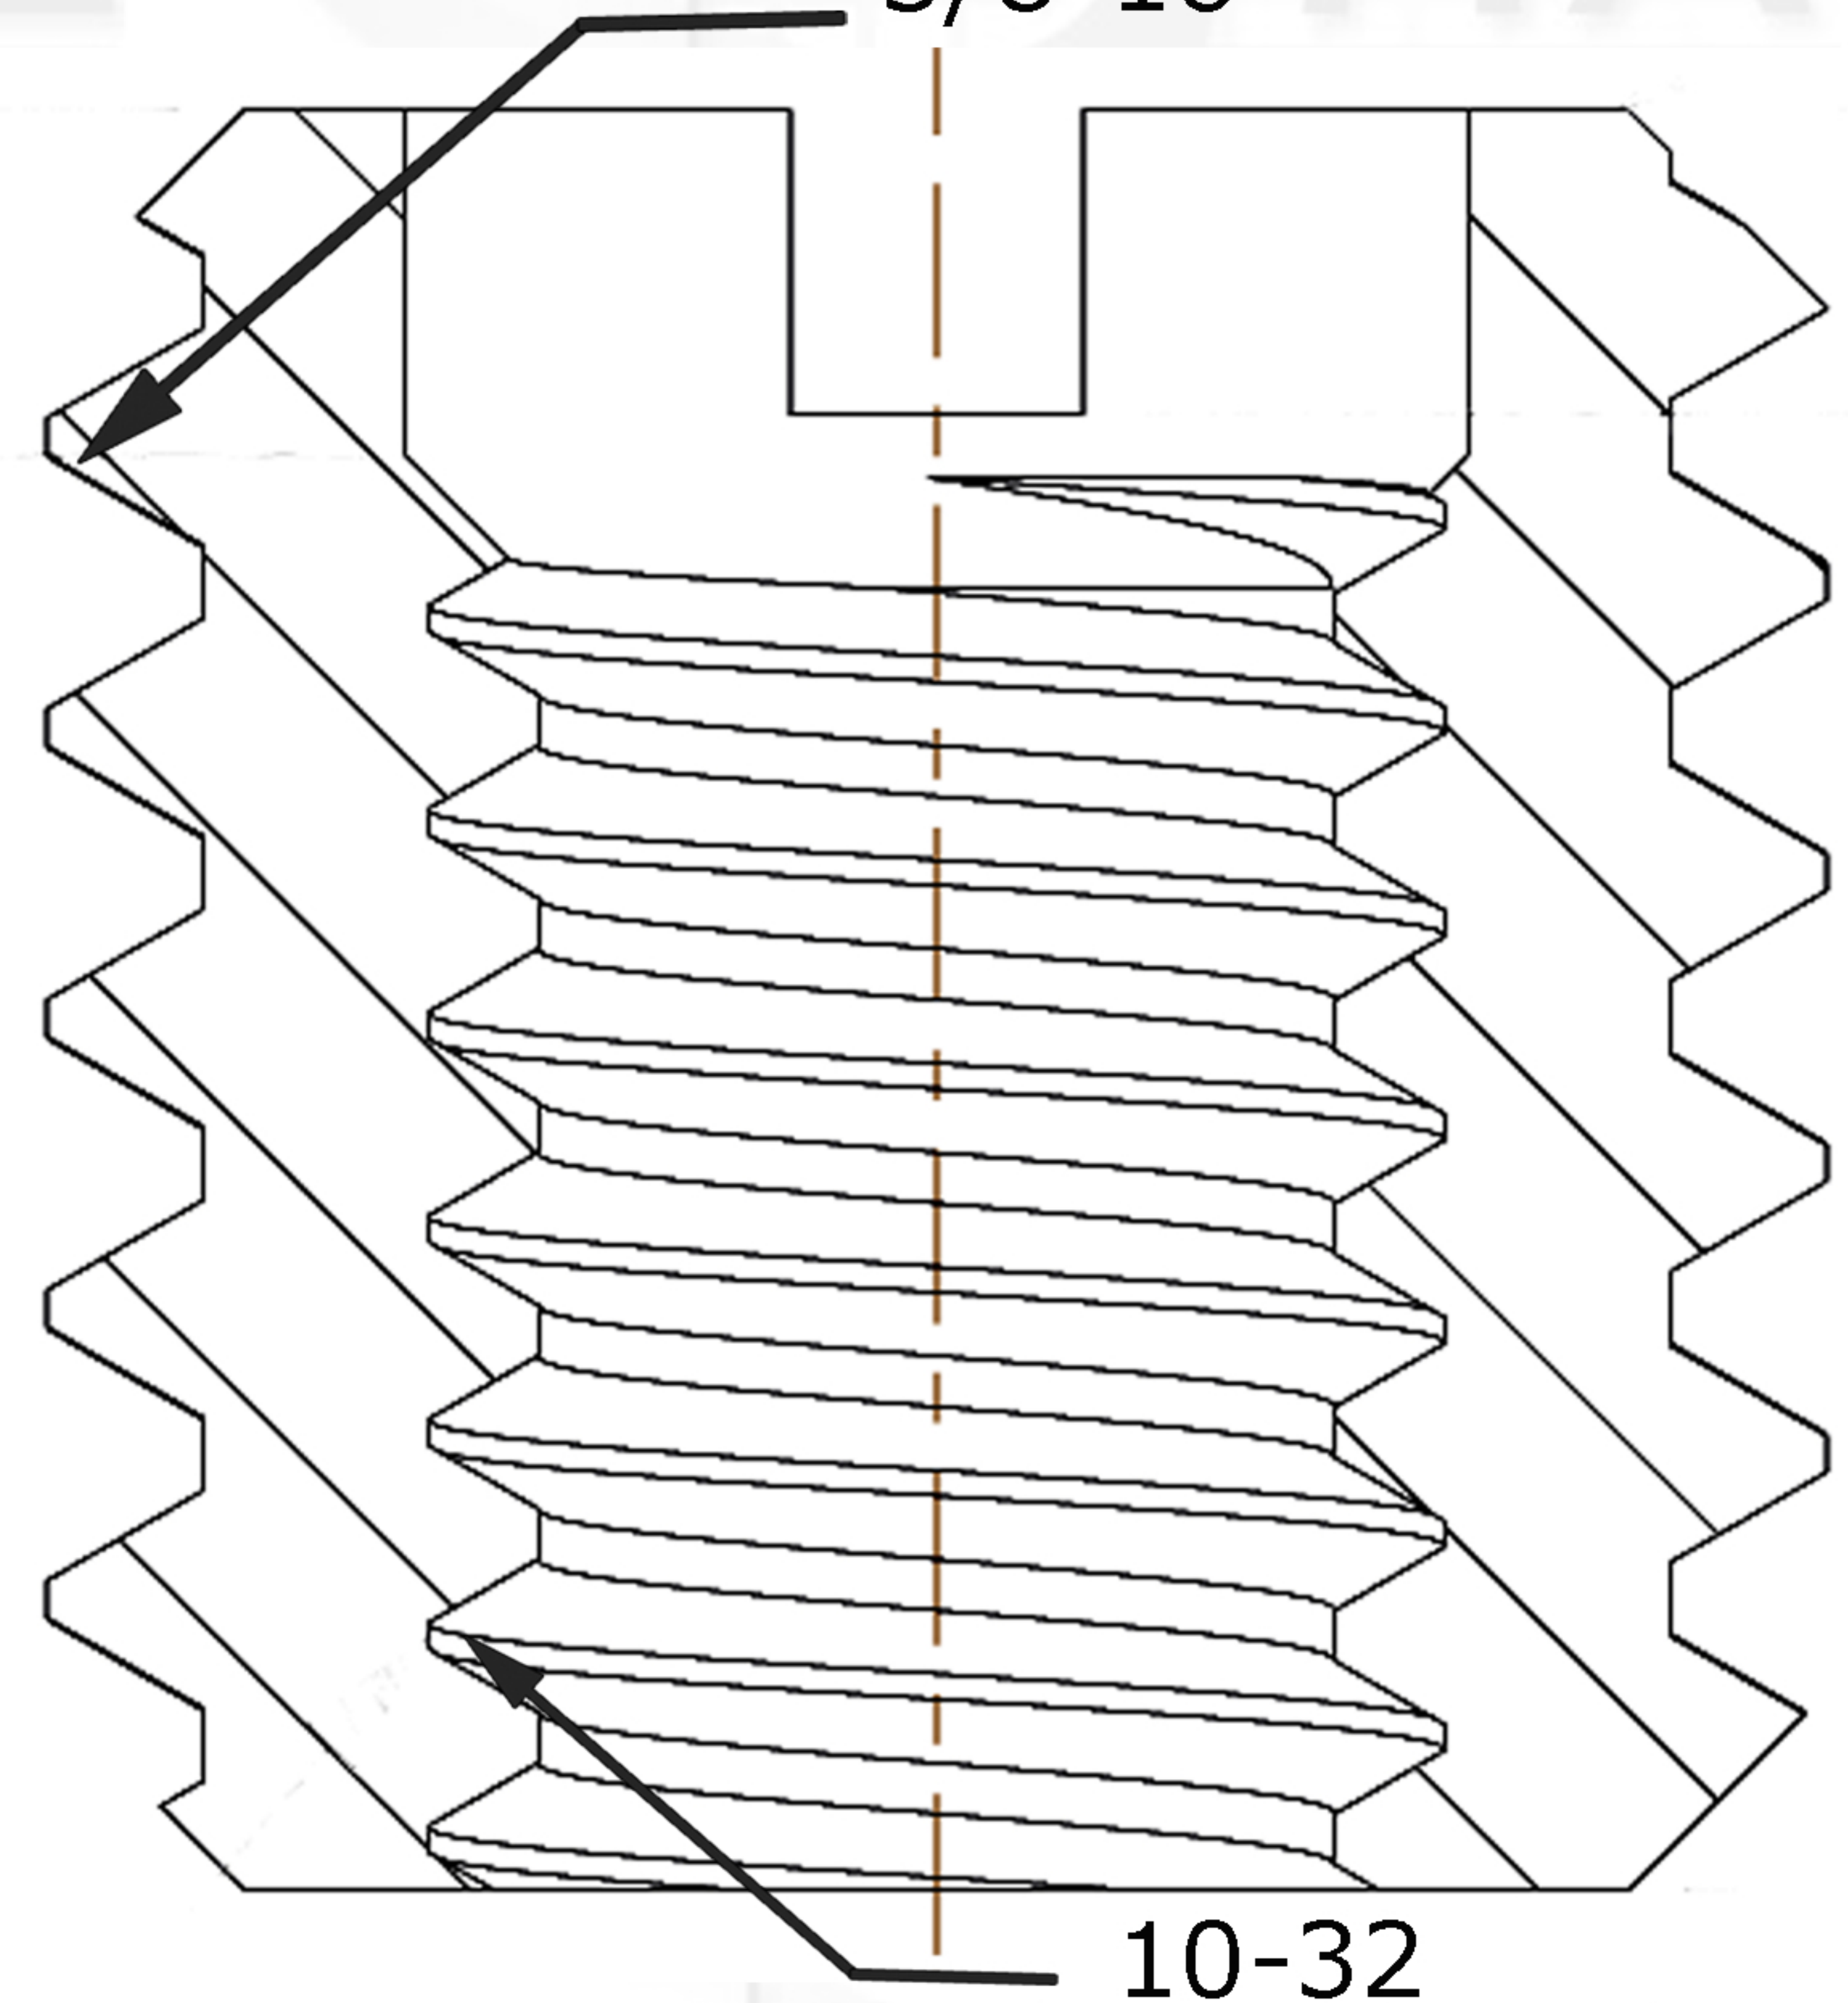

10-32

Internal Thread Pitch

Suggested Drill Bit Size



0.3125 (5/16)

## PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

		<b>Internal</b>	NAME	DATE
		TH. STANDARD : ANSI/ASME	DRAWN	
		ACRONYM: UNF	CHECKED	
		ROTATION: Right-Hand	ENG APPR.	
		<b>External</b>	MFG APPR.	
		TH. STANDARD : ANSI/ASME	Q.A.	
		ACRONYM: UNC		
		ROTATION: Right-Hand	COMMENTS:	
		MATERIAL FINISH		
		Carbon Steel 12L14		
NEXT ASSY	USED ON	PART NUMBER		
		35L9C-99VY-10-0A		
APPLICATION		DO NOT SCALE DRAWING		



**17-B KENTUCKY AVENUE  
PATERSON, NEW JERSEY 07503  
TEL: 973-684-4010 FAX: 973-684-3095  
email: TechSupport@industrialhardware.com  
www.industrialhardware.com**

SIZE	DWG. NO.	REV.
<b>A</b>		
SCALE:1:8	WEIGHT:	SHEET 1 OF 1