

SESAME ACCESS DOOR

MODEL KSTDW

For Drywall Ceilings

DATE



KARP ASSOCIATES, INC.

260 Spagnoli Road Melville, NY 11747 (631) 768-8300 - Phone (631) 768-8350 - Fax

SPECIFICATIONS

GENERAL SCOPE:

Access doors shall be Karp Type KSTDW as manufactured by Karp Associates, Inc., Melville, N.Y. Sizes shall be as indicated on the drawings.

CONSTRUCTION:


- 1. Frame shall be 20 gage galvanized steel.
- 2. Door shall be 20 gage galvanized steel and shall be lined with 1/2" thick polyiso insulation panel.
- 3. Gasketing shall be flame retardant polyurethane.
- 4. Locks shall have plastic grommets and shall be square head key wrench operated.
- 5. Hinge shall be concealed pivot with a controlled action device (CAD), except for size $12" \times 12"$.

STANDARD SIZES

DOOR SIZE H x W (INCHES)	SHIPPING WT. (LBS.)		
12 x 12	8.2		
18 x 18	16.7		
24 x 24	17.6		
36 x 24	44.4		
48 x 24	32.6		

PROJECT DATA							
Project	Name:						
Archite	ct:						
Contractor:							
Agent/Customer Name:							
Tagging Instructions:							
Special Instructions:							
To be purchased from Industrial Hardware & Specialties, Inc.							
www.industrialhardware.com							
T:973-684-4010 Fax:973-684-3095							
PROJECT SCHEDULE							
<u> </u>			No. of		_	_	

PROJECT SCHEDULE						
Qty.	Н	w	No. of Latches	Finish	Remarks	

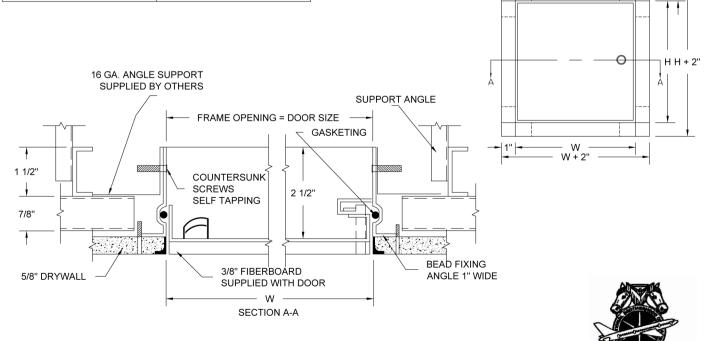

1"