




Sharp Leg “GX” Style Clamps


- Designed to Lift Stacked Plates From Horizontal to Vertical Positions in A 90° Arc (Not 180°)
- Long Sharp Leg Can Be Driven Between Top Two Plates to Fully Engage the Clamp
- Clamps Are 100% Proof Tested and Certificate of Test Supplied with Each Clamp
- Minimum WLL of at Least 10% of the Maximum WLL
- Replacement Parts Are Same As for Standard “GX” Clamps

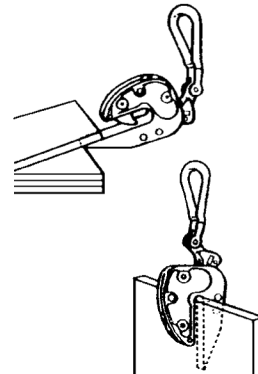

Catalog No.	UPC No. 020418	Grip Range	Working Load Limit (Metric Tons)	Weight Each
6423500	175534	1/16 to 5/8 in.	1/2 t	5.00 lb
6423505	175541	1/16 to 3/4 in.	1 t	9.00 lb

Locking “E” Clamps

- Clamp Lifts From Either Horizontal or Vertical Position
- Clamps Turn Plates Through 90°
- Locks Open or Closed with a Lever
- Has Large Throat That Gives a Secure Bite and Wide Grip Range
- Clamps Are 100% Proof Tested and Certificate of Test Supplied with Each Clamp
- Minimum WLL of at Least 10% of the Maximum WLL
- Note: Be Sure Clamp is in Lock Closed Position Before Making Lift
- Warning: NEVER Tamper with a Clamps Tension Arm or Spring Mechanism During a Lift. DO NOT Add Rope or Other Material to the Lock Mechanism to Lengthen.



Catalog No.	UPC No. 020418	Model No.	Grip Range	Working Load Limit (Metric Tons)	Weight Each	A Dim.	B Dim.	C Dim.	D Dim.	E Dim.	H Dim.	J Dim.
6420701	096112	3E	0 to 1-1/4 in.	3 t	20.00 lb	7-1/4 in	14-3/8 in	9-1/4 in	3-1/2 in	2 in	2 in	4-3/8 in
6420702	096129	5E	0 to 1-1/2 in.	5 t	28.00 lb	8-7/8 in	16 in	10-1/2 in	3-1/2 in	2-1/2 in	2-11/16 in	5 in
6420703	096136	5E	1-1/4 to 2-1/2 in.	5 t	33.00 lb	10-1/2 in	16-5/8 in	11-1/4 in	3-1/2 in	2-1/2 in	3-1/8 in	5-1/4 in
6420705	096150	8E	1/2 to 2-1/2 in.	8 t	81.00 lb	14-1/8 in	22-3/4 in	15-3/4 in	5 in	3-1/2 in	4-7/8 in	8-1/2 in