

## Pneumatic Cutters

### Rod Cutter Workhead

- Heavy-duty model for 90-130 psi or lightweight model for 80-120 psi
- Used in the wire-shelving industry
- No exhaust shock
- 4 cutterheads available for a wide range of production needs: center-cut, clipper-cut, angular jaws, and end-cut
- Cuts soft, medium, or hard materials (refer to chart on pages 300 - 301)
- Heavy-duty workhead (9290 series) has 5" bore (127mm) and 3" stroke (76mm)
- Light duty workhead (9190 series) has 4" bore (102mm) and 2" stroke (51mm)
- Cutting controlled by manual pressure
- Filter-lubricator units recommended in air supply line for long tool service




Cat No.	UPC No.	Description	A		B		C		Approx. Weight		Capacity	
			Inch	mm	Inch	mm	Inch	mm	lb	K	Inch	mm
9190C	037103924476	Light duty, Center Cut	15	381	7 1/4	184	3 1/8	79	11	5	3/8	10
9190CL	037103144379	Light duty, Center Cut	15	381	7 1/4	184	3 1/8	79	10	4	3/8	10
9190NE	037103924513	Light duty, Clipper Cut	15	381	7 1/4	184	3 1/8	79	11	5	3/8	10
9190A	037103924452	Light duty, Angular Cut	15	381	7 1/4	184	3 1/8	79	11	5	3/8	10
9290C	037103924988	Heavy duty, Center Cut	17 1/2	445	10	254	3 3/4	95	18 1/4	9	1/2	13
9290NE	037103924995	Heavy duty, Clipper Cut	17 1/2	445	10	254	3 3/4	95	18 1/4	9	1/2	13

H.K. Porter

## Cable Cutter

- Extremely fast cutter
- Cuts copper or aluminum cable
- Operates on 80-100 psi (6-7 kg/cm<sup>2</sup>)
- 2 control valves available: 34468, air/foot switch, or W37048, solenoid-operated (electric) foot switch
- Specify control valve when ordering
- **Made to order. Check with Customer Service for lead time**

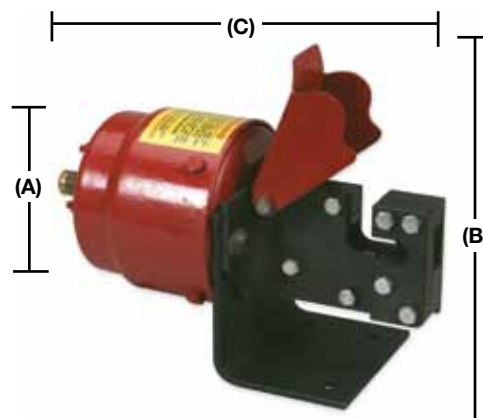

Cat No.	UPC No.	A		B		C		Approx. Weight		Capacity	
		Inch	mm	Inch	mm	Inch	mm	lb	K	Inch	mm
27842	037103916501	6 3/4	171	8	203	13	330	27	12	7/8	23

## Sales Demonstration Kits

Sales demonstration kits for on-site demonstration are available through your Cooper Hand Tools sales representative.